

Description

Immersion sensors TFT-(V4A)-2G3D-... measure temperatures in non-condensing, aggressive ambient air. In combination with transmitters with an intrinsically safe circuit, the transmitters may be used within hazardous areas of zones 1, 2 and 22. The sensor is a passive, potential-free sensor and provides a resistance change following the temperature. An Ex-i transmitter converts this resistance change into a 0...10 VDC and/or 4...20 mA output signal. Areas of application are pipelines in the entire plant construction and industrial areas.

ATEX-compliant for zones 1, 2 and 22 according to the ATEX Directive 2014/34/EU.



(Fig. similar)

Delivery program

Type	Product No.	Protective tube	Sensor
TFT-2G3D-100-Pt100	057.1220	Nickel-plated brass, L = 100 mm	Pt100
TFT-2G3D-400-Pt100	057.1226	Nickel-plated brass, L = 400 mm	Pt100
TFT-2G3D-100-PT1000	057.1223	Nickel-plated brass, L = 100 mm	Pt1000
TFT-V4A-2G3D-100-Pt100	057.1222	Stainless steel, L = 100 mm	Pt100
TFT-V4A-2G3D-150-Pt100	057.1224	Stainless steel, L = 150 mm	Pt100
TFT-V4A-2G3D-200-Pt100	057.1221	Stainless steel, L = 200 mm	Pt100

Intrinsic

Simple electrical equipment according to IEC/EN 60079-11, Section 5.7, suitable for zone 1, 2 and 22. Only for connection to intrinsically safe circuits.

The specified values at the terminals must not be exceeded.

$U_o \leq U_i$	$6.5 \text{ V} \leq 30 \text{ V}$
$I_o \leq I_i$	$19.7 \text{ mA} \leq 50 \text{ mA}$
$P_o \leq P_i$	$32 \text{ mW} \leq 100 \text{ mW}$
$C_o \geq C_i + C_{\text{Cable}}$	$C_i = 0 \text{ } \mu\text{F}$
$L_o \geq L_i + L_{\text{Cable}}$	$L_i = 0 \text{ } \mu\text{H}$
$C_{\text{Cable}}, L_{\text{Cable}}$: see the specifications of the cable manufacturer	
C_o, L_o : see the documentation for the transmitter according to the gas group	

Technical data

Supply	Via transmitters
Installation location	Vertical, vibration-free
Process connection	Thread G1/2
Accuracy	Class B
Sensor current	< 2 mA
Ambient temperature range	$T_a = -30...+60 \text{ }^\circ\text{C}$
Measuring	$T_b = -30...+150 \text{ }^\circ\text{C}$
Storage temperature range	$-40...+70 \text{ }^\circ\text{C}$

Terminal connection	Screw terminals 0.14 - 1.5 mm ²
Bezel material	Plastic, IP65 according to EN 60529
Dimensions of the housing (W × H × D)	68×58×35mm
Safety class	Simple electrical equipment according to EN 60079-11
Temperature class	T6 (max. T85°C)
Included	Immersion temperature sensors

Installation and operation

Safety instructions

All relevant national and international standards and regulations for hazardous areas must be observed. Equipment must be installed in accordance with the manufacturer's instructions. If the device is used in a manner different from that specified by the manufacturer, the safety level of the device may be reduced. EN/IEC 60079-14 can be used for the design, selection and construction of electrical systems.

- Intrinsically safe circuits are designed in such a way that the energy content is below the minimum level that would be required to cause ignition of an explosive atmosphere in the event of a spark occurring.
- Intrinsically safe circuits are shown in light blue and are to be laid separately from non-intrinsically safe circuits.
- The intrinsically safe sensor is passive, potential-free and approved for zones 1, 2 and 22.
- Observe the maximum connection values during instrumentation.
- Clean with damp cloth only. Avoid electrostatic charging. Remove dust deposits.
- The permissible ambient temperature must not be exceeded.

Instructions for commissioning

Notes on mechanical installation and mounting

The installation must be carried out taking into account the relevant regulations and standards valid for the measuring location. In particular, it is necessary to take into account:


- VDE/VDI 3511 Technical temperature measurement/ Guideline
- VDE/VDI 3512 Sheet 2 Measuring arrangement for temperature measurement
- The EMC guidelines must be complied with
- Parallel installation with live cables must be avoided without fail
- It is recommended to use shielded wires. The shield must be placed on one side of the DDC / PLC
- During installation, make sure that errors caused by heat dissipation remain within the permissible error limits and that the max. ambient temperature is not exceeded

Recommended transmitter


- Transmitter from Company Stahl type EXL-IM-9182-10-51-11s
- When using the sensor together with a transmitter recommended by us, the intrinsic safety for simple circuits is proven
- Manufacturer's certificate for zone 1, 2 and 22

Electrical connection

The electrical connection is made according to the operating instructions of the transmitter.

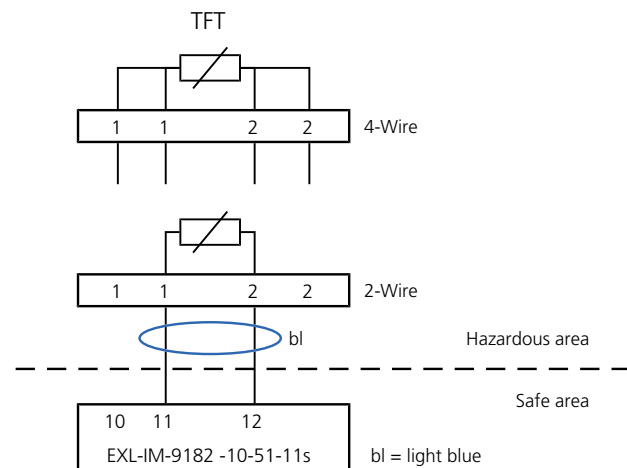

Dimensions

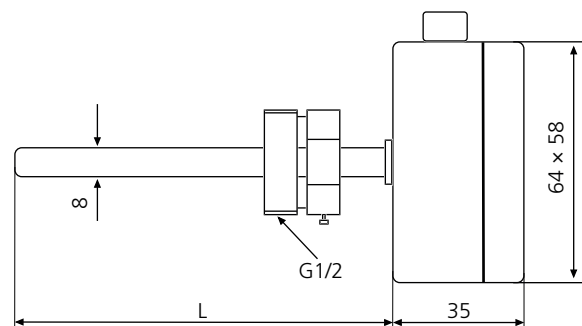

(all measurements in mm)

We, the	
Schischek GmbH Mühlsteig 45 Business Park South 5 90579 Langenzenn GERMANY	
declare under sole responsibility in accordance with the provisions of the guidelines:	
2014/34/EU	
that the product	
TFT-2G3D	
to which this declaration refers, complies with the following norms or normative documents:	
EN 60079-11:2012 EN 60079-31:2014	EN IEC 60079-0:2018+AC:2020-02
Marking:	
<div>CE Zone 1, Zone 2, Zone 22</div> <div>Simple resources</div>	
Managing:	
<div>S. L.</div> <div>(Dr. Sven Ludwig)</div>	
90579 Langenzenn, 2024-09-01	

Manufacturer's declaration for sensors for use in hazardous areas

Item	Immersion temperature sensors	Manufacturer	Schischek GmbH
Type	TFT-2G3D	Property	Passive, potential-free
Installation in	Zone 1, 2, 22	Associated equipment	EXL-IM-9182-11-51-11s

Test goal

The immersion temperature sensor has been tested for suitability for installation and operation in hazardous areas of zones 1, 2 and 22. The test is based on Directive 2014/34/EU (ATEX). The standards applied are EN 60079-0, EN 60079-11 and EN 60079-31. The immersion temperature sensor is a simple electrical device within the meaning of EN 60079-11 Section 5.7 and must be operated via an intrinsically safe circuit. The EXL-IM-9182/10-51-11s transmitter from Company Stahl is suitable. The transmitter may only be installed and operated in non-hazardous areas.

Proof of intrinsic safety for simple circuits in use with EXL-IM-9182-10-51-11s

$U_o \leq U_i$	$6.5 \text{ V} \leq 30 \text{ V}$
$I_o \leq I_i$	$19.7 \text{ mA} \leq 50 \text{ mA}$
$P_o \leq P_i$	$32 \text{ mW} \leq 100 \text{ mW}$
$C_o \geq C_i + C_{\text{Cable}}$	$C_i = 0 \text{ }\mu\text{F}$
$L_o \geq L_i + L_{\text{Cable}}$	$L_i = 0 \text{ }\mu\text{H}$
$C_{\text{Cable}}, L_{\text{Cable}}$: see the specifications of the cable manufacturer	
C_o, L_o : see the documentation for the transmitter according to the gas group	

Test	Result
IP protection	The device meets at least IP65
Inspection of metallic housing parts	Magnesium, titanium and zirconium content < 7.5%
Checking plastic	Suitable in the used ambient temperature range -30 °C ... +60 °C
Electrostatics	Can be used without restriction in groups IIA and IIB, for group IIC the warning "Wipe only with a damp cloth" applies
Locks and latches	Not to comply with special conditions, not relevant
Grounding (potential equalisation)	Double insulation, no PE, PA necessary
Cable and cable entries	The cables must be protected from mechanical and thermal stress, after installation, min. IP65 must be fulfilled
Temperature testing	Together with the EXL-IM transmitter-9182-10-51-11s, a temperature increase of <5 K was measured in the event of an error; operating temperature range: -30 °C ... +60 °C

Overall rating/additional comments

The TFT-2G3D room temperature sensor can be used in conjunction with the EXL-IM-9182-10-51-11s transmitter from Company Stahl in zones 1 and 2. The information in the data sheet or the operating instructions must be observed. The warnings regarding electrostatic charging must also be observed. After installation, at least the protection class IP65 must be guaranteed.



Langenzenn, 01. Sept. 2024
Wen Liu
Explosion Protection Officer

SCHISCHEK
A rotork® Brand

Contact us now

mail@rotork.com
www.rotork.com

rotork®

PUB113-435-00
Issue 03/25