
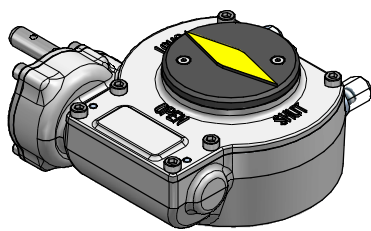
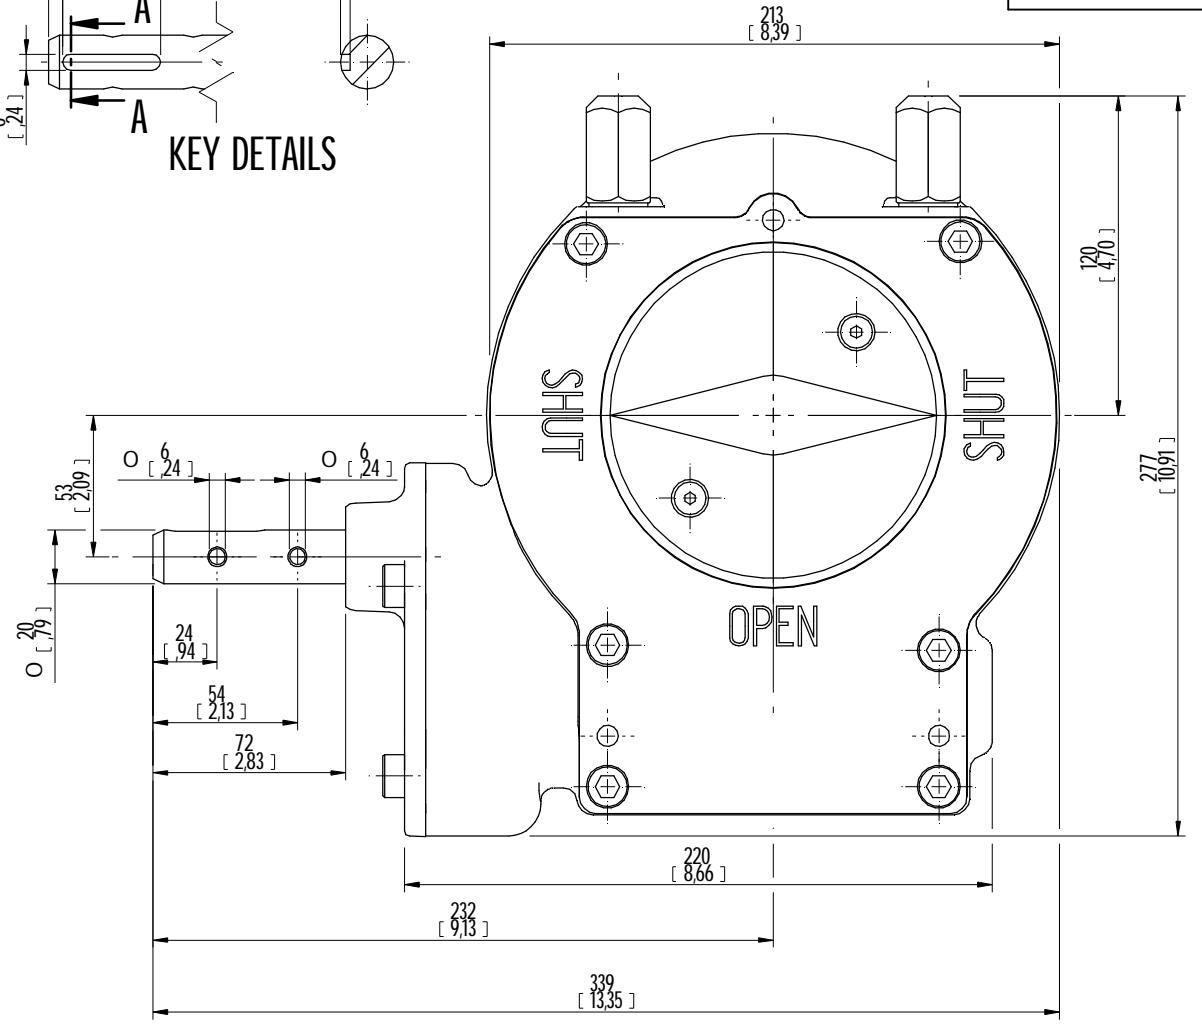
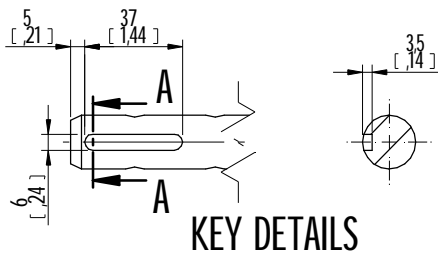
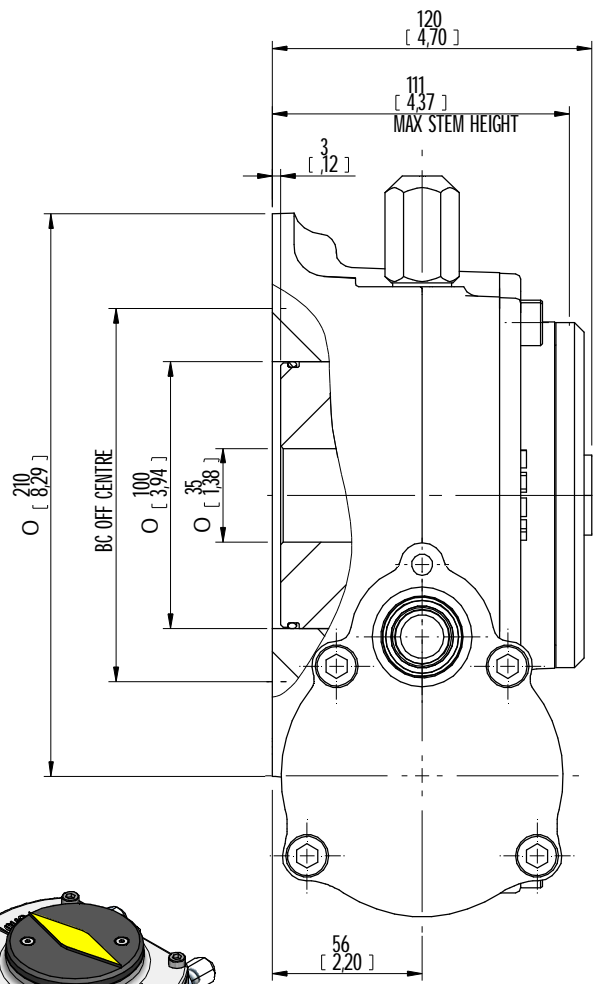


DESCRIPTION				MOUNTING HOLES - BOLT CIRCLE (OFF CENTRES)			BORE: STEM ACCEPTANCE WITH KEYWAY IN ACCORDING WITH STANDARD			TORQUE			
RATIO	TURNS TO CLOSE	TRAVEL (1/4 TURN)	WEIGHT	NR OF HOLES	MIN PCD - ØHOLE	MAX PCD + ØHOLE	ACCORDING TO ISO 5211 / MSS SP-101	MIN	MAX	STANDARD	OUTPUT	INPUT	MA
109:1	27	-5° TO 95°	24 kg	4	Ø104 mm	Ø195 mm	F12 - F14 - F16	Ø35 mm	Ø80 mm	ISO 773 A	4500 Nm	136 Nm	33 ± 15%
				8	N.A.	N.A.	N.A.						
			52 lbs	4	Ø4.09 inch	Ø7.67 inch	FA12 - FA14 - FA16	Ø1.38 inch	Ø2.76 inch	ANSI B17.1	39,828 lbf.in	1204 lbf.in	
				8	N.A.	N.A.	N.A.						

AS PART OF CONTINUOUS PRODUCT DEVELOPMENT, ALL DETAILS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE. FOR UP TO DATE DETAILS PLEASE VISIT [www.rotork.com](http://www.rotork.com)



ISOMETRIC VIEW  
1:5

Rev	CN	Revised	Approved	Date	DD-MMM-YYYY	FIRST ISSUE	Change Description
00						FIRST ISSUE	

 LOSSER - NETHERLANDS <a href="http://www.rotork.com">www.rotork.com</a>	Document type <b>DETAIL DRAWING</b>		Title <b>AB2000</b> <b>AB2000 G-TYPE ASSEMBLY F16 BASE, RH PROJECTION</b>	
	Dimensions in mm Scale 1:2		Drawing Number <b>AB2000G RH</b>	
Created	M R	6-12-2012		Rev A
Checked	P LINE	27-2-2013		
Approved	-	DD-MMM-YYYY		
Sheet 1 of 3		Size A3		

Rev 01