

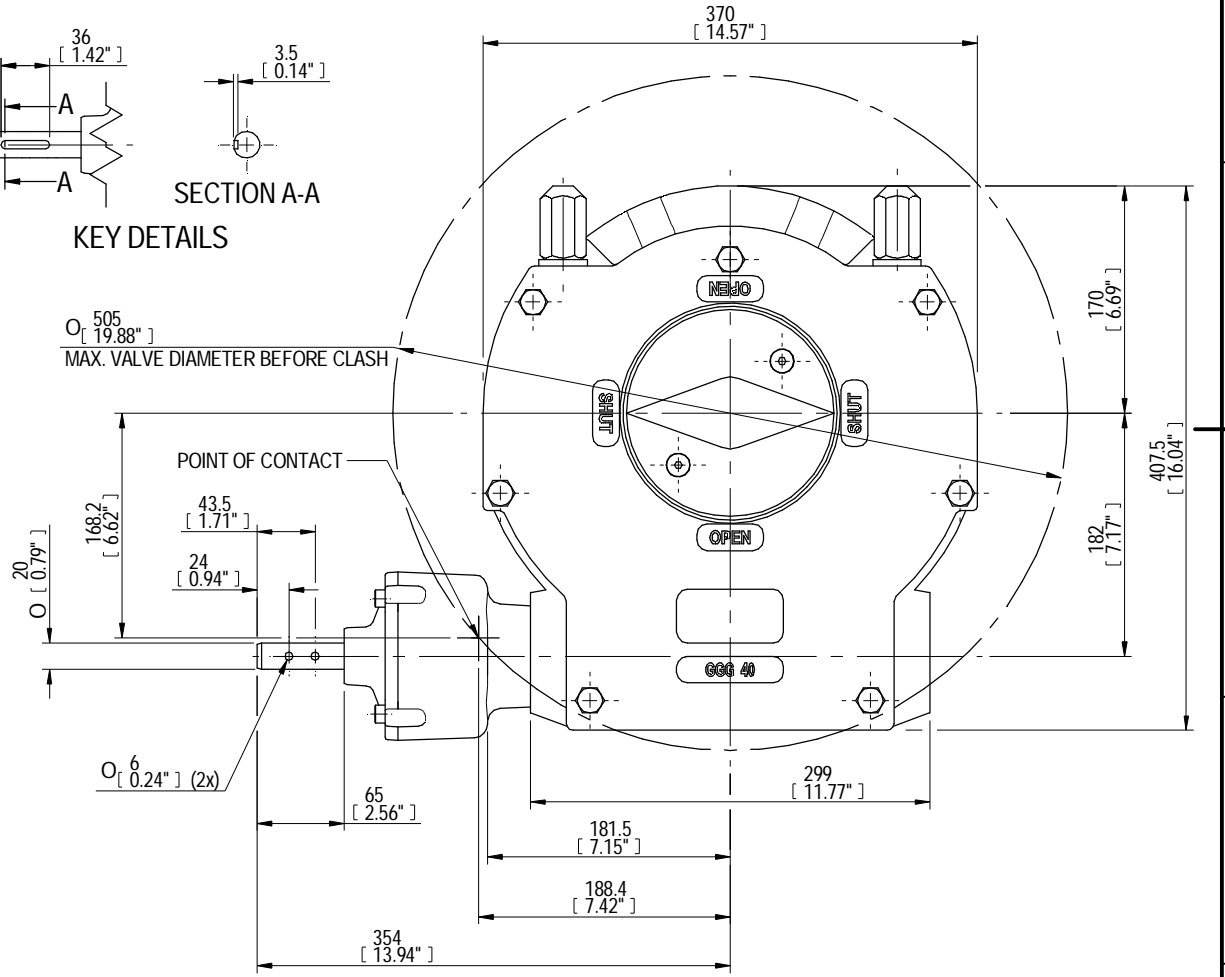
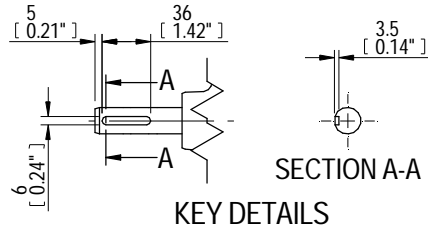
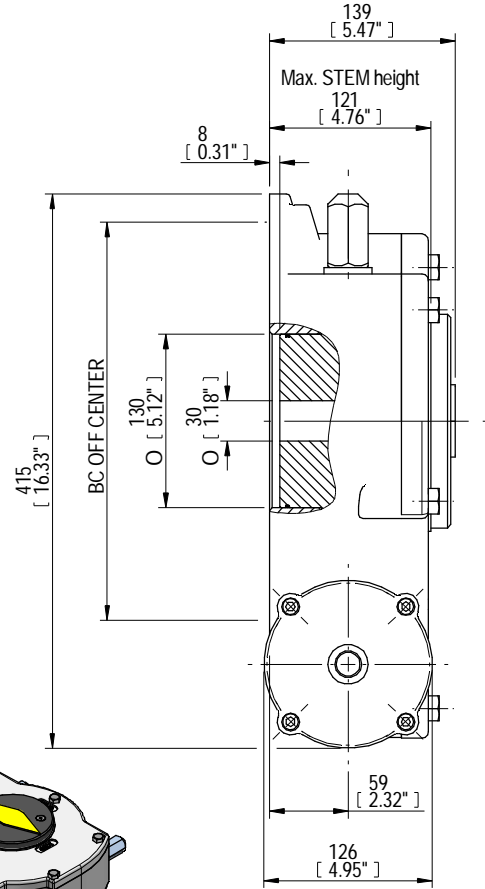


DESCRIPTION				MOUNTING HOLES - BOLT CIRCLE (OFF CENTRES)			BORE; STEM ACCEPTANCE WITH KEYWAY IN ACCORDING WITH STANDARD			TORQUE			
RATIO	URNS TO CLOSE	TRAVEL (1/4 TURN)	WEIGHT	NR of HOLES	MIN ENVELOP PCD - ØHOLE	MAX ENVELOP PCD + ØHOLE	ACCORDING TO ISO 5211 / MSS SP-101	MIN	MAX	STANDARD	OUTPUT	INPUT	MA
468:1	117.0	-5° TO 95°	64.2 kg	4	Ø134 mm	Ø335 mm	F16	Ø30 mm	Ø100 mm	DIN 6885-1	17000 Nm	121 Nm	140 ± 15%
				8	Ø134 mm	Ø335 mm	F25 - F30						
			142 lbs	4	Ø5.28 inch	Ø13.19 inch	FA16	Ø1.18 inch	Ø3.94 inch	ANSI B17.1	150620 lbf.in	1075 lbf.in	
				8	Ø5.28 inch	Ø13.19 inch	FA25 - FA30						



ISOMETRIC VIEW
1:10

AS PART OF CONTINUOUS PRODUCT DEVELOPMENT, ALL DETAILS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE. FOR UP TO DATE DETAILS PLEASE VISIT www.rotork.com

 LOSSER - THE NETHERLANDS www.rotork.com	Document type DETAIL DRAWING		Title AB6800W WITH PR6 RH PLANETARY GEARBOX-PR6	
	Dimensions in mm Scale 1:4		Drawing Number AB6800W-PR6 RH	
	Created K. DANIEL	11/11/2013	Rev A	
	Checked PRABU.D	15/11/2013	Sheet 1 of 1 Size A3	

Rev	CN	Revised	Approved	Date	Change Description
A				15/11/2013	FIRST ISSUE

Rev.01