
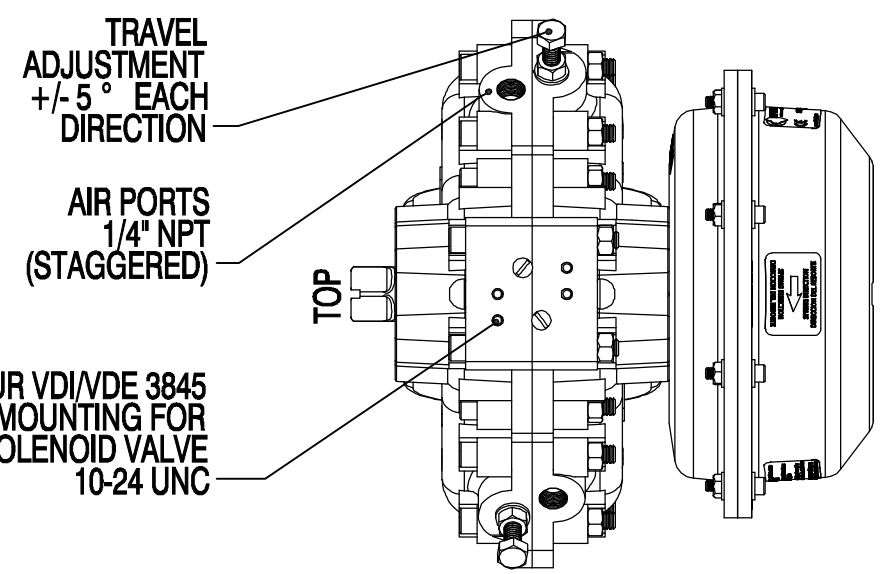


- NOTES:
 1) MAX ALLOWABLE OPERATING PRESSURE (MAOP) = 10 BAR (150 PSIG)
 2) WARNING - SEE K-TORK INSTALLATION, OPERATION & MAINTENANCE MANUAL BEFORE MOUNTING, INSTALLING OR SERVICING.
 3) SPECIFY SUPPLY AIR PRESSURE FOR SPRING-RETURN ACTUATORS.
 4) ACTUATOR SHOWN IN FULL CW POSITION, SCRIBE ON SHAFT SHOWS VANE LOCATION POSITION (SPRING END / AIR START).
 5) SPECIFY SPRING DIRECTION, CW STANDARD.
 6) WEIGHT 12.4 kg (27.32 LB.)

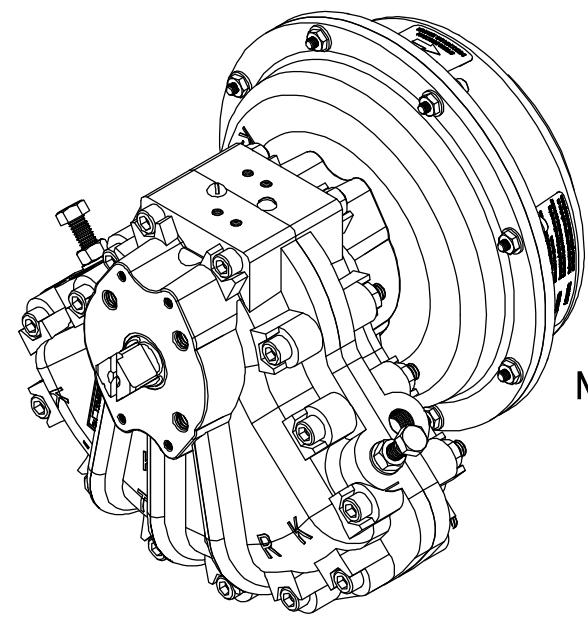


NAMUR VDI/VE 3845 MOUNTING FOR SOLENOID VALVE 10-24 UNC

TRAVEL ADJUSTMENT +/- 5° EACH DIRECTION

AIR PORTS 1/4" NPT (STAGGERED)

TOP
BOTTOM


(4 PLACES) ISO 5211 MOUNTING BASE F10, M10 x 1.5 TAPPED 16.51 (.65in) DEEP, 102mm (4.02in) BOLT CIRCLE STRADDLE ϕ

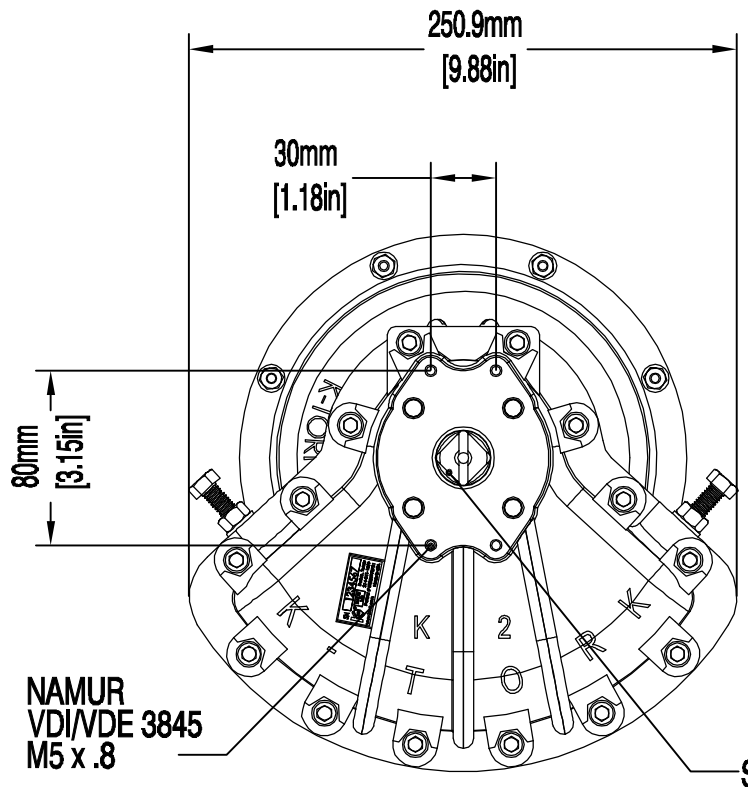

TOP

NAMUR VDI/VE 3845 M5 x .8


SEE NOTE: 4

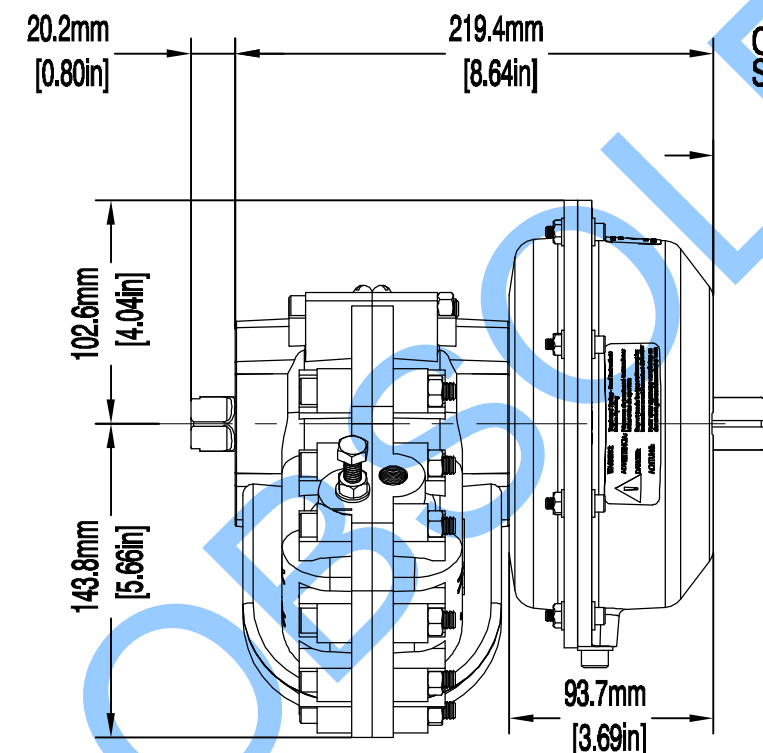

SIDE VIEW


OPTIONAL MALE SHAFT ADAPTOR (25.21mm [0.99in])

DOUBLE SQUARE 38.1mm (1.15in) DEEP

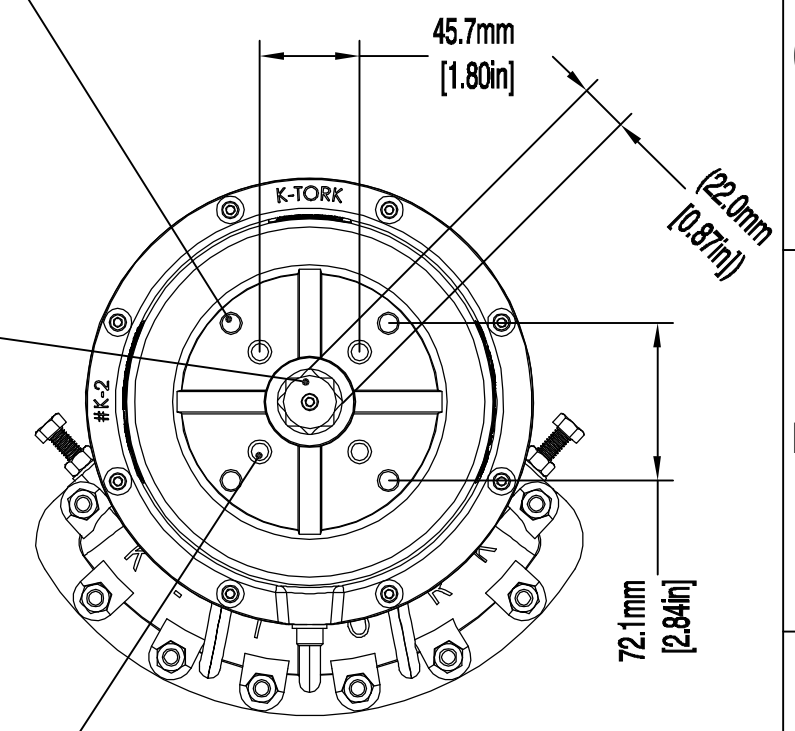

BOTTOM MOUNTING VIEW

(4 PLACES) 3/8-16 UNC-2B TAPPED 19.05mm (.75in) DEEP, 64.77mm (2.55in) BOLT CIRCLE STRADDLE ϕ

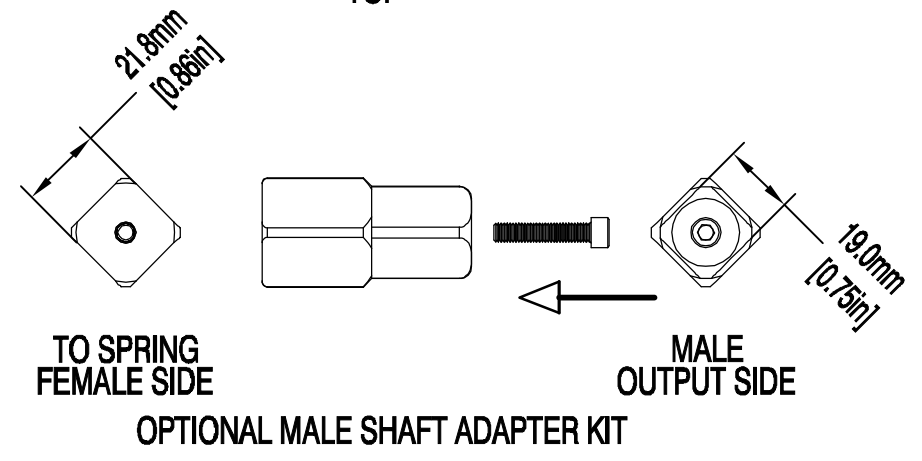

TO SPRING FEMALE SIDE

MALE OUTPUT SIDE

OPTIONAL MALE SHAFT ADAPTER KIT



This drawing is confidential and is the property of Rotork Dallas Inc. and must not be reproduced either wholly or partly. All rights in respect of patents, designs and copyrights are reserved. © 2015

Document type	DETAIL DRAWING	
	Dimensions in mm	
	Scale 1:1	
Created	S.DINESH	30-JAN-2015
Checked	S.SUDHIR	30-JAN-2015
Approved	K.PRICE	30-JAN-2015

Title		K-2-SPRING RETURN - MODEL IMPERIAL AIR PORTS & MOUNTING HOLES	
Drawing Number		D000000211	
Sheet	1	of	1
Size	A3		