


FLANGE TYPE acc. ISO 5211		
TYPE	KEY	A
F10	6x6 [0.24x0.24]	Ø20 [0.79]

**DESCRIPTION:**  
 TRAVEL : -5° TO 95° adjustable  
 RATIO : 729 : 1  
 TURNS TO CLOSE : 182.25  
 WEIGHT : 219.4kg. (482.7 lb.) Excl. handwheel

**MOUNTING HOLES :**  
 BOLT CIRCLE : min. Ø 254 [10.00]  
 (OFF CENTER) max. Ø 406 [15.98]  
 acc. ISO 5211 : F25-F30-F35-F40  
 MIN. bore Quadrant : Ø 75 [2.95]  
 MAX. bore Quadrant :  $\nabla$ 115 [4.53] or Ø 160 [6.30]

**TORQUE :**  
 max. OUTPUT : 32000 Nm (283224 lbf.in.)  
 max. INPUT : 142 Nm (1259 lbf.in.)  
 MA : 225.0 ± 15%

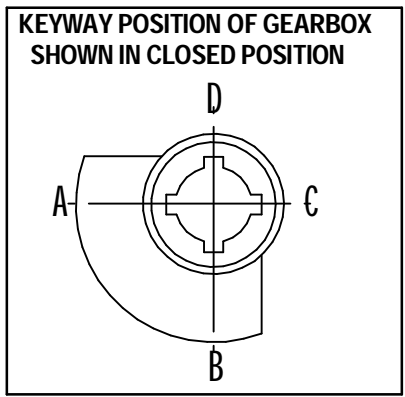

DIMENSIONS IN MM [INCH]

**ROTORK GEARS**

**GEARBOX E250G-PR10**

DRAWN: Robbin Goosen CHECKED: Henk Hoff  
 DWG: E250G-PR10 REV: 01