

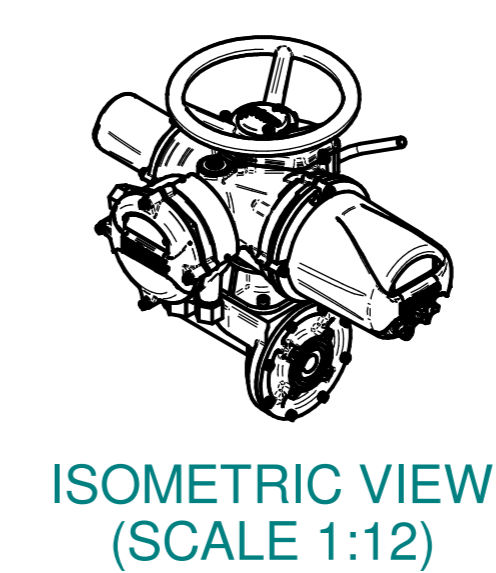
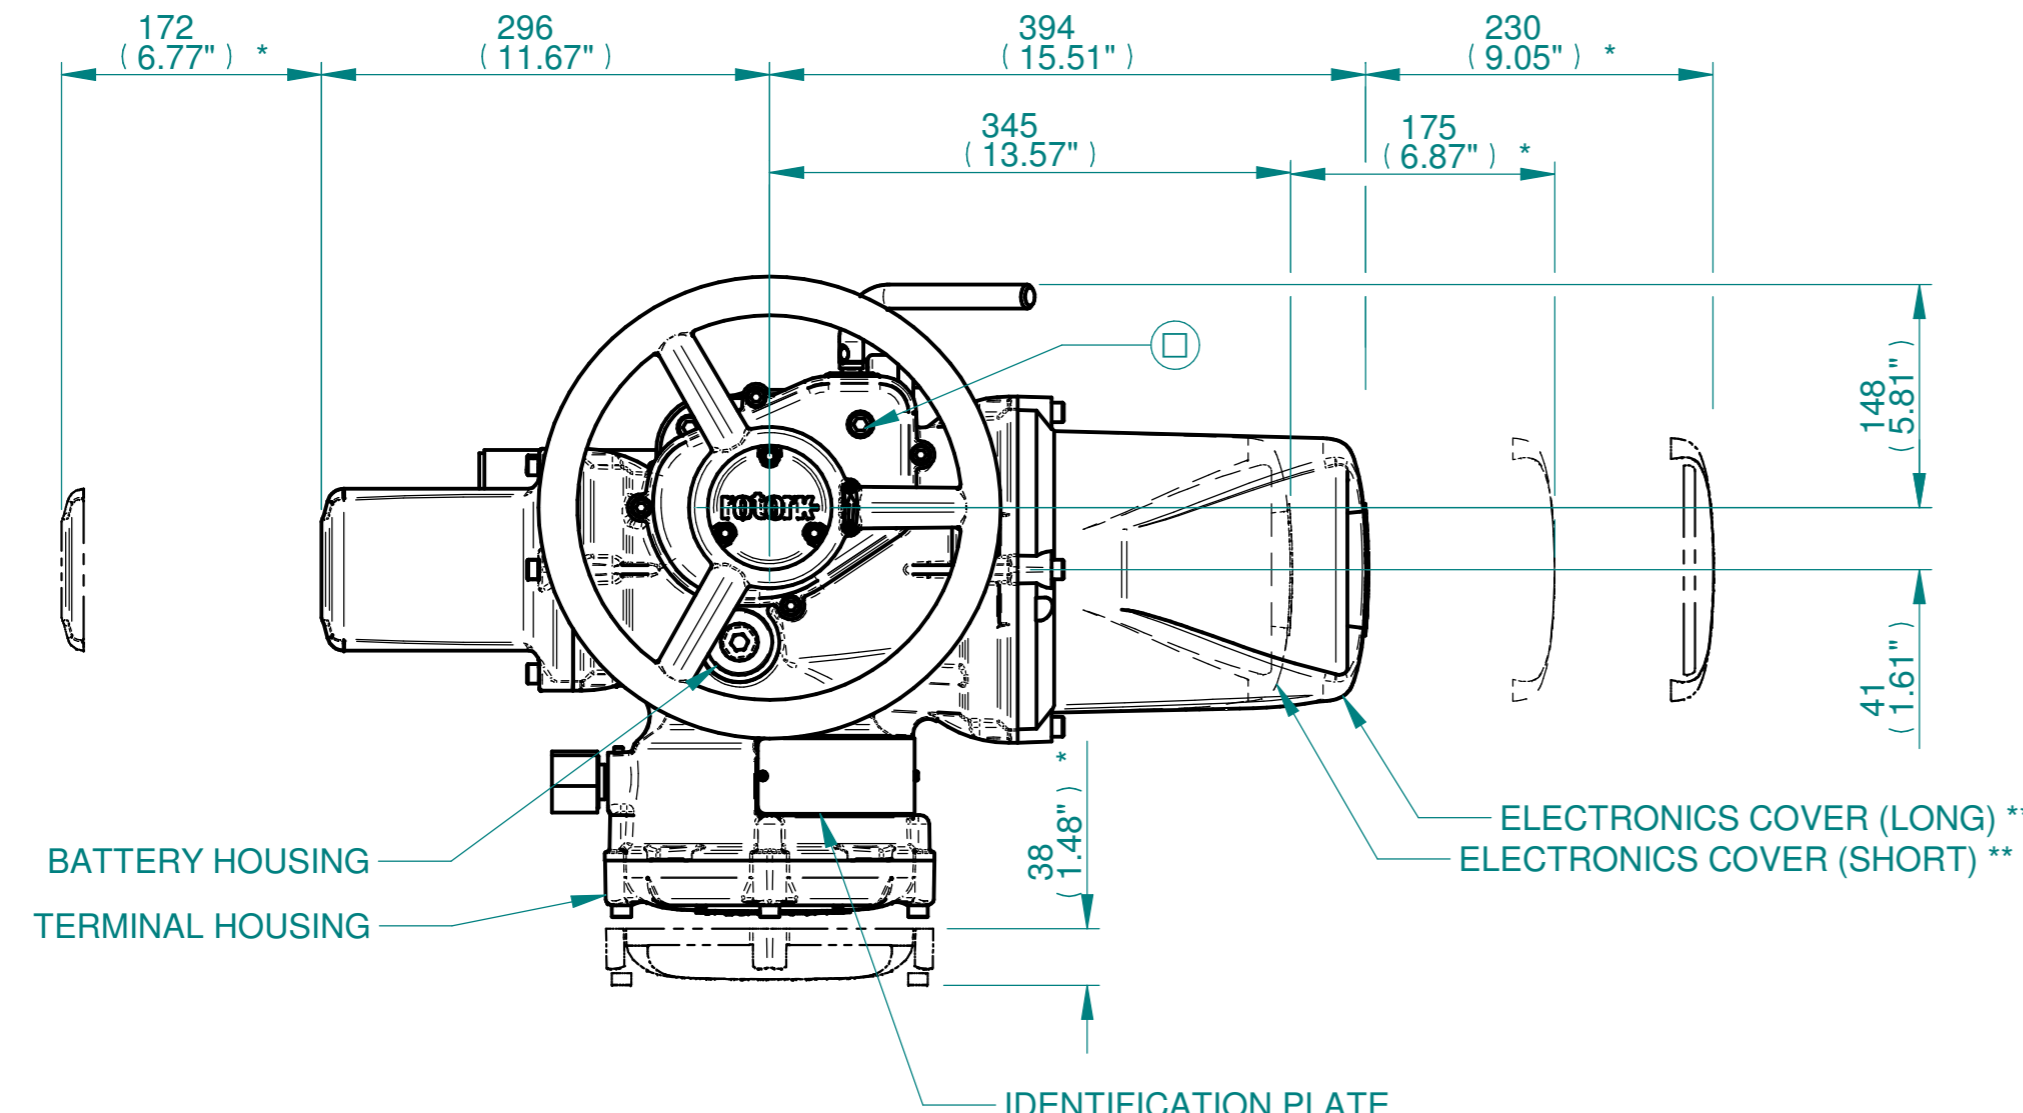
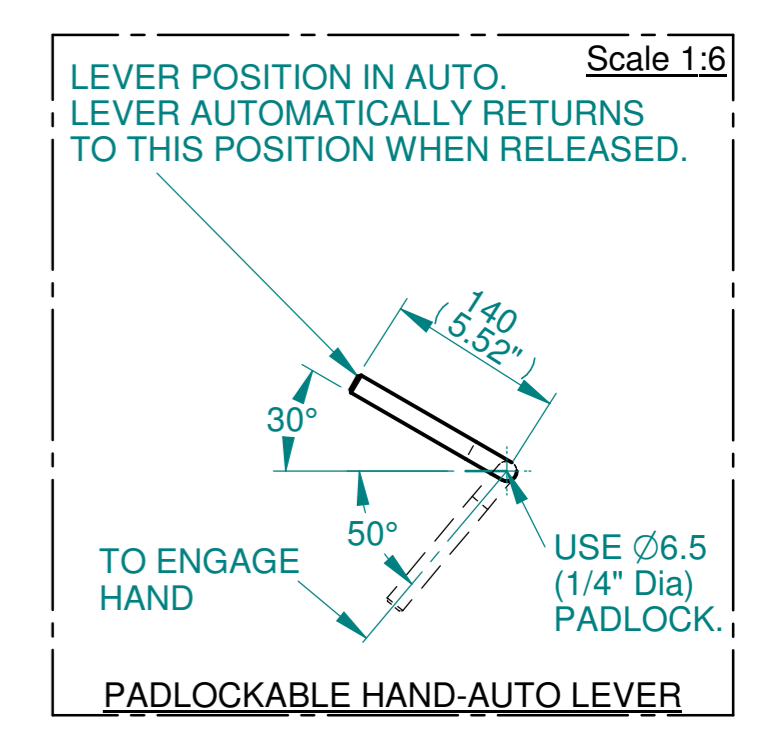
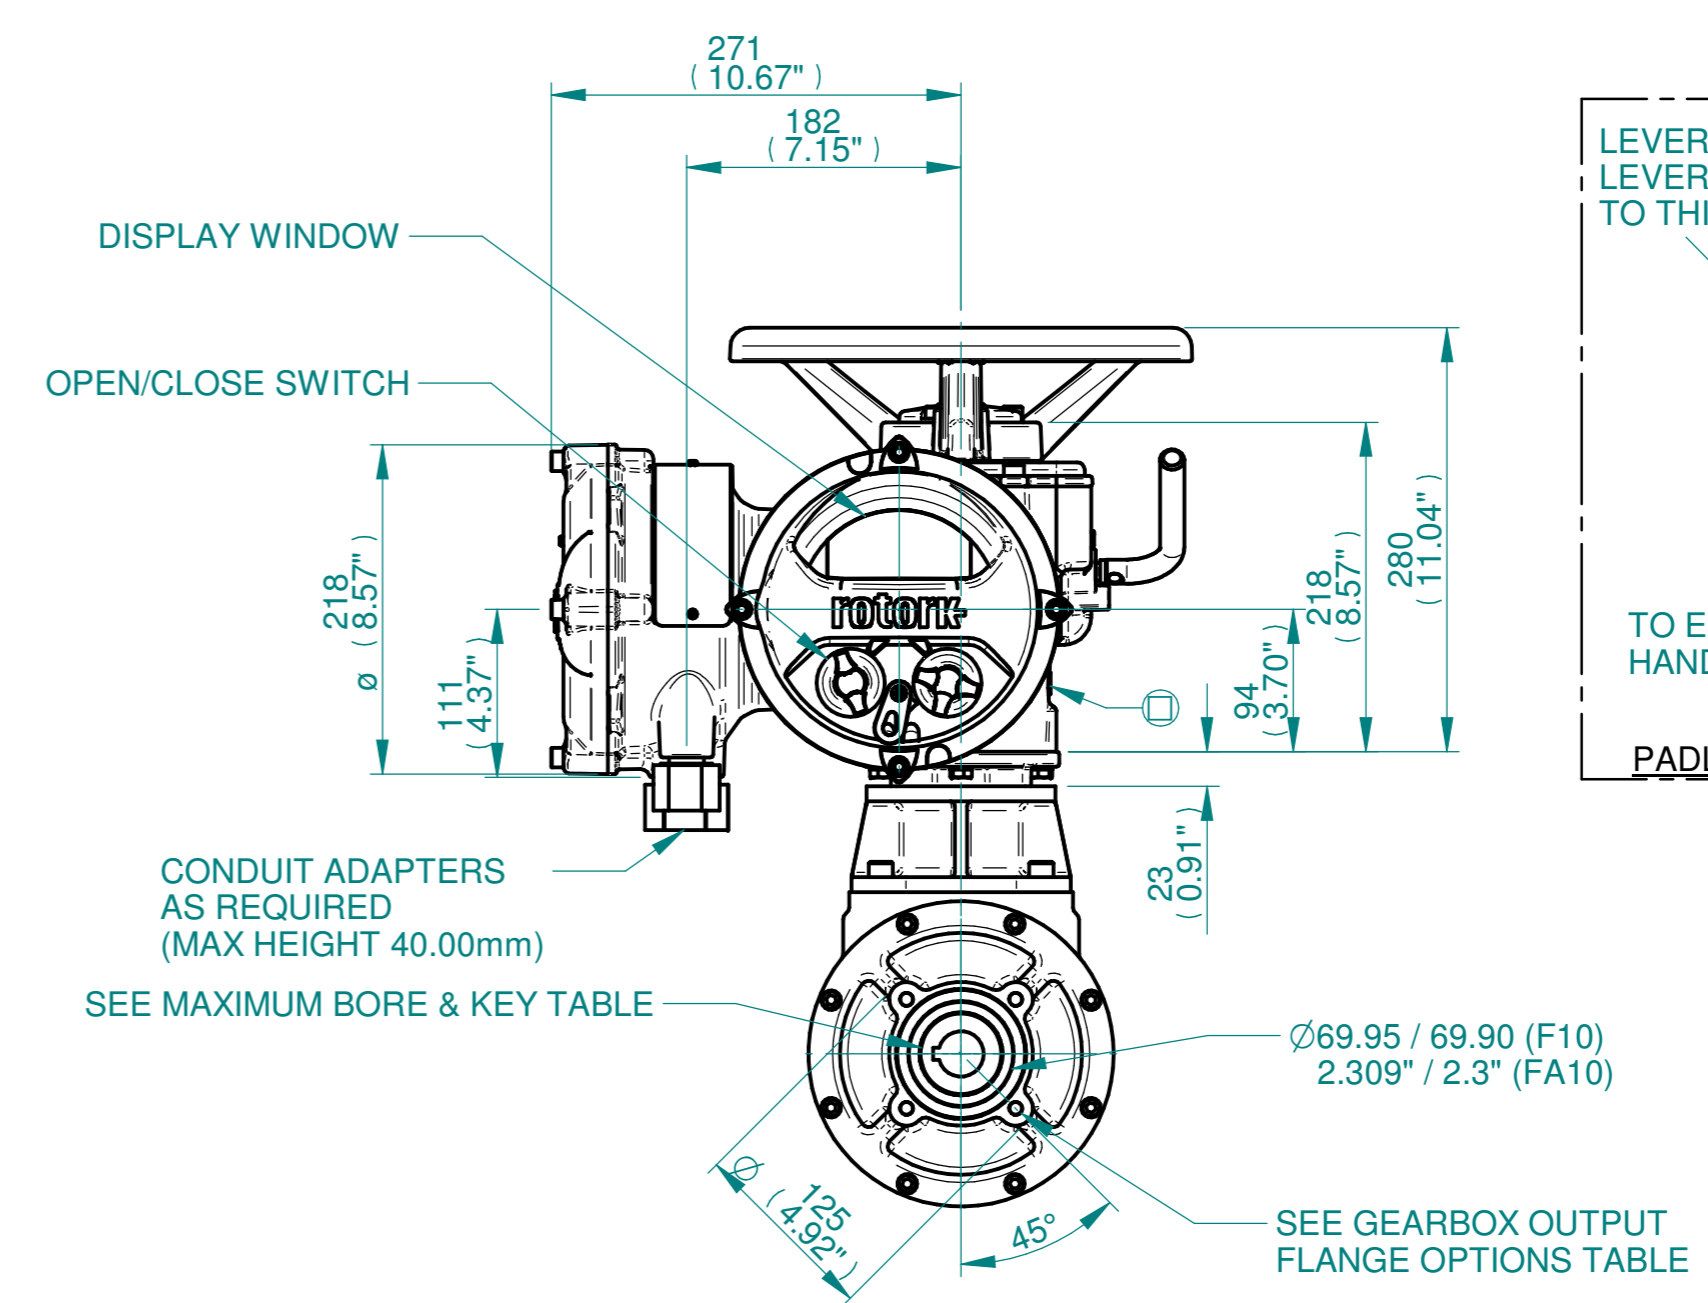


H  
G  
F  
E  
D  
C  
B  
A

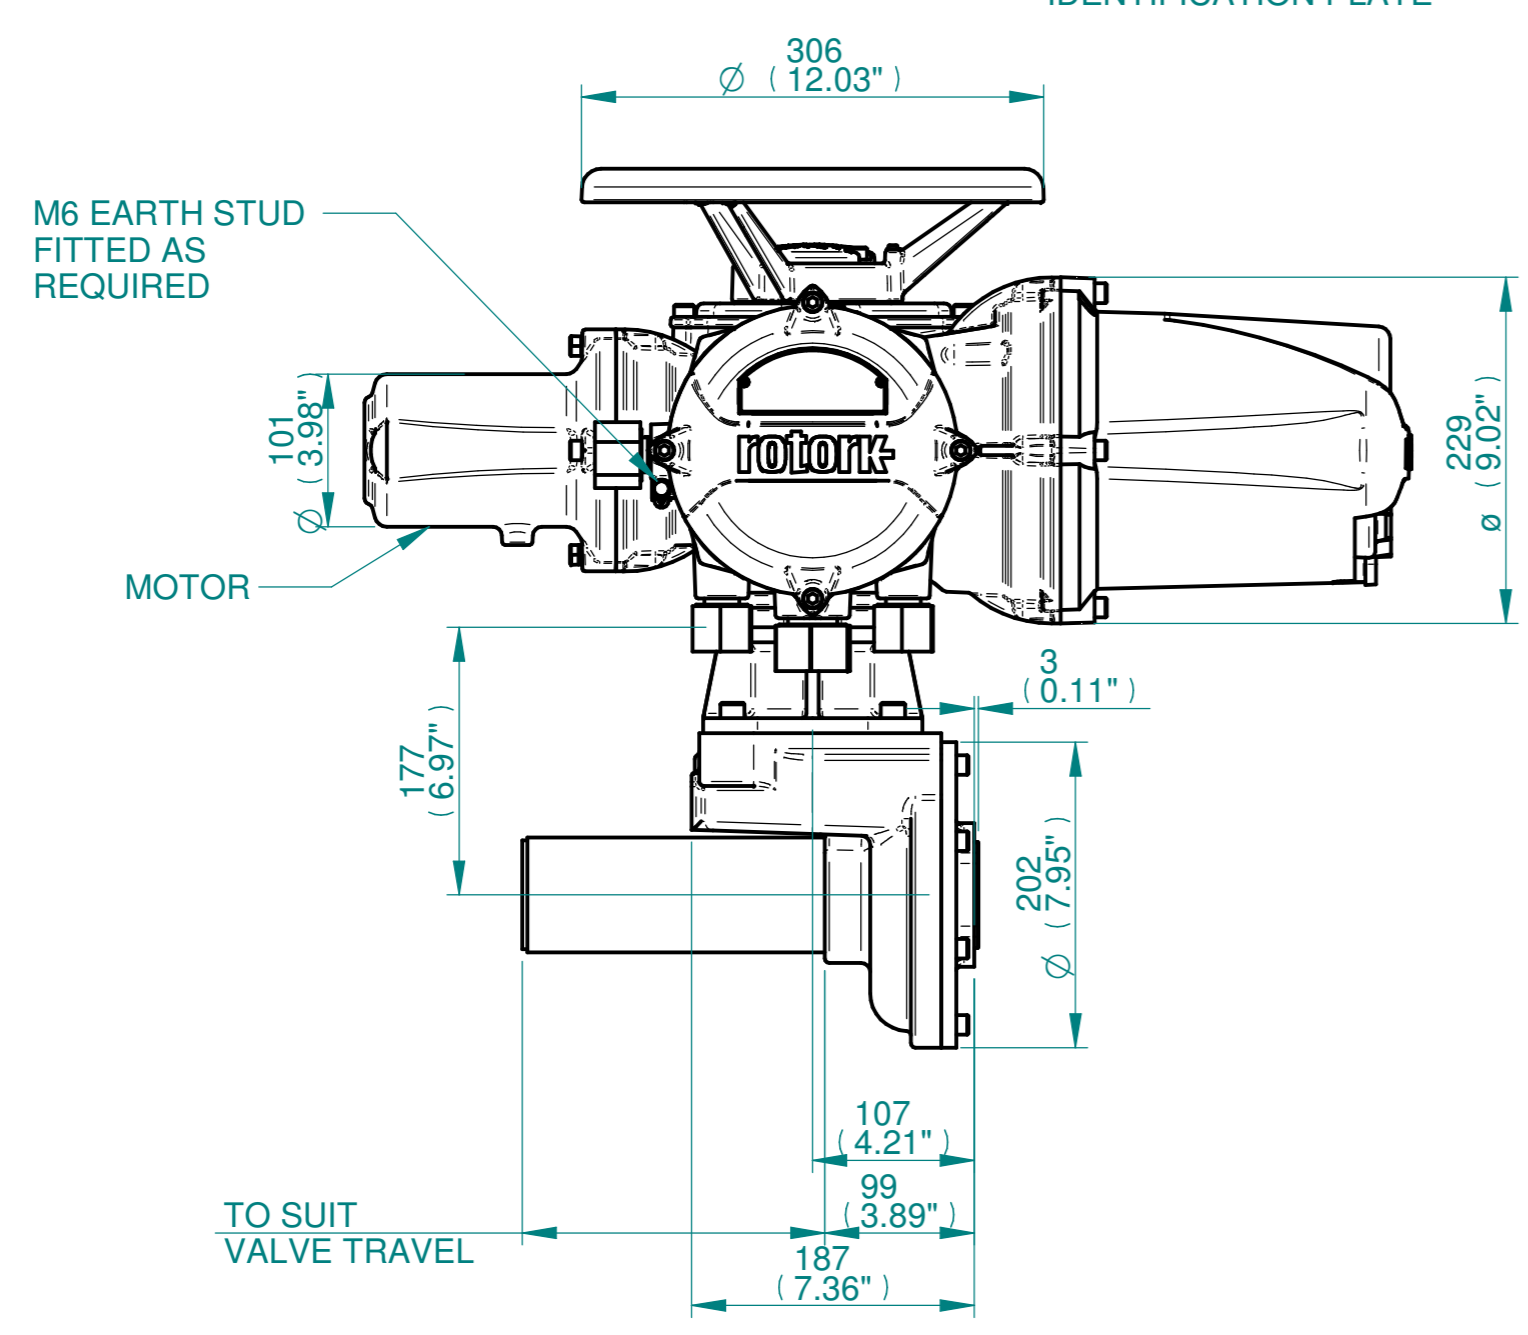

**NOTES:**  
 :DIMENSIONS WITH "\*" INDICATE COVER REMOVAL ALLOWANCE  
 :ELECTRONICS COVER OPTION "\*\*\*\*" WILL VARY DEPENDING ON CONFIGURATION  
 :NETT WEIGHT = 52kg/114lbs  
 : = OIL FILLER/DRAIN PLUG  
 :THE INTERFACE PROVIDED FOR MOUNTING THE ACTUATOR OR SECOND STAGE GEARBOX ONTO THE VALVE SHOULD CONFORM TO GOOD ENGINEERING PRACTICES, ENSURING ADEQUATELY TOLERANCED LIMITS FOR PARALLELISM, PERPENDICULARITY AND CONCENTRICITY.  
 :ROTORK CANNOT BE HELD LIABLE FOR DAMAGE TO OUR EQUIPMENT CAUSED BY EXCESSIVE LOADING FROM COVER TUBES. (SEE ALSO PUB000-124)

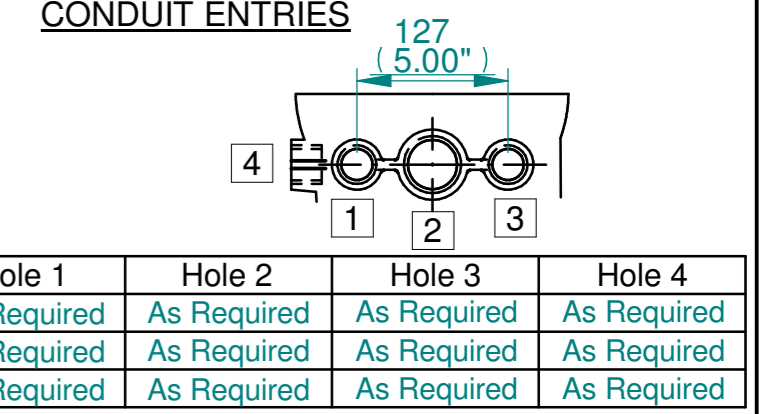

**rotork**  
 www.rotork.com  
 Rotork Controls Limited  
 Bath, BA1 3JQ, England.  
 Telephone 01225-733200

Actuator Size: IQ10/12/18, IB2, F10/FA10		Gearbox output flange options								Maximum Bore & Key			
Title IQ10/12/18, TOP HANDWHEEL, IB2, F10/FA10, Ratio 1:1 Installation Details	Designation	F10	-	-	-	-	FA10	-	-	-	Key form	Ø Bore	Key size
	No. Holes	4	-	-	-	-	4	-	-	-	Rectangle (BS4235)	40	12 X 8
	Hole size	M10	-	-	-	-	3/8" UNC	-	-	-	Rectangle (ANSI B17.1)	1-5/8"	3/8 X 1/4"
	PCD	102	-	-	-	-	4"	-	-	-	Square (ANSI B17.1)	1-1/2"	3/8"
Drawn JLF	Checked NJC	Date 11-MAR-15											
Ref SALES	Project Ref QUOTATION												

Issue	Description
2	4 ENTRY CHANGE
Scale: 1:5	
THIRD ANGLE PROJECTION	
A2	Drawing Number Issue No Sheet No
I11THWIB2STD	2 1 of 1

1 2 3 4 5 6 7 8 9 10 11 12