
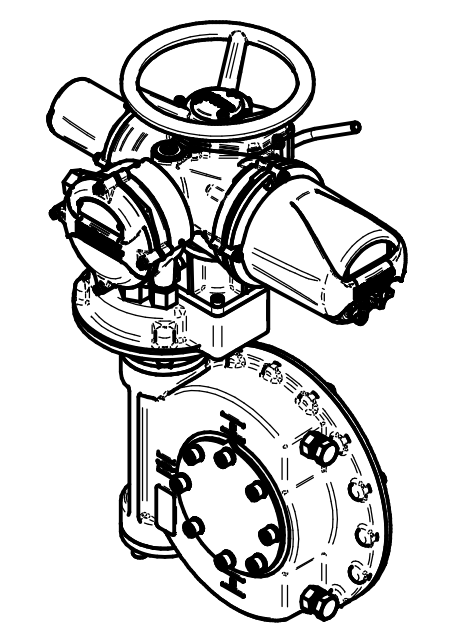



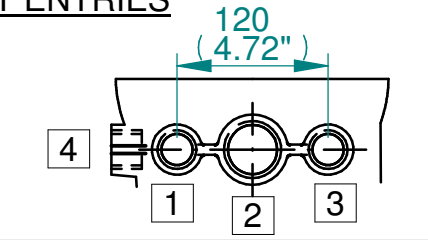
H  
G  
F  
E  
D  
C  
B  
A

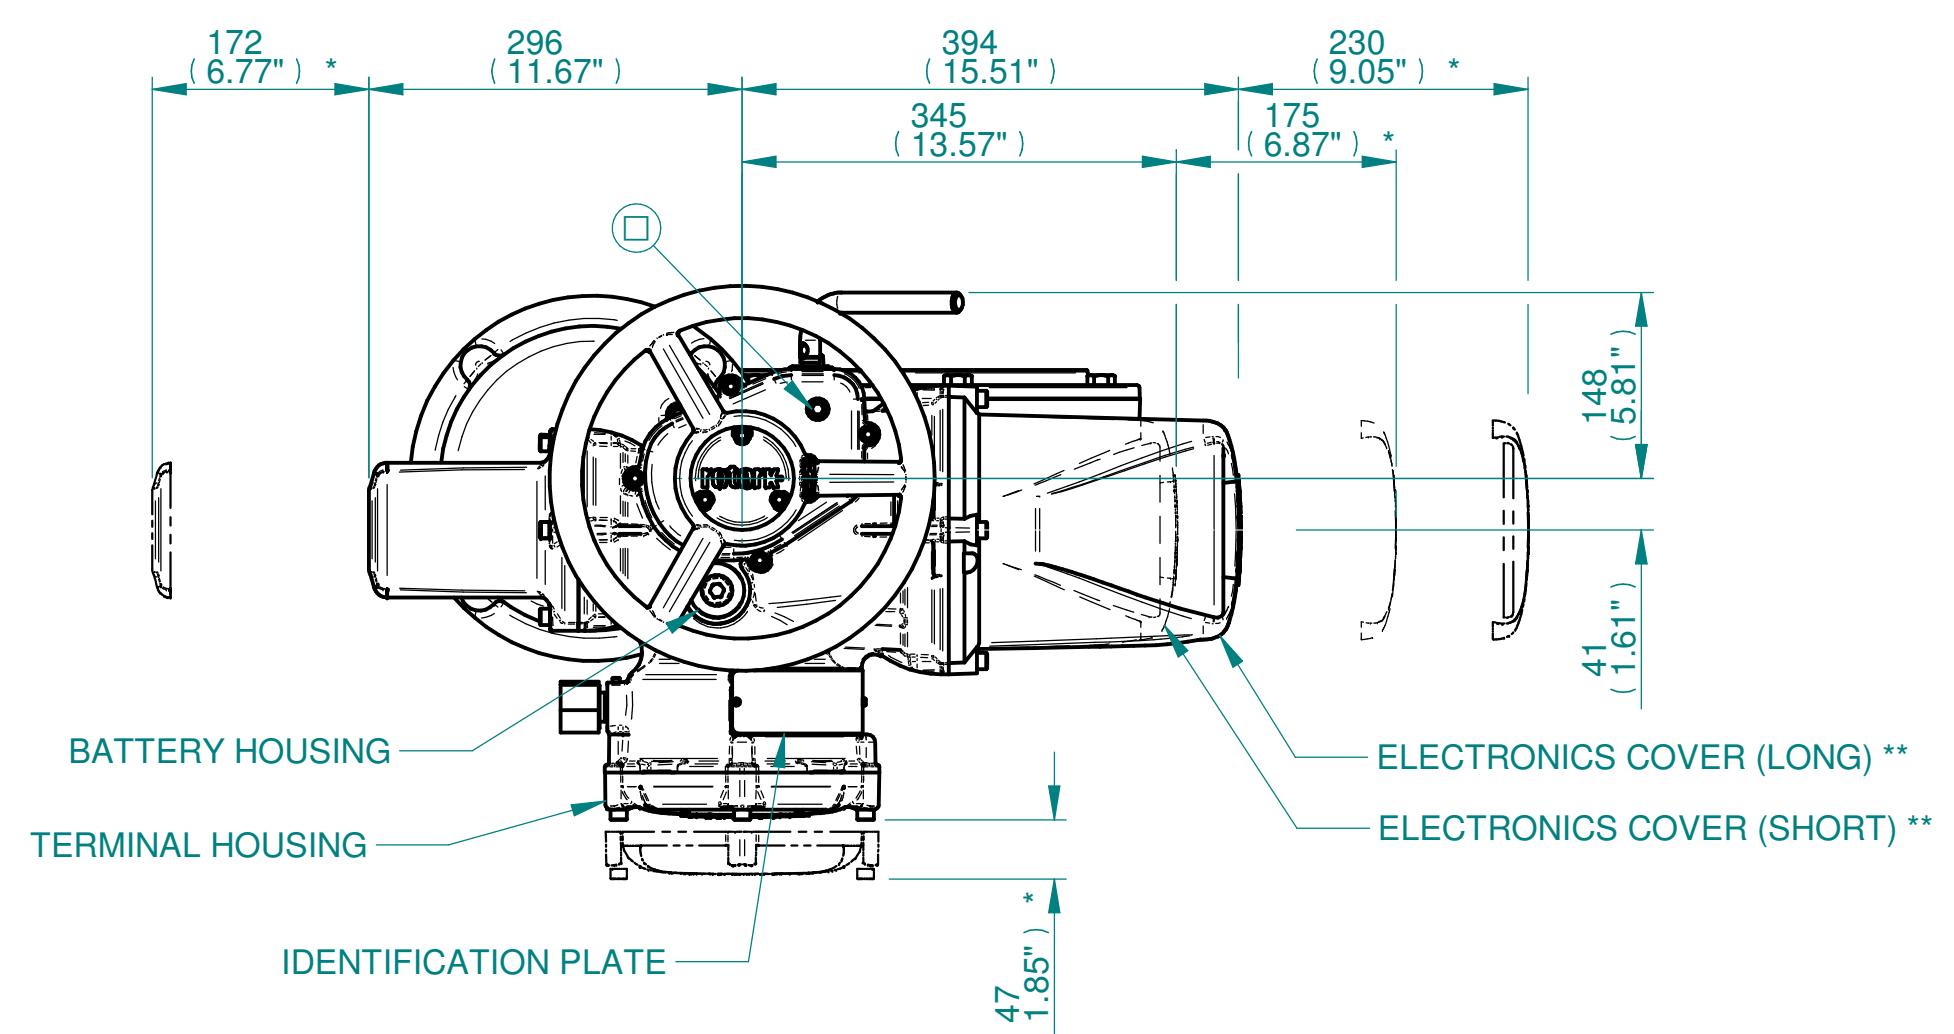





ISOMETRIC VIEW  
(SCALE 1:12)

**NOTES:**  
 :DIMENSIONS WITH \*\*\* INDICATE COVER REMOVAL ALLOWANCE  
 :ELECTRONICS COVER OPTION \*\*\*\* WILL VARY DEPENDING ON CONFIGURATION  
 :NETT WEIGHT = 175kg/386lbs  
 :  = OIL FILLER/DRAIN PLUG  
 :THE INTERFACE PROVIDED FOR MOUNTING THE ACTUATOR OR SECOND STAGE GEARBOX ONTO THE VALVE SHOULD CONFORM TO GOOD ENGINEERING PRACTICES, ENSURING ADEQUATELY TOLERANCED LIMITS FOR PARALLELISM, PERPENDICULARITY AND CONCENTRICITY.  
 :ROTORK CANNOT BE HELD LIABLE FOR DAMAGE TO OUR EQUIPMENT CAUSED BY EXCESSIVE LOADING FROM COVER TUBES. (SEE ALSO PUB000-124)

**CONDUIT ENTRIES**



	Hole 1	Hole 2	Hole 3	Hole 4
Size	As Required	As Required	As Required	As Required
Plugged	As Required	As Required	As Required	As Required
Gland	As Required	As Required	As Required	As Required

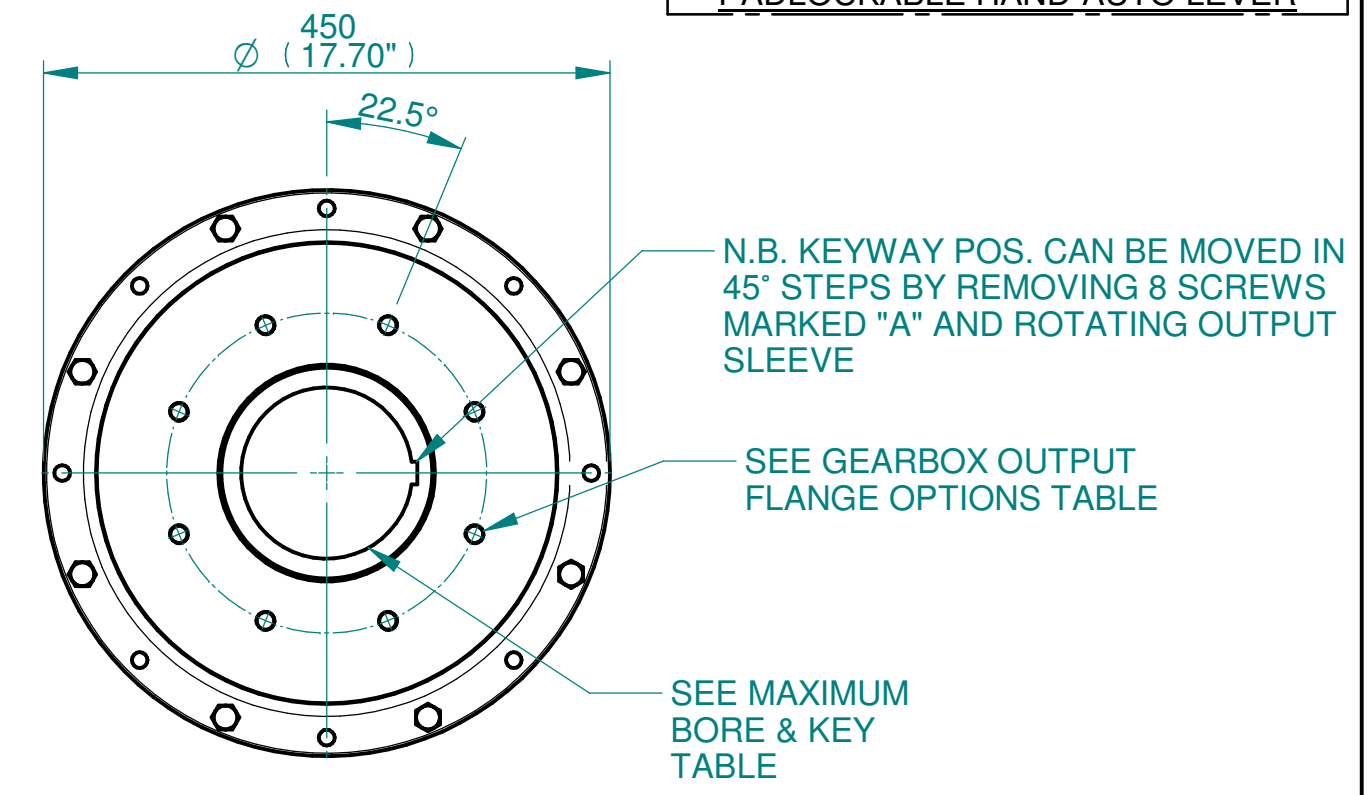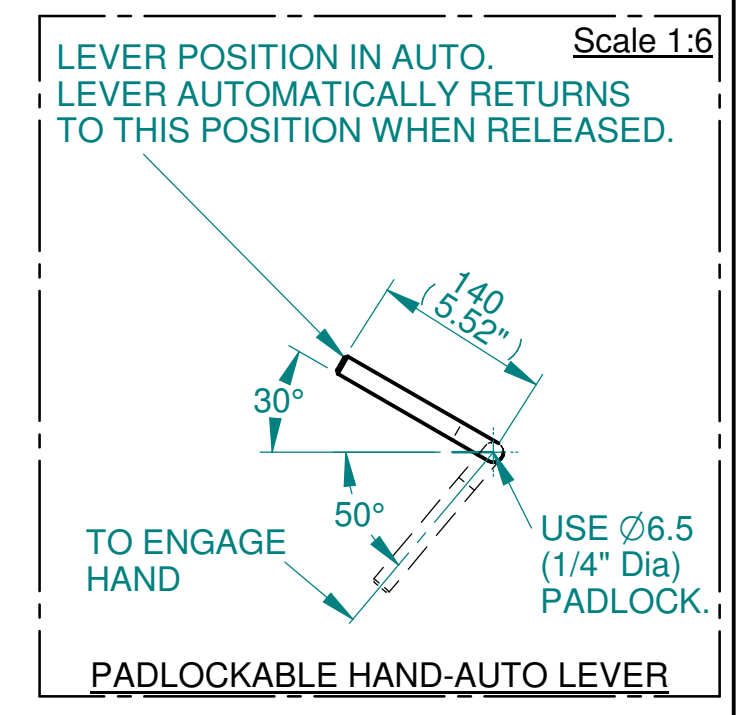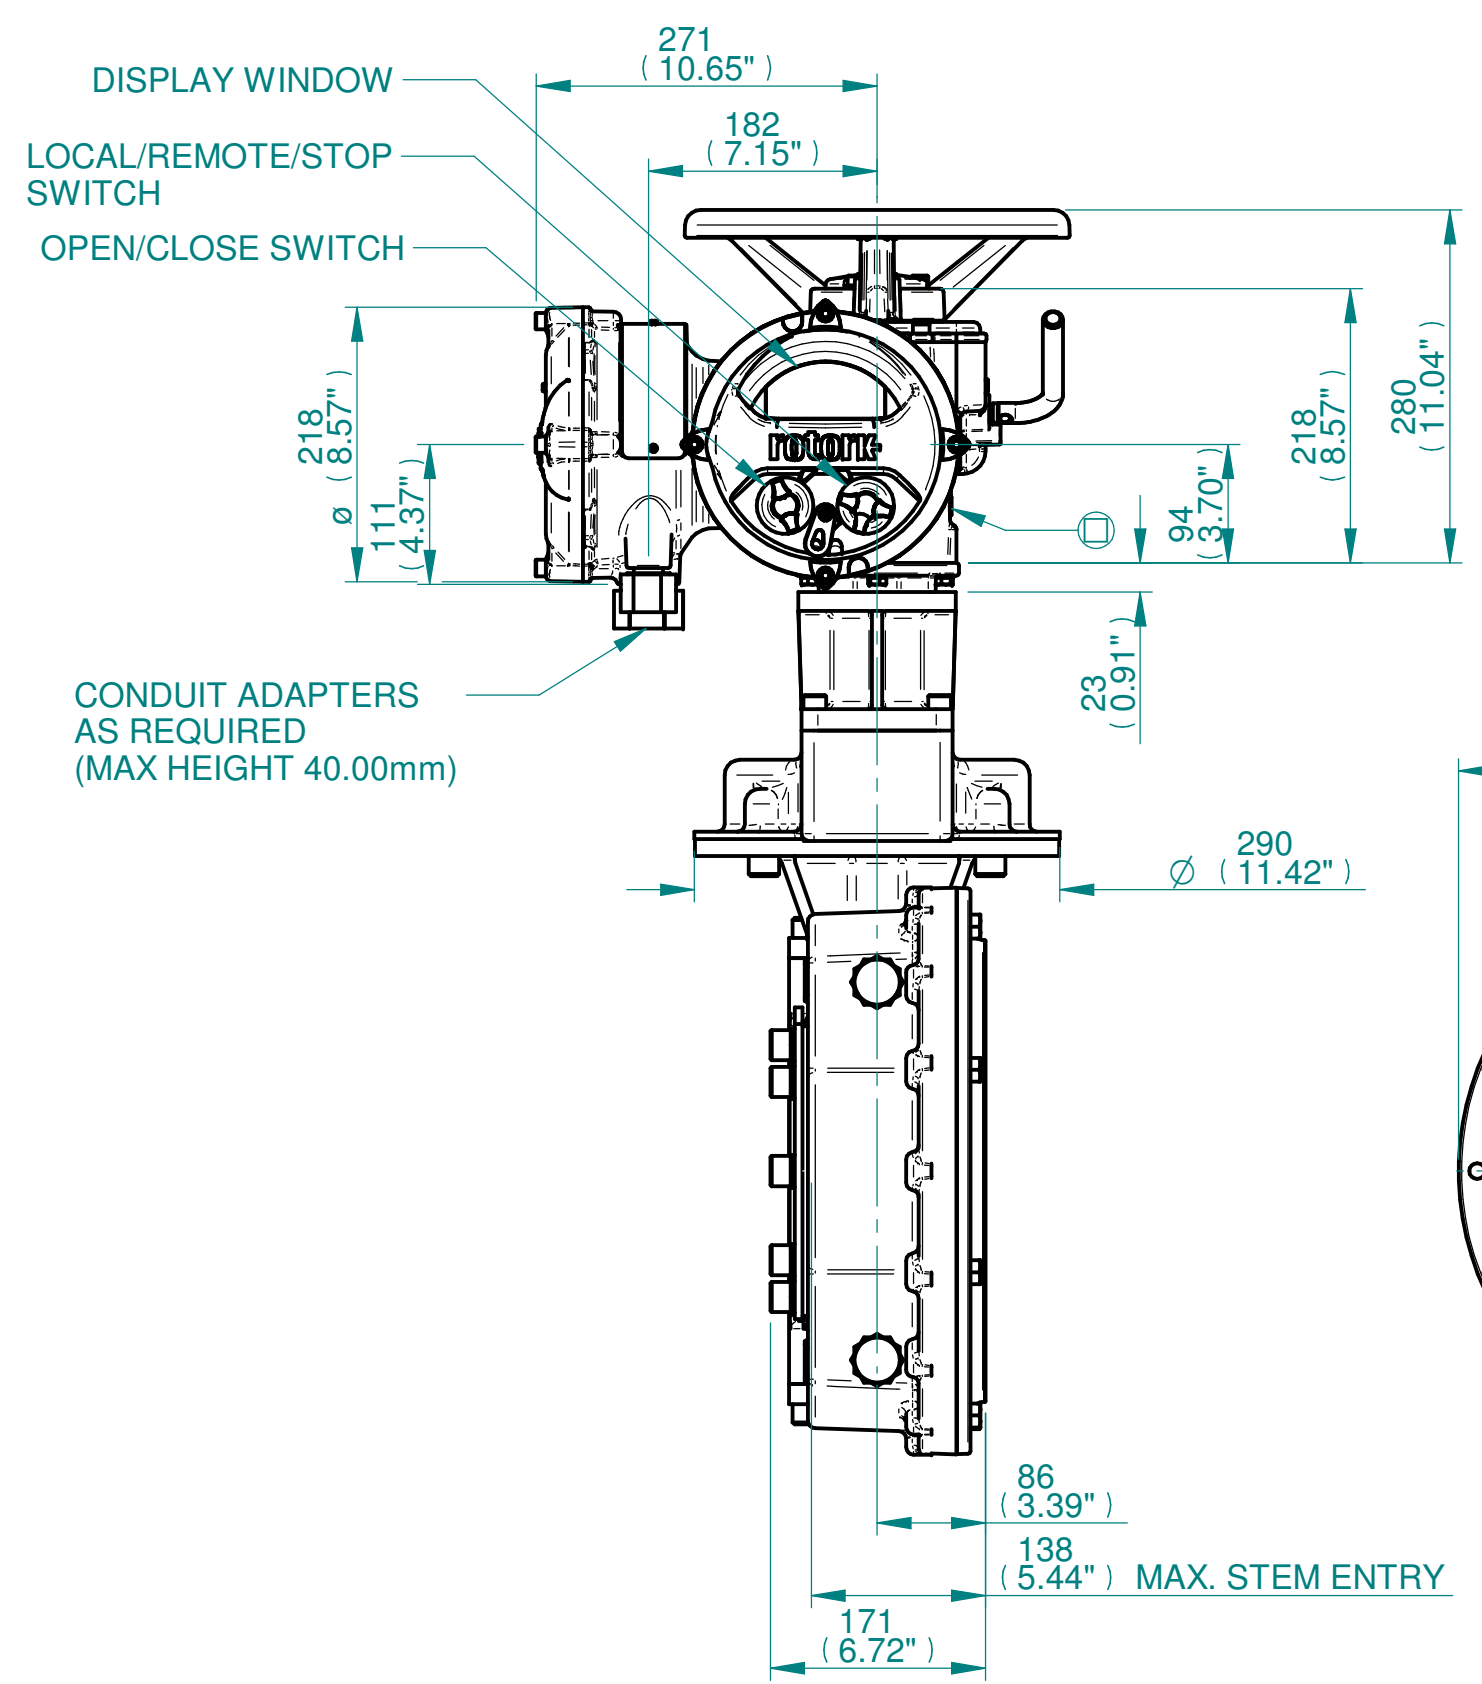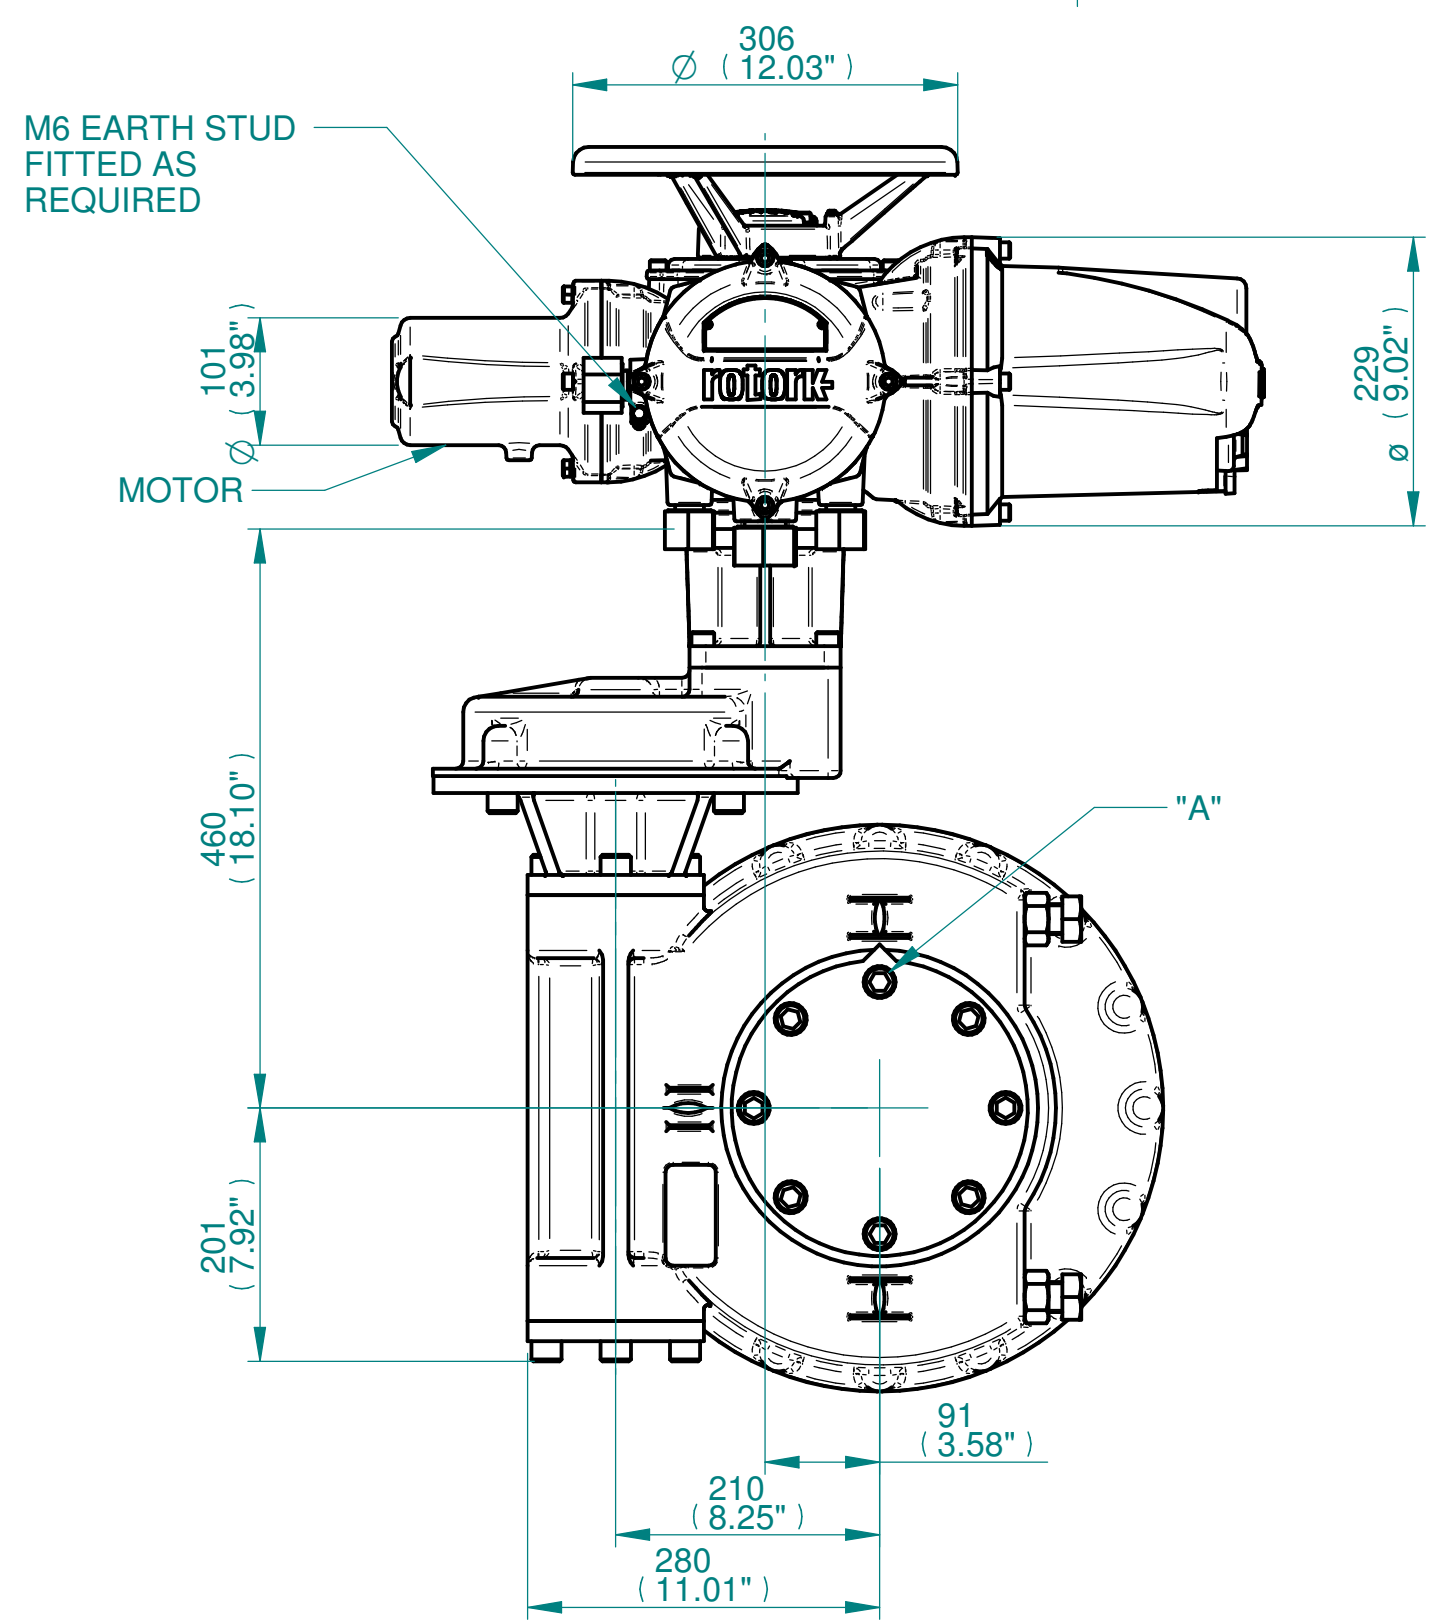

3D Models are available in various formats under the same drawing number

Actuator Size: IQ10/12/18 IW7,72 & 76RL/MOW7RL		Gearbox output flange options								Maximum Bore & Key		
Title IQ10/12/18, TOP HANDWHEEL, IW7RL / IW72RL / IW76RL / MOW7RL, F/FA25 & 30, Ratios 120 - 384:1 Installation Details	Designation	F25	F30	-	-	FA25	FA30	-	-	Key form	Ø Bore	Key size
	No. Holes	8	8	-	-	8	8	-	-	Rectangle (BS4235)	136	36 X 20
	Hole size	M16	M20	-	-	5/8" UNC	3/4" UNC	-	-	Rectangle (ANSI B17.1)	5-1/4"	1-1/4 X 7/8"
	PCD	254	298	-	-	10"	11-3/4"	-	-	Square (ANSI B17.1)	4-7/8"	1-1/4" SQ
Drawn TED	Checked NJC	Date 18-AUG-14										
Ref SALES	Project Ref QUOTATION											

Issue	Description
3	OUTPUT FLANGE CHANGE
Scale: 1:6	
THIRD ANGLE PROJECTION	
A2	Drawing Number Issue No Sheet No
I11THWIW7RLSTD	3 1 of 1

**rotork**  
www.rotork.com  
Rotork Controls Limited  
Bath, BA1 3JQ, England.  
Telephone 01225-733200

1 2 3 4 5 6 7 8 9 10 11 12