


SEE BASEPLATE DETAILS TABLE

1/2" NPT CONDUIT GLAND

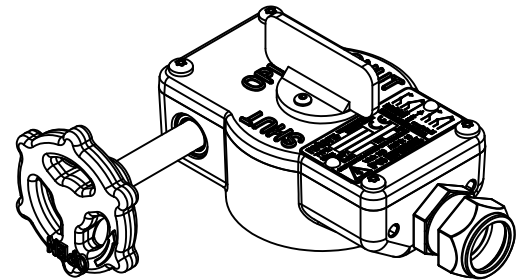

ISOMETRIC
1:2.5

BASEPLATE DETAILS (ALTERNATIVES AVAILABLE ON REQUEST)	
HOLE DETAILS (45° OFF CENTRES)	
ISO F05	4 HOLES M6 X 6 (0.24") DEEP ON Ø50.0 (Ø1.969") P.C.
FA05	4 HOLES 1/4"UNC X 6.35 (0.28") DEEP ON Ø50.8 (Ø2.00") P.C.

MAX BORE RECTANGULAR KEY		
STD	BORE	KEY
BS4235	14.4	5 X 5
BS46	0.567"	0.1875" X 0.1875"
ANSI B17.1	0.625"	0.1875" X 0.125"

MAX SQUARE	
□ 13.9(0.55")	
MAX BORE D-D	
BORE 19.7(0.77") DD13.9(0.55")	



FB10 ISO UL BASELINE
FB10 GEARBOX 75Nm. UL1091 SPECIFICATION. ISO F05.

DETAILS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

FOR UP TO DATE DETAILS VISIT www.rotork.com

DRAWING No	DEV0576	SHEET 3/3	Regina House Ring Road Bramley Leeds LS134ET United Kingdom
ISSUE	D		
DATE	04/01/2010		