


rotork®

Keeping the World Flowing
for Future Generations

General Purpose Field Control Unit Brochure

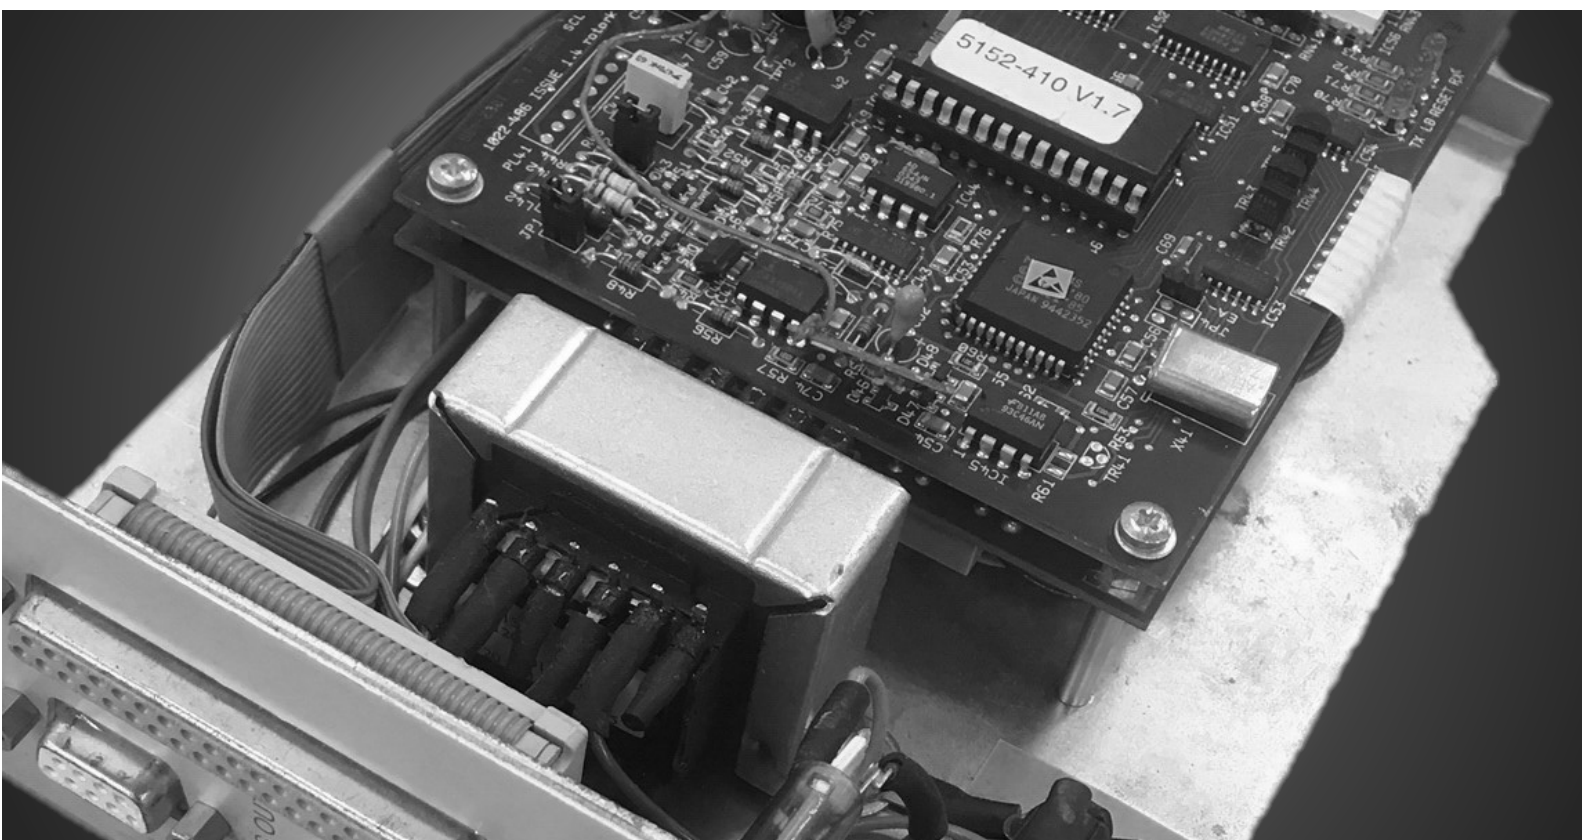

Pakscan™

TABLE OF CONTENTS

INTRODUCTION	4
PERFORMANCE SPECIFICATION	5
<i>Pakscan 2 -Wire Interface.....</i>	<i>5</i>
<i>Eight Digital Inputs</i>	<i>5</i>
<i>Four Digital Outputs</i>	<i>5</i>
<i>Two Analogue Inputs.....</i>	<i>5</i>
<i>One Analogue Output.....</i>	<i>5</i>
<i>Electrical Supply</i>	<i>5</i>
INPUT / OUTPUT DESCRIPTION	6
GENERAL PURPOSE MODE	6
<i>Alarms.....</i>	<i>6</i>
ACTUATOR MODE	6
<i>Digital control.....</i>	<i>6</i>
<i>Position control</i>	<i>6</i>
<i>Digital feedback.....</i>	<i>6</i>
<i>Analogue feedback.....</i>	<i>6</i>
<i>Alarms.....</i>	<i>6</i>
<i>Derived alarms</i>	<i>6</i>
EXPLOSIONPROOF – FLP-PB2.....	7
<i>Enclosure.....</i>	<i>7</i>
<i>Approvals</i>	<i>7</i>
<i>Alternative Approvals</i>	<i>7</i>
<i>Terminals</i>	<i>7</i>
<i>Conduit entries</i>	<i>7</i>
<i>Environmental specification.....</i>	<i>7</i>
<i>Ordering Details</i>	<i>7</i>
<i>Ordering Example.....</i>	<i>8</i>
<i>Wiring Connection Details</i>	<i>9</i>
WEATHERPROOF – WP-PB2.....	10
<i>Enclosure.....</i>	<i>10</i>
<i>Terminals</i>	<i>10</i>
<i>Conduit entries</i>	<i>10</i>
<i>Environmental specification.....</i>	<i>10</i>
<i>Ordering Details</i>	<i>10</i>
<i>Ordering Example.....</i>	<i>11</i>
<i>Wiring Connection Details</i>	<i>11</i>

PANEL MOUNTED – PM-PB2.....	12
<i>Enclosure.....</i>	<i>12</i>
<i>Terminals</i>	<i>12</i>
<i>Conduit entries</i>	<i>12</i>
<i>Environmental specification.....</i>	<i>12</i>
<i>Ordering Details</i>	<i>12</i>
<i>Ordering Example.....</i>	<i>13</i>
<i>Wiring Connection Details</i>	<i>13</i>
RACK MOUNTED – RACK-PB2	14
<i>Enclosure.....</i>	<i>14</i>
<i>Connections.....</i>	<i>14</i>
<i>Environmental specification.....</i>	<i>14</i>
<i>Ordering Details</i>	<i>14</i>

INTRODUCTION

The Pakscan General Purpose Field Control Unit (GPFCU) provides a means of controlling actuators, pumps, motors, solenoid valves, mixers, etc., as well as interfacing digital and analogue information between field process devices and a Pakscan two-wire control system. By using a Pakbox housing, the GPFCU can be field mounted in non-hazardous or hazardous areas and may often be placed close to the device being controlled or monitored.

The range of Pakbox enclosures provides a variety of enclosure protection, conduit entries and installation locations to ensure easy integration into the site process.

PakscanTM **CLASSIC**

- Long loop length, up to 20 km
- Redundant, single fault tolerant, loop
- High noise immunity, current loop
- Up to 240 field devices, on a single highway
- No external repeaters, highway terminators or biasing
- Open to third party devices
- Fast scan time due to 'report by exception' protocol
- Standard instrumentation cable

The Pakscan redundant loop network has been the network of choice for actuator control for over 30 years. Using robust current loop technology, up to 20 km loop lengths and 240 field devices are possible.

Redundant loop ensures plant operability in the event of cable break or earth fault. Each field control unit has loopback circuitry that switches in the event of a fault providing continued loop connection on the 2-wire system. Current loop technology provides high noise immunity.

Standard low cost twisted pair instrumentation cable (one pair) is required for the network loop and there are no requirements for external repeaters or network termination.

Utilising 'Report by Exception', provides efficient data reporting at low baud rates required for long distance current loop communications. Up to 20 km loop lengths and the control and monitoring of up to 240 devices are possible with no limitation on the distance between devices.

Actuators can be used as a hub or a dedicated General Purpose Field Control Unit (GPFCU) can also be used as digital and analogue I/O, providing the interfaces to connect other actuator types and additional plant control devices into the network.





PERFORMANCE SPECIFICATION

Pakscan 2 -Wire Interface

Baud Rate	2400, 1200, 600, 300 or 110
Current	20 mA
Conductors	Screened twisted pair

Eight Digital Inputs

Isolation	Mutual galvanic isolation
Input Voltage	Active: $18\text{ V} < V_i < 38\text{ V}$ Inactive: $-0.5\text{ V} < V_i < 2\text{ V}$
Pulse Input	Input 1
Pulse Width	$> 20\text{ ms}$
I/P power supply	Internal 24 V at 20 mA max

Four Digital Outputs

Contacts	Changeover
Operation	Fleeting or maintained (normally de-energised)
Voltage range	Up to 120 V
Maximum load	60 W , 125 VA , 1 A
Life	10^7 operations at 5 W load

Two Analogue Inputs

Range	$0 - 5\text{ V}$ or $4 - 20\text{ mA}$
Resolution	1.2 mV
Thermal stability	$100\text{ ppm}/^\circ\text{C}$

One Analogue Output

Voltage range	$0 - 5\text{ V}$
Resolution	1.2 mV
Thermal stability	$100\text{ ppm}/^\circ\text{C}$
Load resistance	$> 1\text{ k}\Omega$

Electrical Supply

Supply	$110\text{ VAC} \pm 20\%$ $230\text{ VAC} +10\%/-20\%$ $47 - 63\text{ Hz}$
--------	--

INPUT / OUTPUT DESCRIPTION

General Purpose Mode

Eight independent digital inputs, each suitable for use with a volt-free contact and the GPFCU 24V. Each input can be configured to invert the incoming signal. Input D1 also acts as a pulse counter up to 9,999 where one pulse is greater than 20 ms. The state of the digital outputs and their action (fleeting or maintained) is reported, as are status bits relating to the field unit itself.

Four digital outputs, each with one independently addressable changeover contact rated at 60 W, 125 VA, 1 A. All contacts can be fleeting (300 ms) or maintained (requiring an energise and de-energise command).

Two analogue inputs sharing a common. Both inputs must be configured to 4 - 20 mA or 0 - 5 V. Reported on the Pakscan network as a percentage value 0% - 100%. Current inputs are default with JP1 and JP2 fitted. For voltage inputs, remove JP1 and JP2.

One analogue output, 0 - 5 V with 1.2 mV resolution (12-bit accuracy).

Alarms

POWR - Reset (on restoration of power)
WDOG - Watchdog failure
MEMF - Memory failure
COMMS - Communication failure

Actuator Mode

The below data is only visible if it is available with the connected actuator type.

Digital control

Open, Stop, Close and ESD.

Position control

Over range 0% to 100%.

Digital feedback

The field unit reports the following status bits, (some of the options are not available on all actuator types):

OAS - Open limit switch
CAS - Closed limit switch
STOP - Motor stopped
MRUN - Motor running
MRO - Motor running in open direction
MRC - Motor running in closed direction
EXT - External digital signal, (only available when position control is **not** used).
Other status bits relating to the GPFCU are also reported (e.g. loopback on, new alarm and alarm).

Analogue feedback

Valve position from 0% - 100%.

Alarms

POWR - Reset (on restoration of power)
WDOG - Watchdog failure
MEMF - Memory failure
COMMS - Communication failure
CNA - Local control selected
MREL - Monitor relay tripped
THERM - Thermostat tripped
LSTOP - Local stop selected

Derived alarms

SFAIL - Motor start or stop failure
VOBS - Valve obstruction detected, torque tripped
VJAM - Valve stuck detected, torque tripped
MOP - Valve moved to open limit manually
MCL - Valve moved to closed limit manually
MOPG - Valve moved from closed limit manually
MCLG - Valve moved from open limit manually
EOT - Motor running at end of travel

EXPLOSIONPROOF – FLP-PB2

Enclosure

Cast aluminium (BS1490, LM25) with Rotork standard grey paint finish, BS4800-00A13, suitable for wall mounting using fixing plates or with clamps for 2" pipe mounting. Weatherproof to IEC 529, IP68.

Approvals

Hazardous area approval to EC directive 94/9/EC
EN50018 EExd. IIBT4.

Alternative Approvals

Increase safety terminations EN50019 EExde

Factory Mutual approval:

Class 1 - Groups C and D division 1 locations
per NEC Article 500.

CSA Hazardous approval:

Class 1 - Group C & D

Class 2 - Group E, F & G

Terminals

TS35 DIN rail mounted cage clamp terminals suitable for up to 1.5 mm² conductors for power and signals. Double terminations are provided for power supply, earth & loop connections. An external 6 mm tapped hole is also provided for Earthing purposes.

Conduit entries

A, B, C & D = 4 off max. M40, 1.5" ASA/NPT or PG29
E to Y = 20 off max. M20, 0.75" ASA/NPT or PG13.5.
See installation drawings for cable entry locations.

Environmental specification

Operating temperature: -30°C to +70°C




Storage temperature: -50°C to +85°C

Humidity: 5% - 95% R.H. non-condensing

Vibration: 0.75 g (0.5 Hz to 300 Hz)

Ordering Details

With all orders, it is necessary to specify the supply voltage for the field unit, the enclosure approval required, the FLP-PB2 mounting arrangement and the conduit entry holes to be drilled, together with their size. Eight holes are included in the basic price and additional holes are extra.

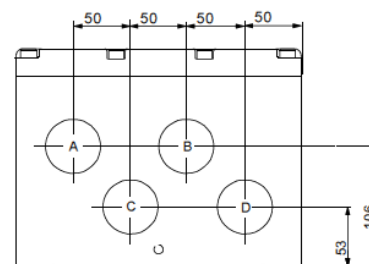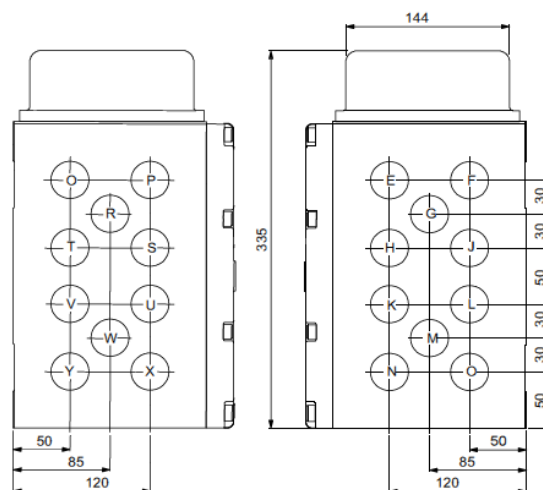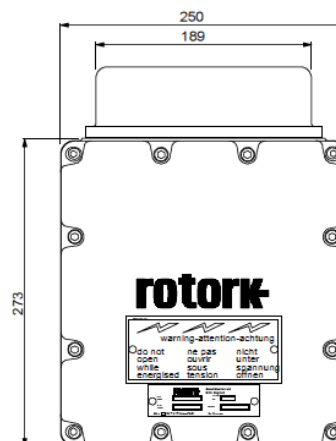


MAXIMUM CONDUIT ENTRY SIZES

LOCATION	Metric	ASA/NPT	PG
A - D	M40	1.5"	29
E - Y	M20	0.75"	13.5

Ordering Example

The order code for an explosionproof GPFCU Pakbox has the following format:

FLP - PB2 - X - XXX - X - XXXX XXXX

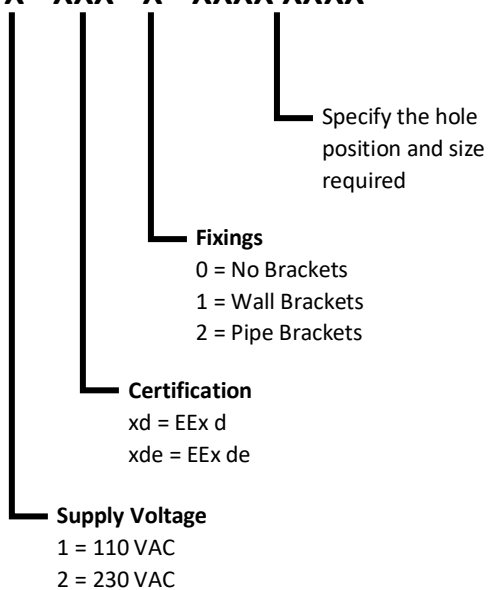


FLP - PB2 - 2 - xd - 1 - A12, B12, C12, E12, F12, H12, J12, K12

Explosionproof Pakbox
110 VAC power supply
EEx d certified enclosure
Wall brackets included
M12 conduit entries in position A, B, C, E, F, H, J and K

FLP - PB2 - 1 - xde - 0 - B40, C40, E16, F16, H16, J16

Explosionproof Pakbox
230 VAC power supply
EEx de certified enclosure
No brackets
M40 conduit entries in positions B and C
M16 conduit entries in positions E, F, H and J

Wiring Connection Details

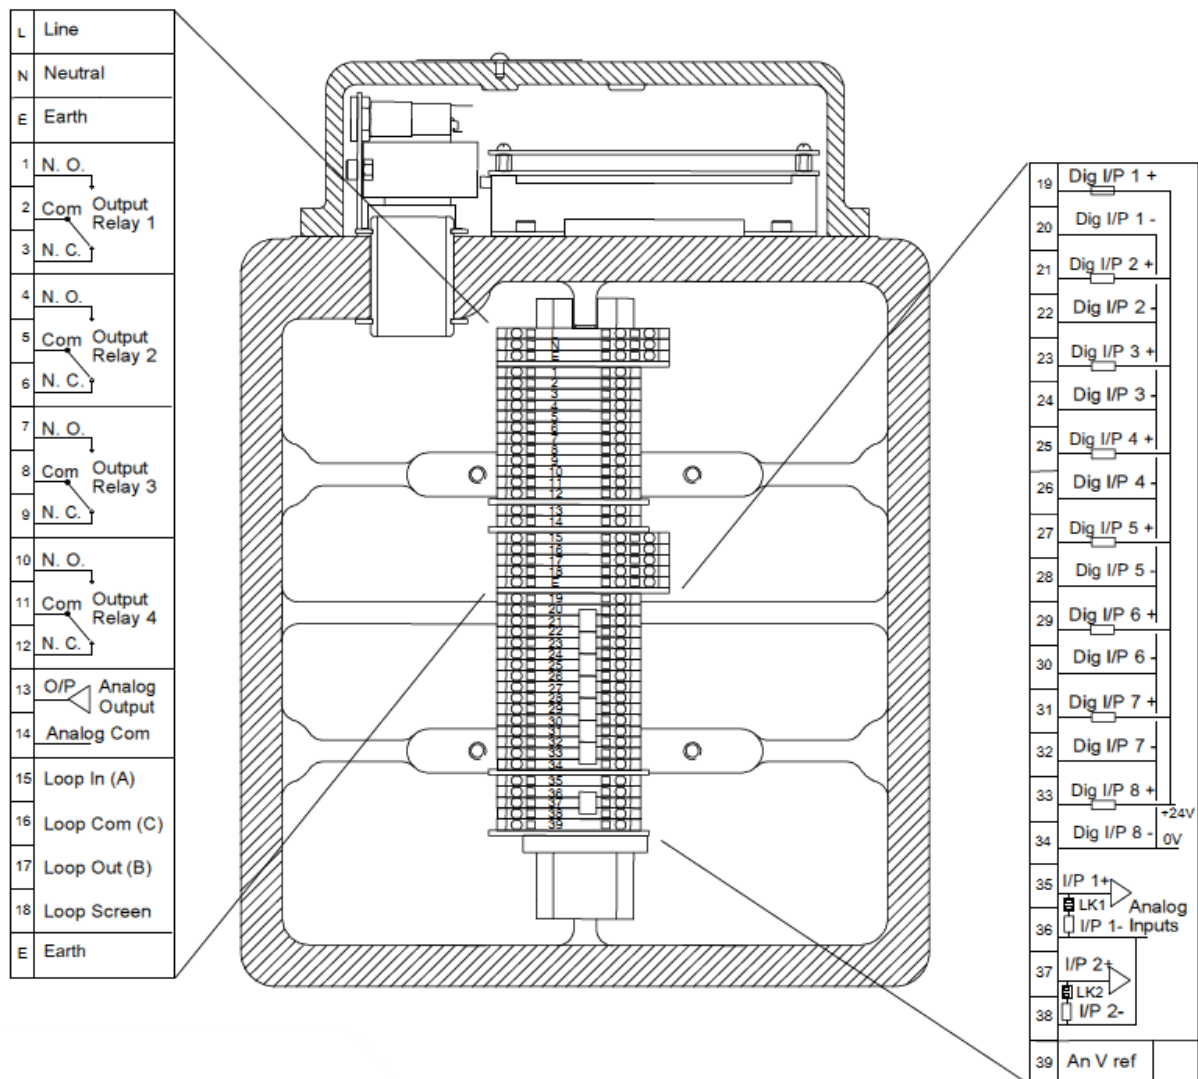

WEATHERPROOF – WP-PB2

Enclosure

Glass fibre reinforced polyester with an opaque lid, finished in grey to RAL7032. The enclosure is suitable for wall mounting or alternatively with clamps for 2" pipe mounting. The external enclosure is weatherproof to IP65. The internal enclosure is polycarbonate.

Terminals

Clamping terminals suitable for up to 4.0 mm² conductors for power supply, data highway, I/O and Earth connections.

Conduit entries



The enclosure is suitable for machining to accommodate required cable glands. No standard conduit entries are provided from the factory.

Environmental specification

Operating temperature: -30°C to +70°C
Storage temperature: -50°C to +85°C
Humidity: 5% - 95% R.H. non-condensing
Vibration: 0.75 g (0.5 Hz to 300 Hz)

Ordering Details


With all orders, it is necessary to specify the supply voltage for the field unit and the fixing option required.

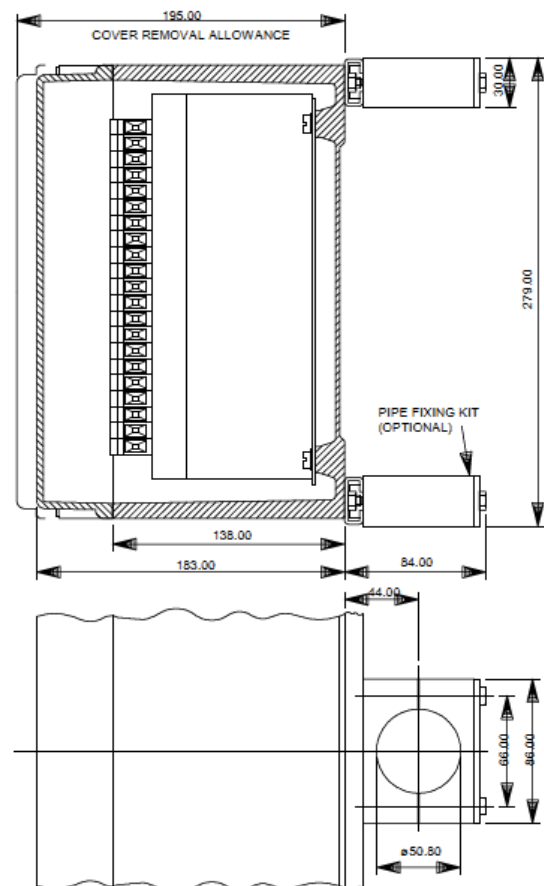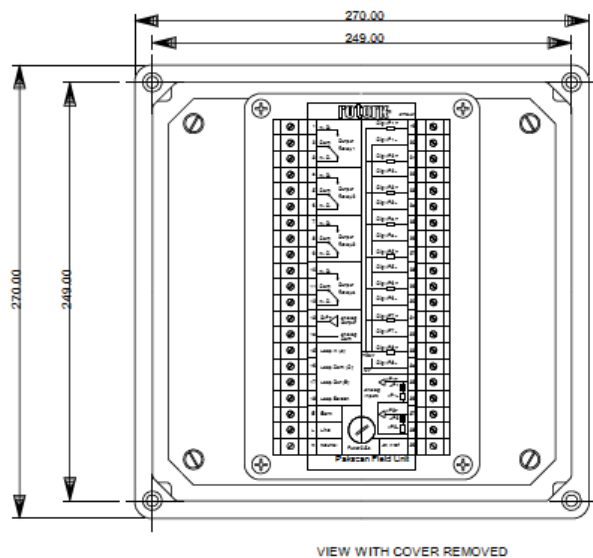

Ordering Example

The order code for a weatherproof GPFCU Pakbox has the following format:

WP - PB2 - X - X




WP - PB2 - 2 - 1

Weatherproof Pakbox
230 VAC power supply
Pipe brackets included

WP - PB2 - 1 - 0

Weatherproof Pakbox
110 VAC power supply
No brackets included

Wiring Connection Details

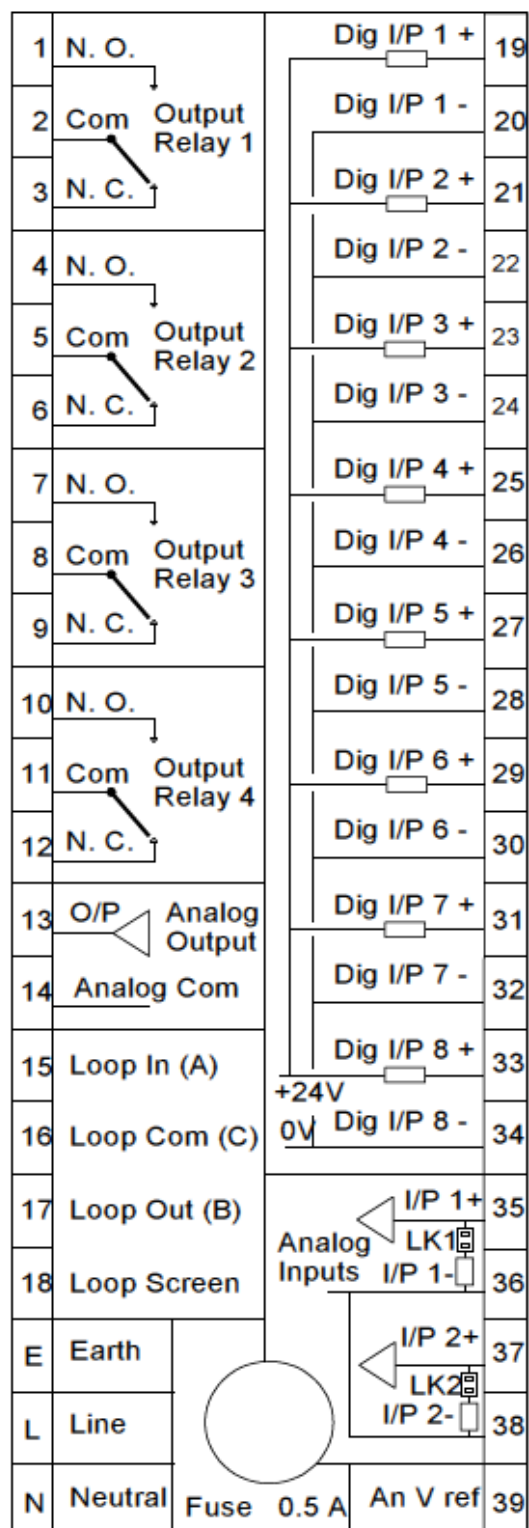

PANEL MOUNTED – PM-PB2

Enclosure

Glass fibre reinforced polyester with an opaque lid, finished to RAL7032 Grey. The enclosure is suitable for wall mounting or 2" pipe mounting. The external enclosure is weatherproof to IP65. The internal enclosure is polycarbonate.

Terminals

Clamping terminals suitable for up to 4.0 mm² conductors for power supply, data highway, I/O and Earth connections.

Conduit entries

The enclosure is suitable for machining to accommodate required cable glands. No standard conduit entries are provided from the factory.

Environmental specification

Operating temperature: -30°C to +70°C


Storage temperature: -50°C to +85°C

Relative Humidity: 5% - 95% non-condensing

Vibration: 0.75 g (0.5 Hz to 300 Hz)

Ordering Details


With all orders, it is necessary to specify the supply voltage for the field unit and the fixing option required.

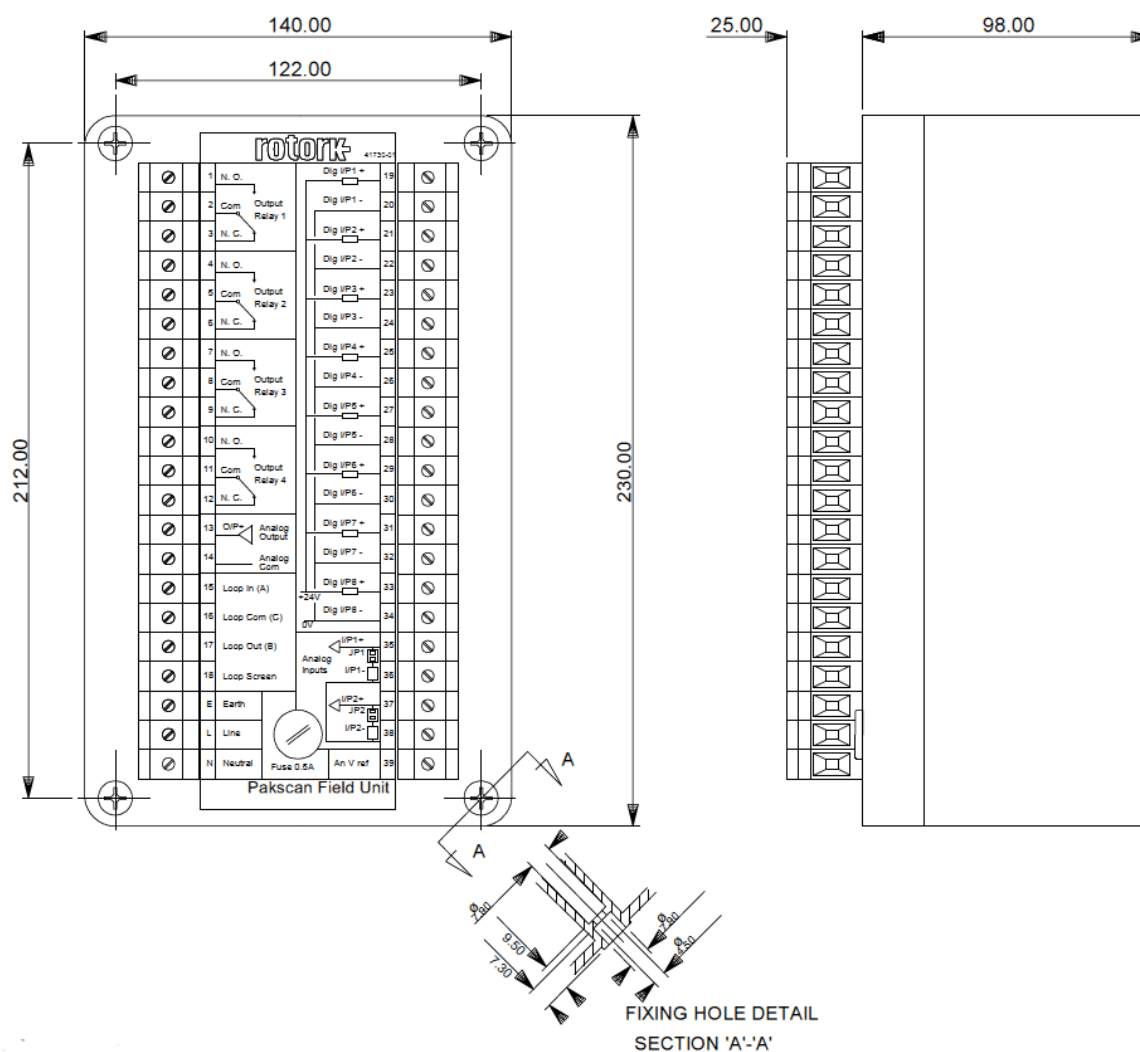

Ordering Example

The order code for a panel mounted GPFCU Pakbox has the following format:

PM - PB2 - X




PM - PB2 - 1

Panel Mounted Pakbox
110 VAC power supply

PM - PB2 - 2

Panel Mounted Pakbox
230 VAC power supply

Wiring Connection Details

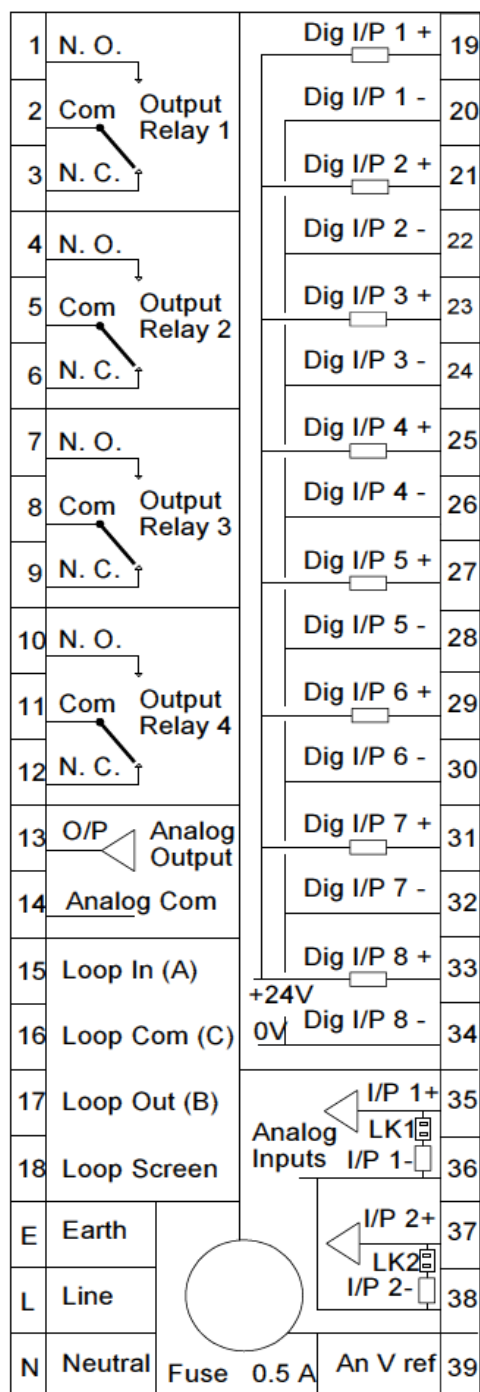

RACK MOUNTED – RACK-PB2

Enclosure

Compact form factor with fixing points to suit a 19" rack. Protection from the environment must be fulfilled by the rack cabinet. Up to seven rack mounted GPFCUs can be fitted in one 19" rack chassis.

Connections

The following connections are available:

- IEC mains power connector with fuse and indicator
- 9-way D Type (female) socket for data highway input
- 9-way D Type (male) socket for data highway output
- 37-way D Type (female) socket for I/O.

Environmental specification

Operating temperature: -30°C to +70°C



Storage temperature: -50°C to +85°C

Relative Humidity: 5% - 95% non-condensing

Vibration: 0.75 g (0.5 Hz to 300 Hz)

Ordering Details

With all orders, it is necessary to specify the supply voltage for the field unit. Supplied as a single GPFCU or installed in a 19" rack with additional GPFCUs or blanking plates. Contact Rotork to order.

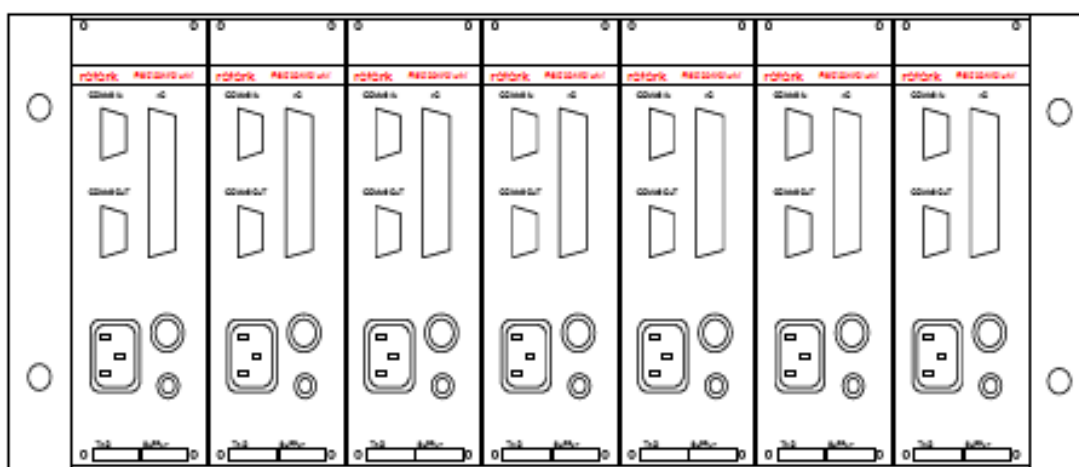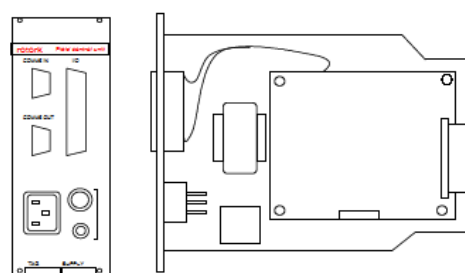

A dark, stylized world map with a grid of latitude and longitude lines, serving as a background for the lower half of the page.

www.rotork.com

A full listing of our worldwide sales and service network is available on our website.

Rotork plc

Brassmill Lane, Bath, UK

Tel +44 (0)1225 733200

Fax +44 (0)1225 333467

Email mail@rotork.com

Rotork is a corporate member of the Institute of Asset Management



PUB059-054-00

Issue 08/21

As part of a process of on-going product development, Rotork reserves the right to amend and change specifications without prior notice. Published data may be subject to change. For the very latest version release, visit our website at www.rotork.com

The name Rotork is a registered trademark. Rotork recognizes all registered trademarks. The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Rotork is under license. Published and produced in the UK by Rotork. RDH0320.