



REV.NO.	REVISION DESCRIPTION	DRAWN / DATE	REVIEWED / DATE	APPROVED / DATE
	Previous versions omitted			
3	Drawing title block updated	KCH/20190806	JJS/20190806	KTJ/20190806
4	Number range displys changed	KYJ/20241119	JJS/20241119	KTJ/20241119

ELECTRICAL CONNECTION	
Uv, +24	① □ ⑥ +IN (0-20 mA)
Uv, GND	② □ ⑦ +IN (0-5 / 10V)
F.G	③ □ ⑧ -IN (0-5V / 10V / 20 mA)
(4-20 mA) { +IN	④ □ ⑨ +OUT } (4-20 mA)
{ -IN	⑤ □ ⑩ -OUT

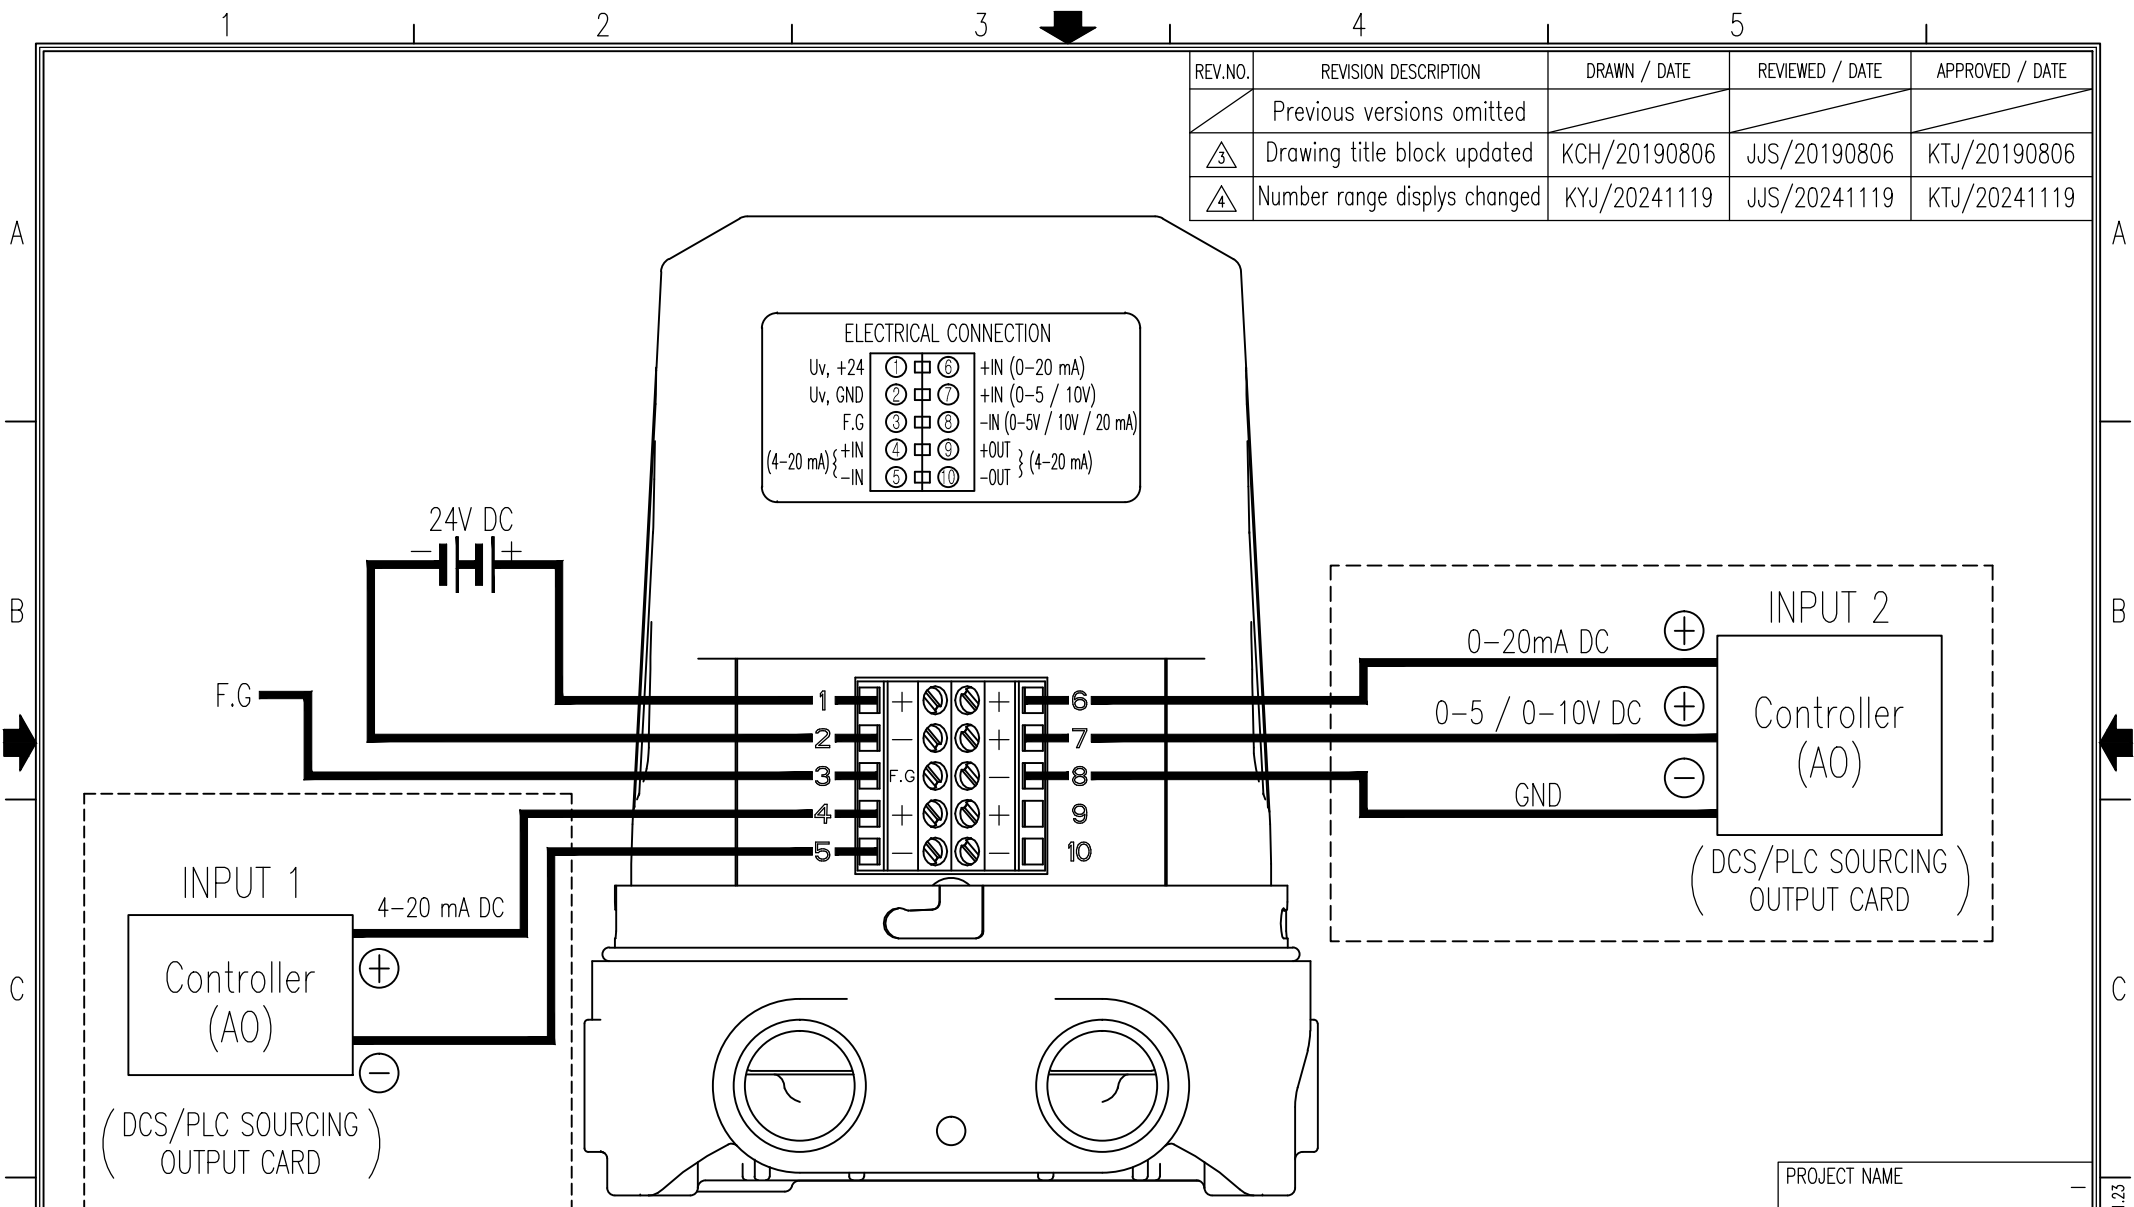

**NOTE**

1. 4-20 mA Analog Output OPTION WIRING DIAGRAM.
2. Input signal use only one of input1, input2.
3. ⊕ terminal(6, 7) of INPUT2 must be use to match a signal.

SURFACE TEXTURE		PRODUCT NAME		 Rotork YTC Limited <small>GIMPO-SI, KOREA</small>	
-		TOP MOUNTED POSITIONER			
FINISH TREATMENT		MODEL		TITLE	
-		TMP-3000		TMP-3000 Standard WIRING DIAGRAM	
MATERIAL		PROJECTION	SCALE	DRAWING NO.	
-		3rd	-	3000-01	
OTHERWISE NOTE	GENERAL TOLERANCE	QUANTITY	SHEET No.	REV.	
-	-	1	1 / 1	4	

PROJECT NAME \_\_\_\_\_