


*** Micro Switch Rating**

OMRON V-165-1A5 (Standard)	OMRON SS-5GL (Special)
AC 250V 16A DC 125V 0.6A DC 250V 0.3A	AC 125V 5A AC 250V 3A

REV.NO.	REVISION DESCRIPTION	DRAWN / DATE	REVIEWED / DATE	APPROVED / DATE
	Previous versions omitted			
△	PTM line modified	KBJ/20200917	JJS/20200917	KTJ/20200917
△	Number range displs changed	KYJ/20241119	JJS/20241119	KTJ/20241119

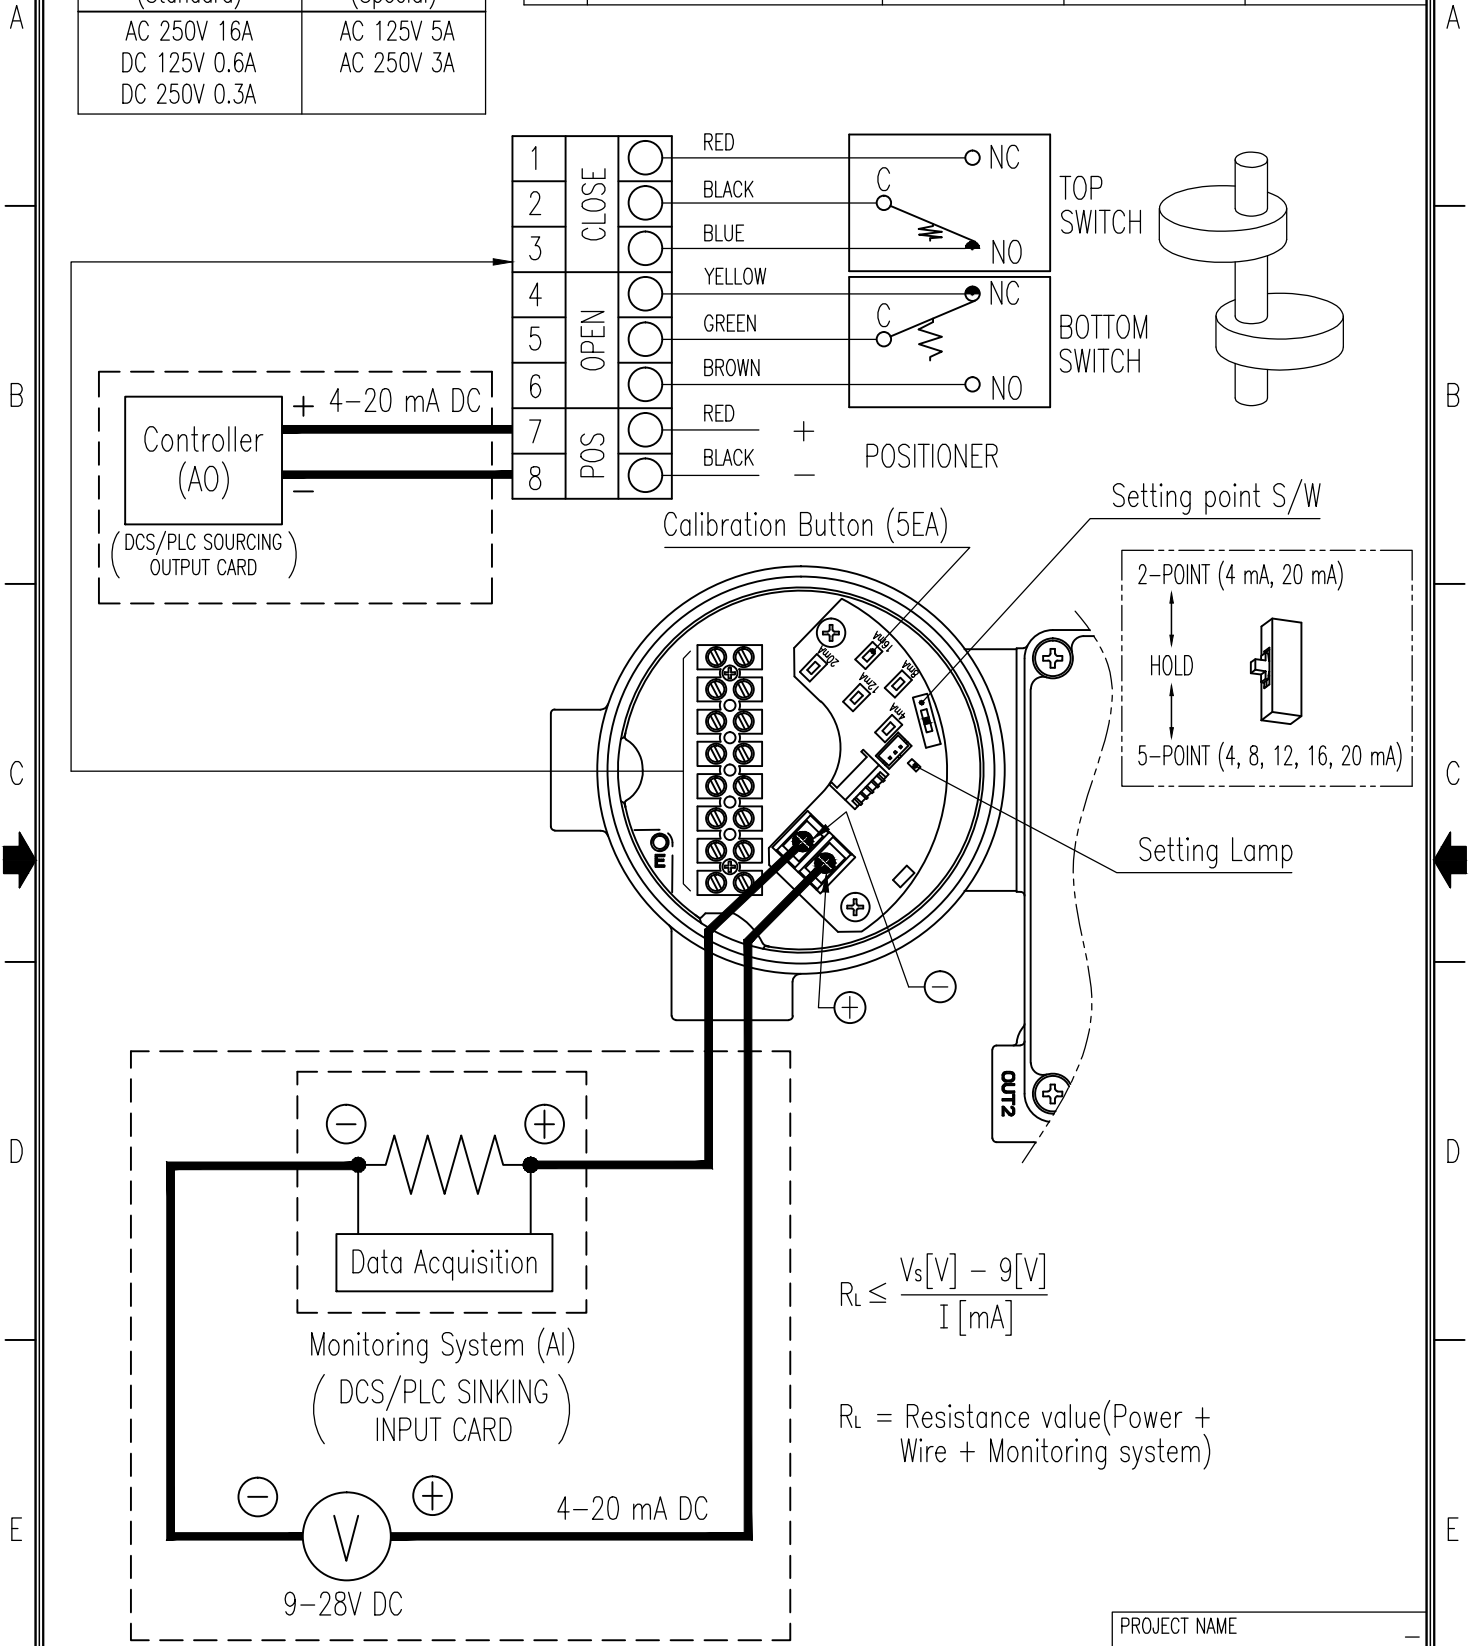

$$R_L \leq \frac{V_s[V] - 9[V]}{I[mA]}$$

R_L = Resistance value(Power + Wire + Monitoring system)

PROJECT NAME _____

SURFACE TEXTURE		PRODUCT NAME		Rotork YTC Limited GIMPO-SI, KOREA	
-		E/P POSITIONER			
FINISH TREATMENT		MODEL		TITLE YT-1000R + SPTM + L/S(SPDT) internal WIRING DIAGRAM	
-		YT-1000R			
MATERIAL		PROJECTION	SCALE	DRAWING NO.	
-		3rd	-		
OTHERWISE NOTE	GENERAL TOLERANCE	QUANTITY	SHEET No.	REV.	
-	-	1	1 / 1	1000-09 7	

2019.01.23