


1 2 3 4 5 6 7

REV.NO.	REVISION DESCRIPTION	DRAWN / DATE	REVIEWED / DATE	APPROVED / DATE
	Previous versions omitted			
△6	Modify "PLUG DRAIN" Material data	OSS/20220531	JCS/20220531	KTJ/20220531
△7	Range display changed	KCH/20241220	JCS/20241220	KTJ/20241220

Characteristic

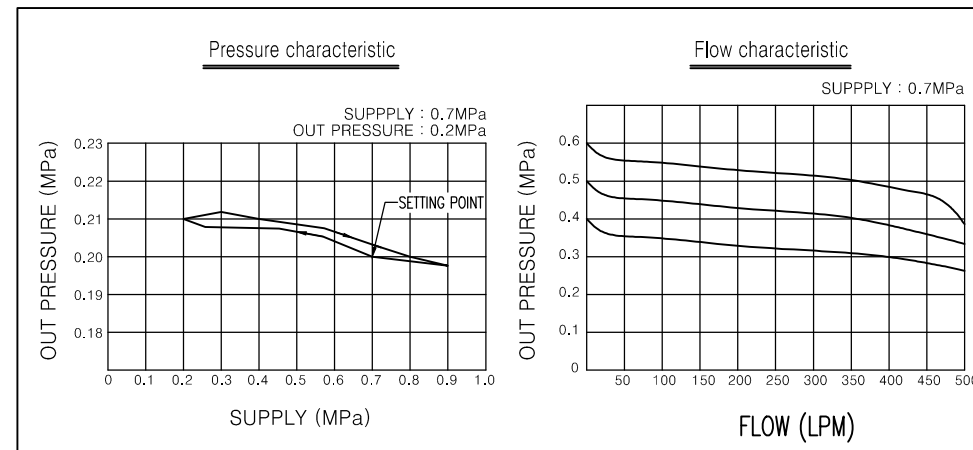





Specification

Item	Description
Max. supply pressure	1.7 MPa (17 bar)
Out pressure	☐ A : 0 to 0.42 MPa (4.2 bar) ☐ B : 0 to 0.84 MPa (8.4 bar)
Air connection, Gauge connection	☐ Rc 1/4 ☐ 1/4 NPT
Ambient temperature	Standard ☐ -20 to 70 °C (-4 to 158 °F)
	High ☐ -20 to 120 °C (-4 to 248 °F)
	Low ☐ -40 to 70 °C (-40 to 158 °F)
	Arctic ☐ -50 to 70 °C (-58 to 158 °F)
Min. filtering size	5 Micron
Housing material	Aluminum
Weight	0.62 kg (1.4 lb)

No.	Part name	Material	Q'ty	Remark
1	Adjust bolt	STS304+PC	1	
2	Nut(M8x1.0P)	STS304	1	
3	Base cover	ALDC12	1	
4	Diaphragm ass'y	NBR	1	Standard
		Silicone		Low/High/Arctic Temp.
5	Base body	ALDC12	1	
6	Filter case	ALDC12	1	
7	Drain plug	STS303+PC	1	

Pressure gauge

No.	Out pressure	Part name	Specification	Material	Q'ty
8	A type	☐ None		STS304	1
		☐ Agage-05	Rc 1/4, 0.4 MPa		
		☐ Agage-08	1/4 NPT, 0.4 MPa		
		☐ Agage-07	Rc 1/4, 1.0 MPa		
	B type	☐ Agege-10	1/4 NPT, 1.0 MPa		

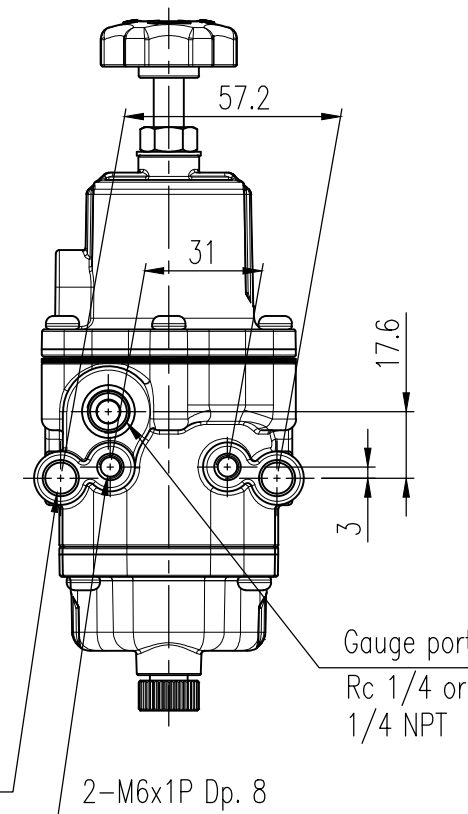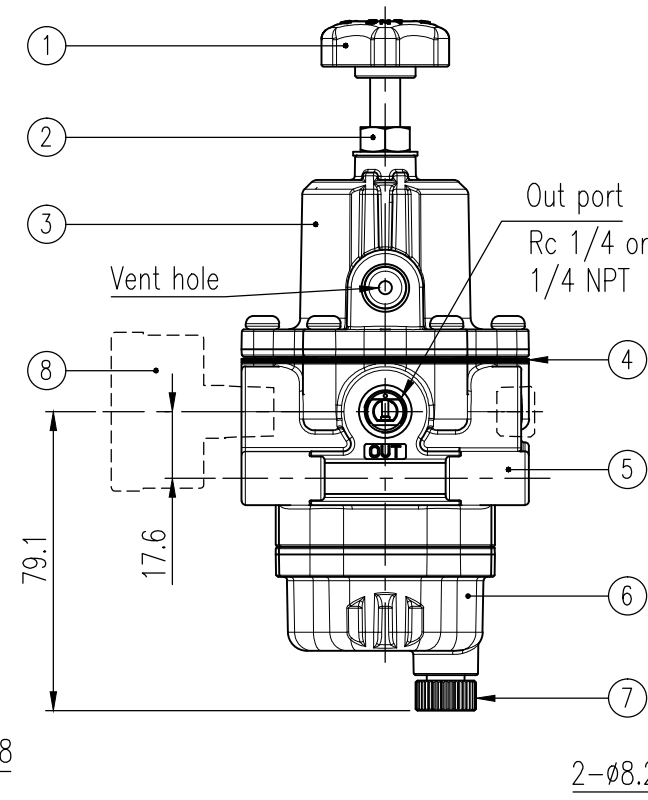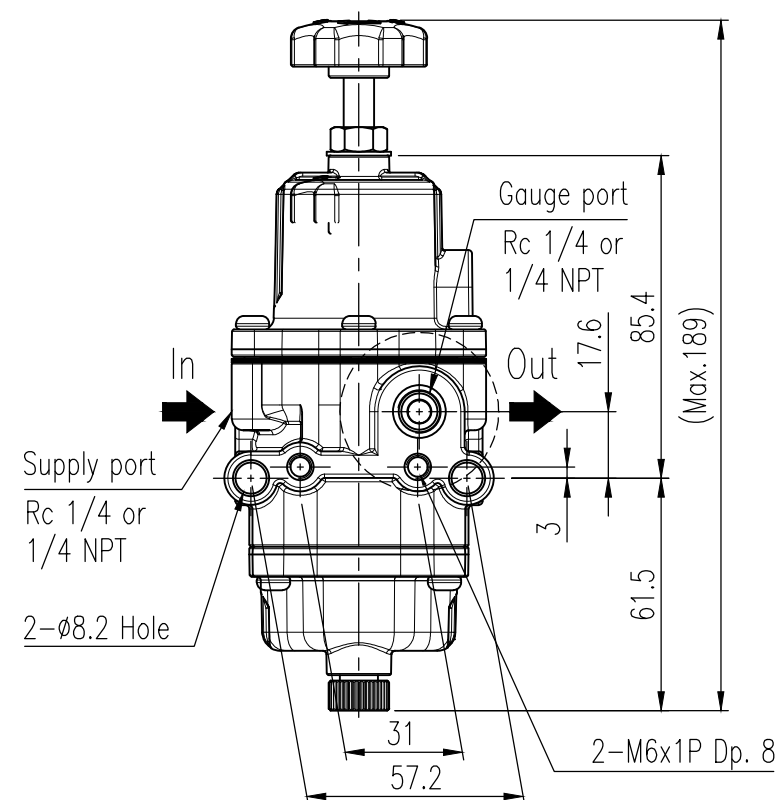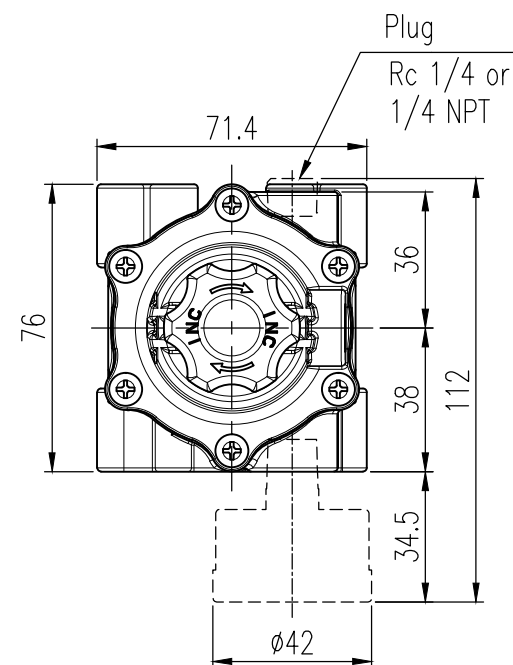

NOTE

1. Condensation capacity of filter case : 32 cm³

SURFACE TEXTURE		PRODUCT NAME		rotork® Rotork YTC Limited GIMPO-SI, KOREA	
FINISH TREATMENT		MODEL			
MATERIAL		PROJECTION	SCALE	TITLE	
OTHERWISE NOTE		GENERAL TOLERANCE	QUANTITY		
—		—	—	Standard type	
—		—	—	DRAWING NO.	
—		—	—	YT-200-01	
—		—	—	REV.	
—		—	—	7	