



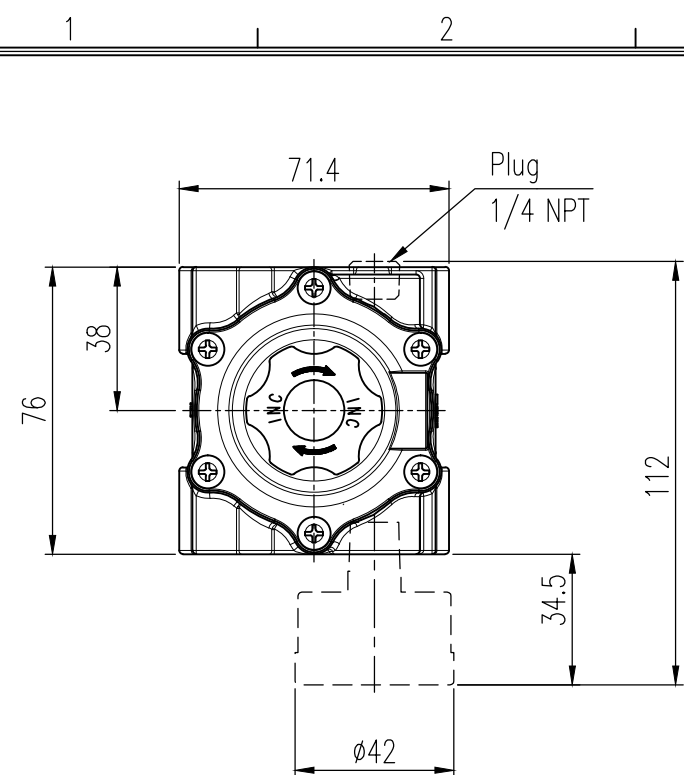



Characteristic

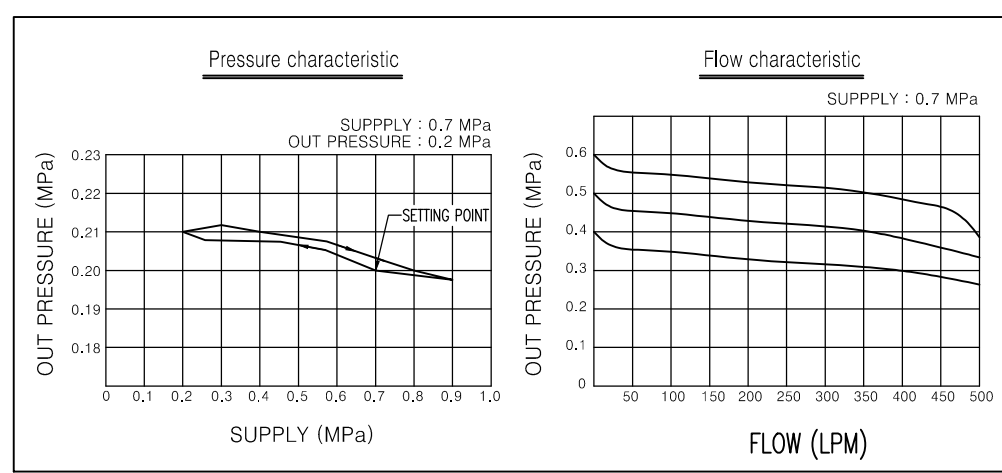

REV.NO.	REVISION DESCRIPTION	DRAWN / DATE	REVIEWED / DATE	APPROVED / DATE
	Previous versions omitted			
④	Company name changed ...	KSH/20190925	KCH/20190925	KTJ/20190925
⑤	Range display changed	KCH/20241220	JCS/20241220	KTJ/20241220

Specification

Item	Description
Max. supply pressure	1.7 MPa (17bar)
Out pressure	☐ A : 0 to 0.42 MPa (4.2 bar)
	☐ B : 0 to 0.84 MPa (8.4 bar)
Air connection	1/4 NPT
Gauge connection	1/4 NPT
Ambient temperature	-20 to 70 °C (-4 to 158 °F)
Min. Filtering Size	5 Micron
Housing material	Stainless Steel 316
Weight	1.7 kg (3.8 lb)

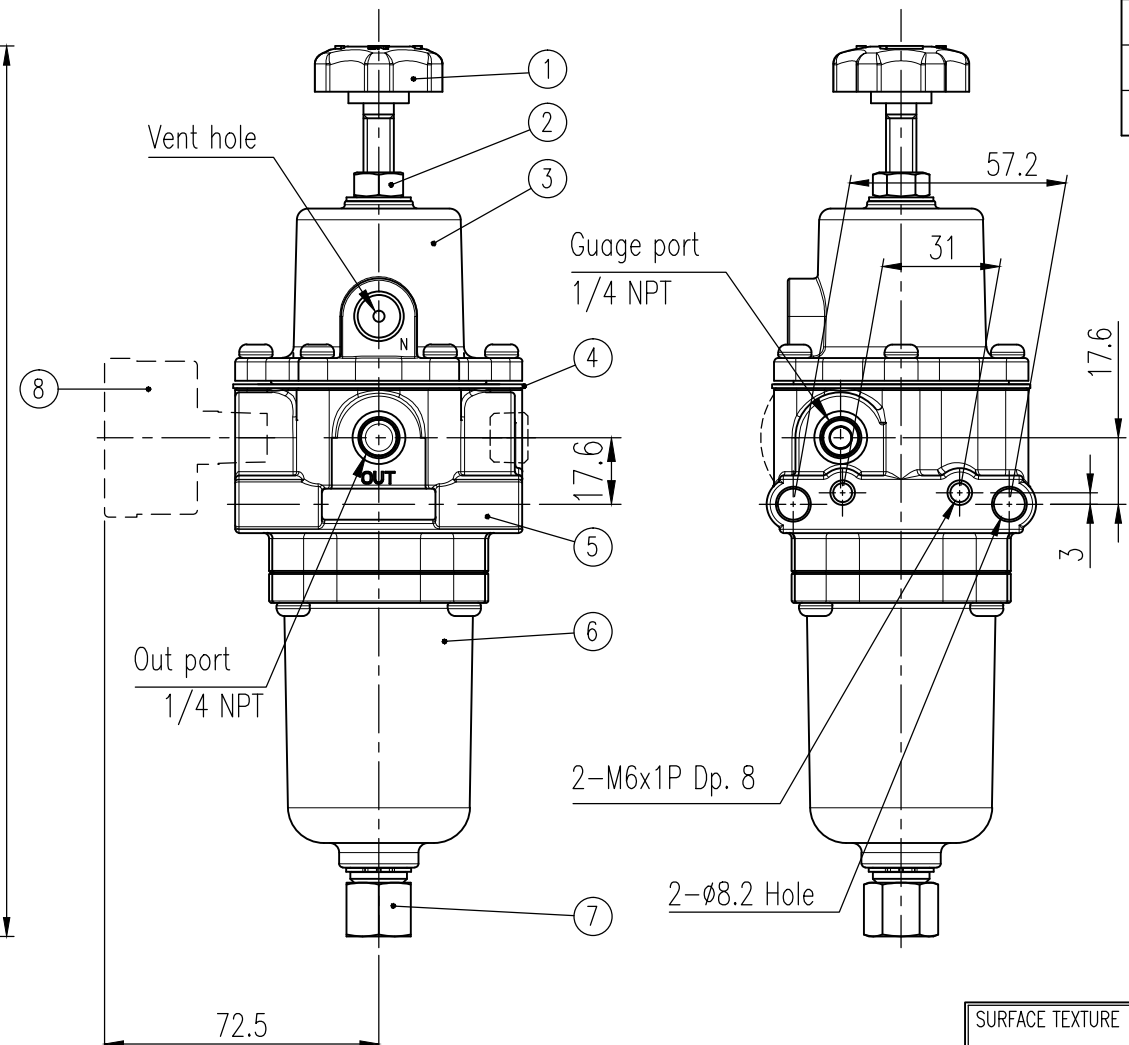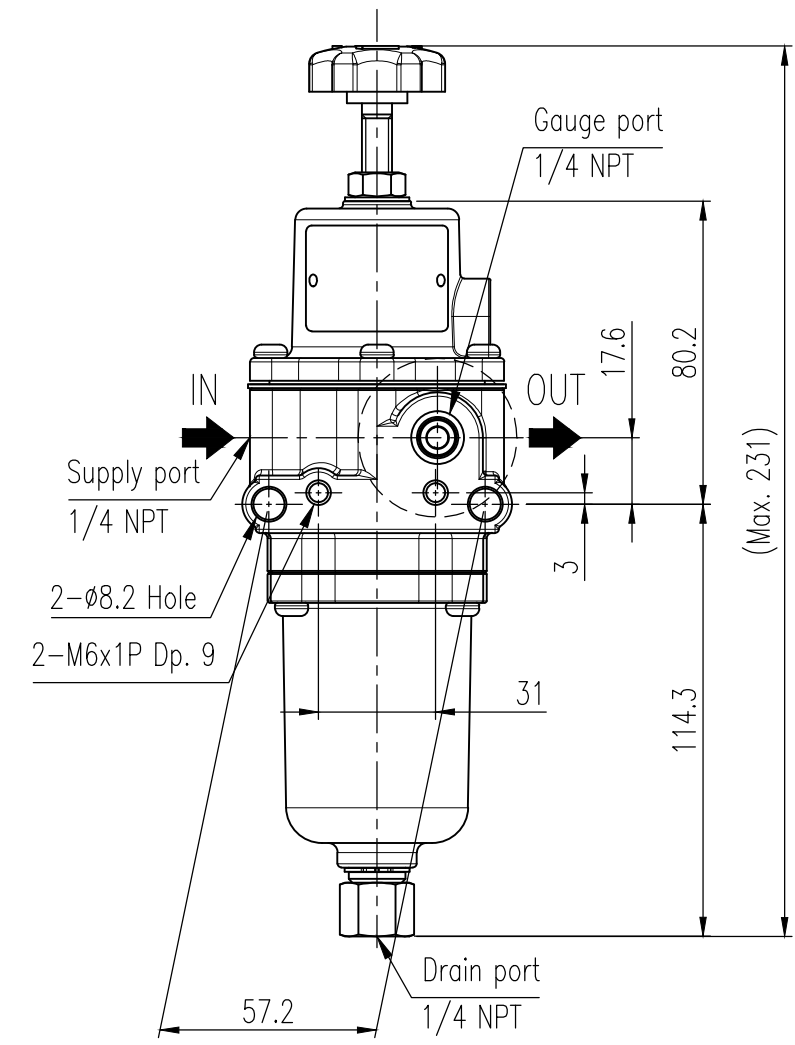

No.	Part name	Material	Q'ty	Remark
1	Adjust bolt	STS304+PC	1	
2	Nut(M8x1.0P)	STS316	1	
3	Base cover	STS316	1	
4	Diaphragm ass'y	NBR		
5	Base body	STS316	1	
6	Auto drain-filter case	STS316	1	
7	Auto drain- drain plug	STS316	1	

Pressure gauge

No.	Out pressure	Part name	Specification	Material	Q'ty
8		☐ None			
	A type	☐ Agage-28	1/4 NPT, 0.4 MPa	STS316	1
	B type	☐ Agage-30	1/4 NPT, 1.0 MPa		

SURFACE TEXTURE		PRODUCT NAME		rotork[®] Rotork YTC Limited GIMPO-SI, KOREA	
FINISH TREATMENT		MODEL			
		Air filter regulator		YT-205	
MATERIAL		PROJECTION	SCALE	TITLE	
			1 / 2		
OTHERWISE NOTE	GENERAL TOLERANCE	QUANTITY	SHEET No.	DRAWING NO.	
			1 / 1		
				Auto drain type	
				REV.	
				YT-205-02	
				5	