

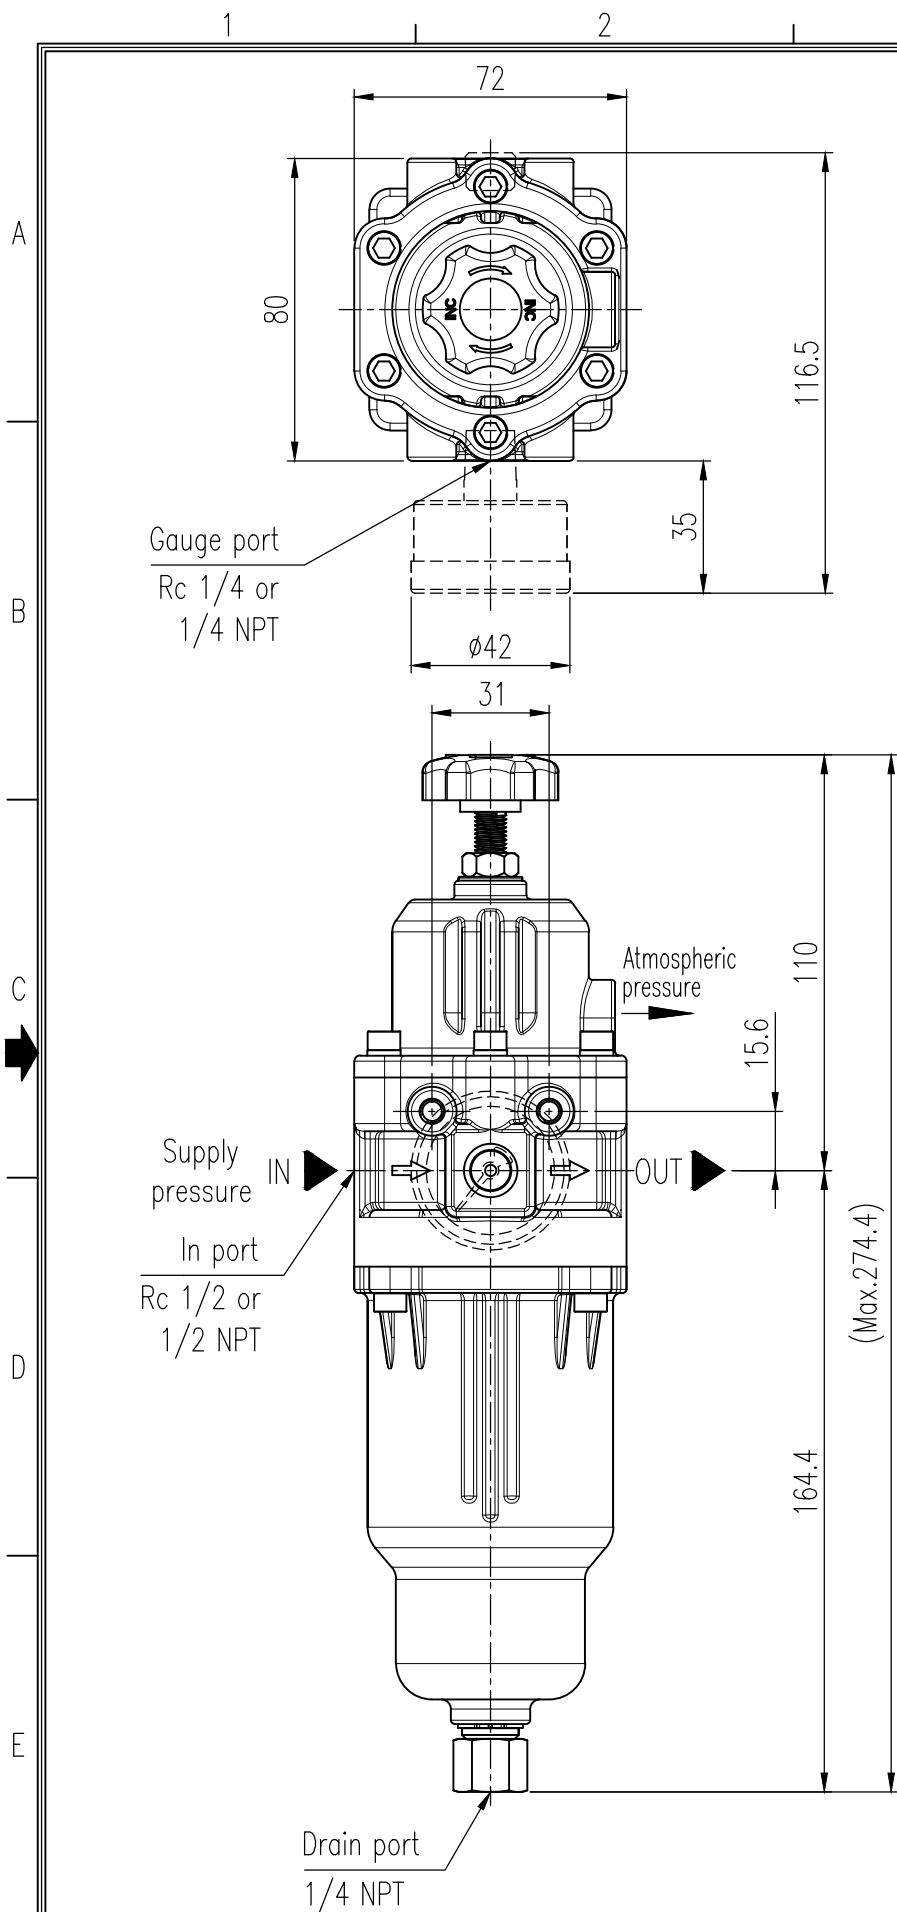


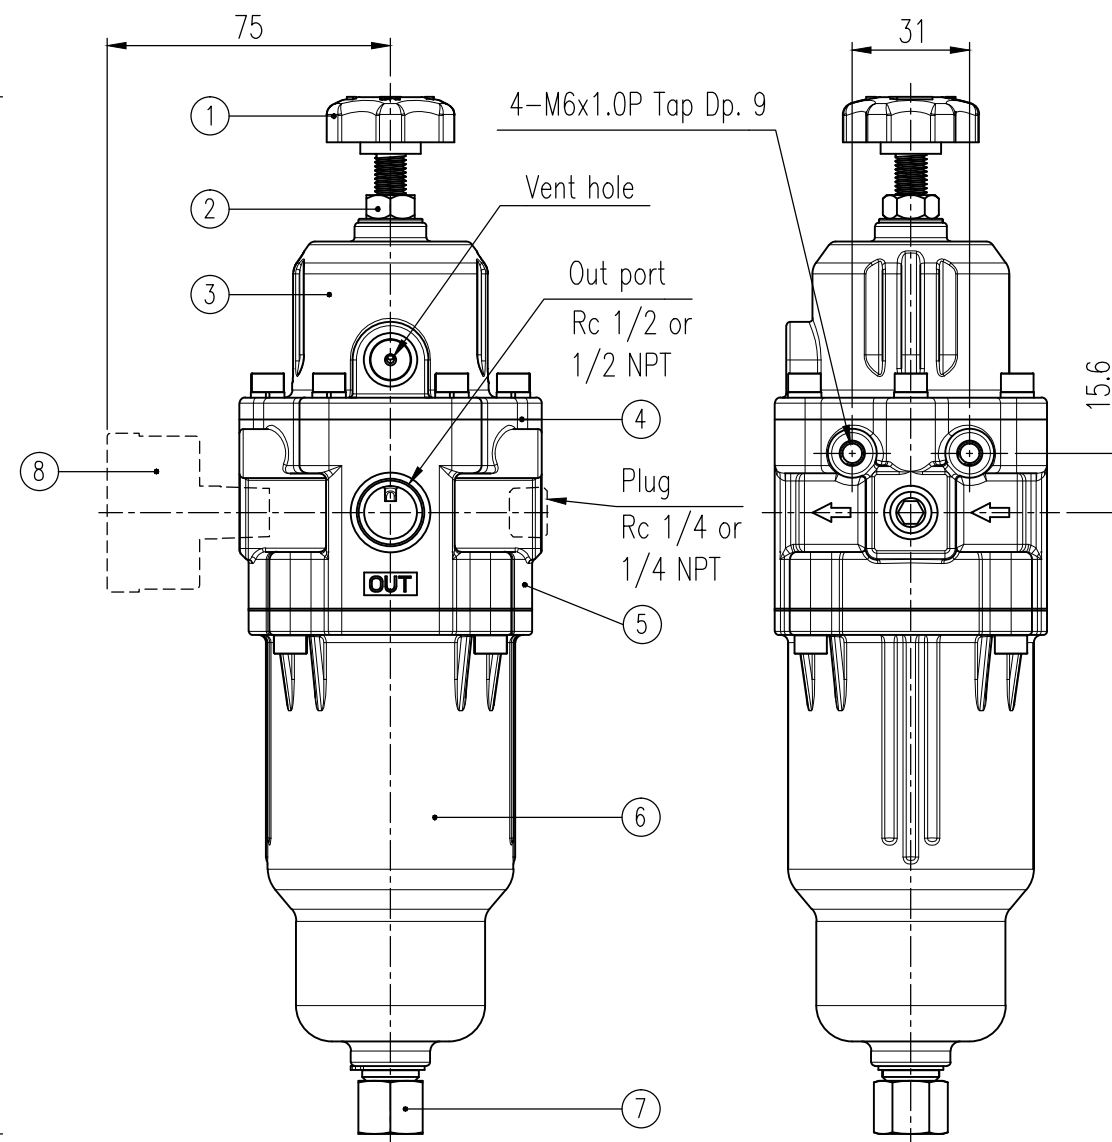

Characteristic

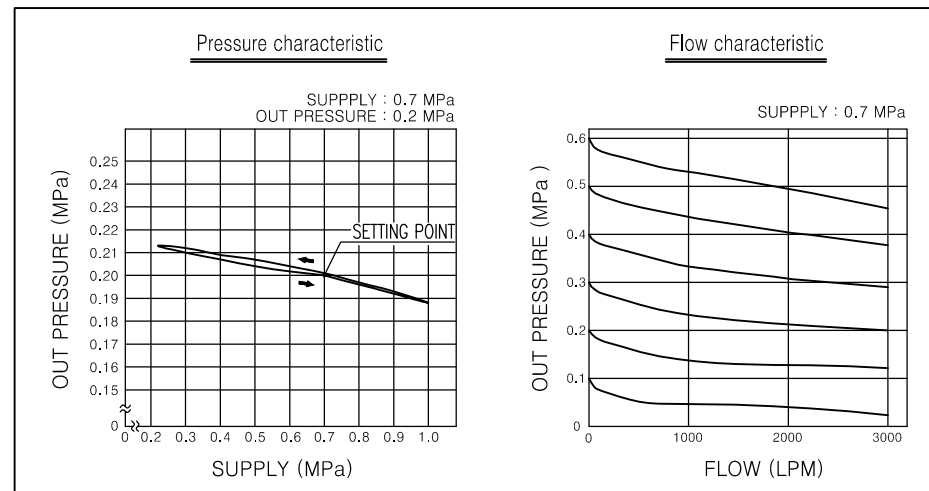

REV.NO.	REVISION DESCRIPTION	DRAWN / DATE	REVIEWED / DATE	APPROVED / DATE
	Previous versions omitted			
5	Company name changed ...	KSH/20190925	KCH/20190925	KTJ/20190925
6	Range display changed	KCH/20241220	JCS/20241220	KTJ/20241220

Specification

Item	Description
Max. supply pressure	1.7 MPa (17 bar)
Out pressure	☐ A : 0 to 0.42 MPa (4.2 bar) ☐ B : 0 to 0.84 MPa (8.4 bar)
Air connection, Gauge connection	☐ Rc 1/4 ☐ 1/4 NPT
Ambient temperature	-20 to 70 °C (-4 to 158 °F)
Min. filtering size	5 Micron
Housing material	Aluminum
Weight	0.94 kg (2.1 lb)

No.	Part name	Material	Q'ty	Remark
1	Adjust bolt	STS304+PC	1	
2	Nut(M8x1.0P)	STS304	1	
3	Base cover	ALDC12	1	
4	Diaphragm ass'y	NBR		
5	Base body	ALDC12	1	
6	Auto drain-filter case	ALDC12	1	
7	Auto drain- drain plug	STS304	1	

Pressure gauge

No.	Out pressure	Part name	Specification	Material	Q'ty
8	A type	☐ None		STS304	1
		☐ Agage-05	Rc 1/4, 0.4 MPa		
		☐ Agage-08	1/4 NPT, 0.4 MPa		
	B type	☐ Agage-07	Rc 1/4, 1.0 MPa		
		☐ Agage-10	1/4 NPT, 1.0 MPa		

SURFACE TEXTURE		PRODUCT NAME		 Rotork YTC Limited GIMPO-SI, KOREA	
FINISH TREATMENT		MODEL			
		YT-220		TITLE	
MATERIAL		PROJECTION	SCALE		
			1 / 2	Auto drain type	
OTHERWISE NOTE	GENERAL TOLERANCE	QUANTITY	SHEET No.		
			1 / 1	DRAWING NO.	
				YT-220-2	
				REV.	
				6	