


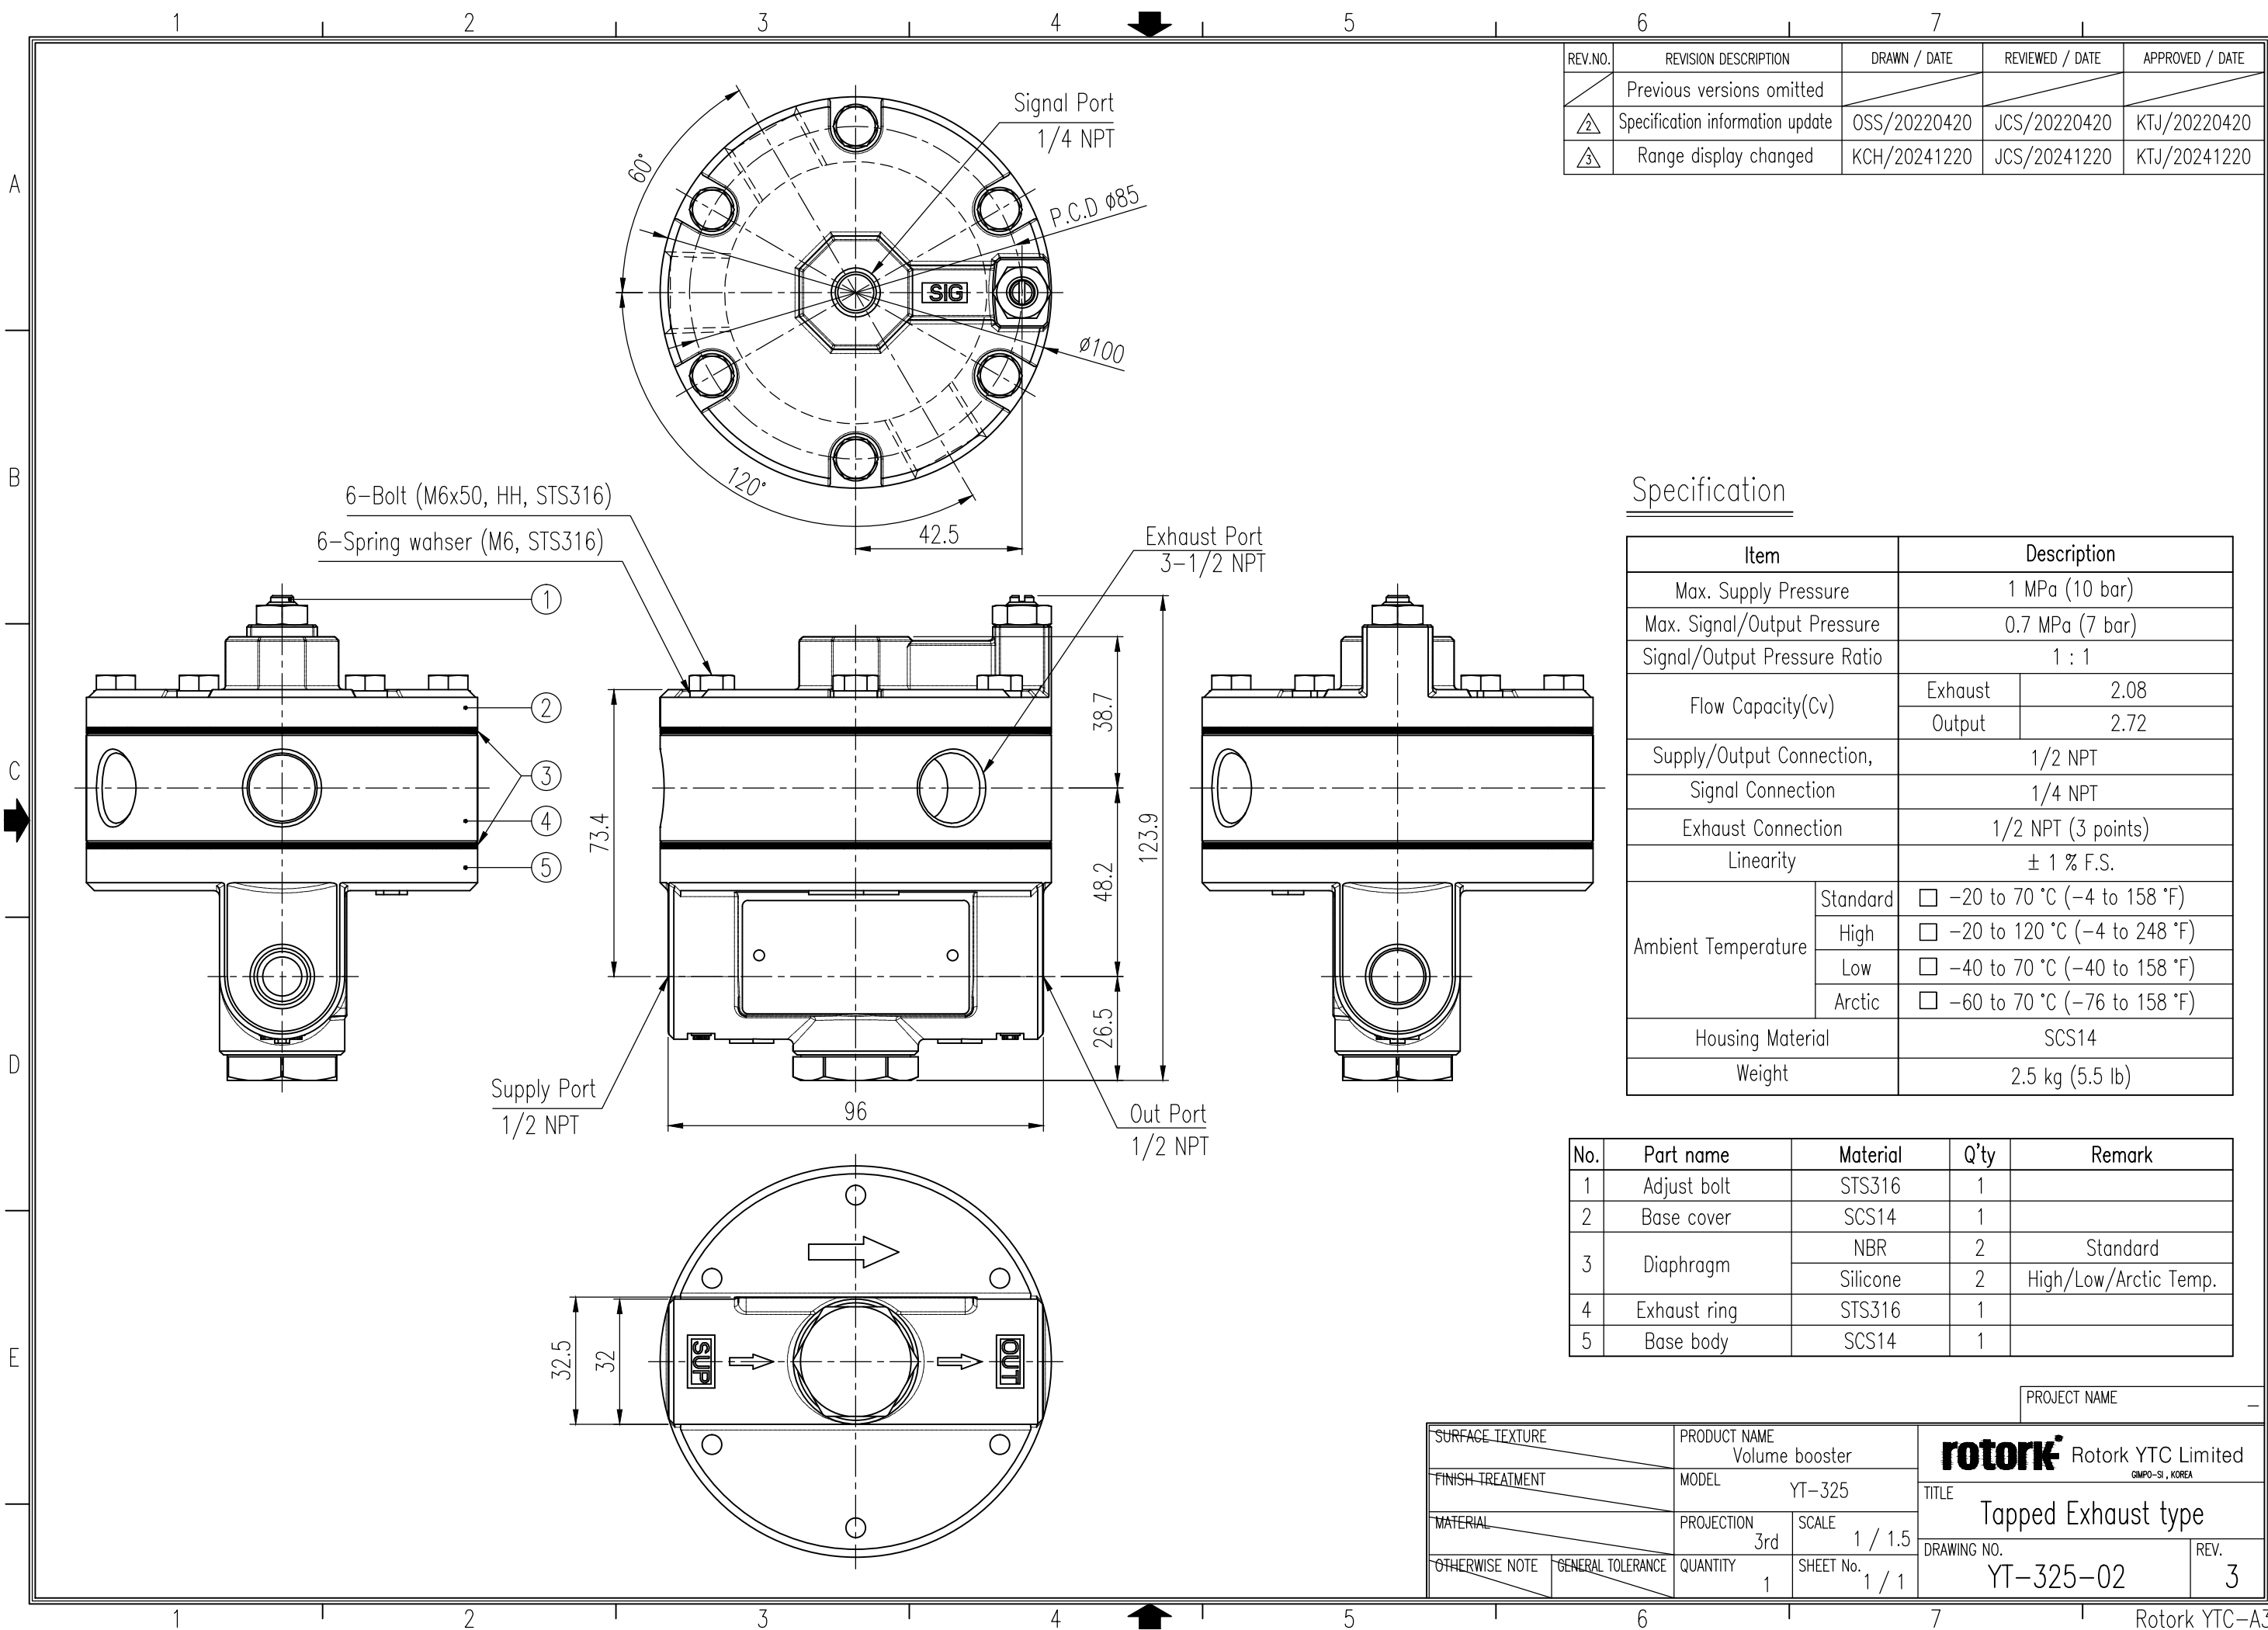

REV.NO.	REVISION DESCRIPTION	DRAWN / DATE	REVIEWED / DATE	APPROVED / DATE
	Previous versions omitted			
△	Specification information update	OSS/20220420	JCS/20220420	KTJ/20220420
△	Range display changed	KCH/20241220	JCS/20241220	KTJ/20241220

Specification

Item		Description
Max. Supply Pressure		1 MPa (10 bar)
Max. Signal/Output Pressure		0.7 MPa (7 bar)
Signal/Output Pressure Ratio		1 : 1
Flow Capacity(Cv)	Exhaust	2.08
	Output	2.72
Supply/Output Connection,		1/2 NPT
Signal Connection		1/4 NPT
Exhaust Connection		1/2 NPT (3 points)
Linearity		± 1 % F.S.
Ambient Temperature	Standard	☐ -20 to 70 °C (-4 to 158 °F)
	High	☐ -20 to 120 °C (-4 to 248 °F)
	Low	☐ -40 to 70 °C (-40 to 158 °F)
	Arctic	☐ -60 to 70 °C (-76 to 158 °F)
Housing Material		SCS14
Weight		2.5 kg (5.5 lb)

No.	Part name	Material	Q'ty	Remark
1	Adjust bolt	STS316	1	
2	Base cover	SCS14	1	
3	Diaphragm	NBR	2	Standard
		Silicone	2	High/Low/Arctic Temp.
4	Exhaust ring	STS316	1	
5	Base body	SCS14	1	

PROJECT NAME

SURFACE TEXTURE		PRODUCT NAME		rotork Rotork YTC Limited GIMPO-SI, KOREA	
		Volume booster			
FINISH TREATMENT		MODEL		TITLE Tapped Exhaust type	
		YT-325			
MATERIAL		PROJECTION	SCALE	DRAWING NO.	
		3rd	1 / 1.5		
OTHERWISE NOTE		QUANTITY	SHEET No.	REV.	
		1	1 / 1		
GENERAL TOLERANCE				YT-325-02	
				3	