


REV.NO.	REVISION DESCRIPTION	DRAWN / DATE	REVIEWED / DATE	APPROVED / DATE
	Previous versions omitted			
2	Drawing title block updated	KCH/20190801	JJS/20190801	KTJ/20190801
3	Number range dispys changed	KYJ/20241119	JJS/20241119	KTJ/20241119

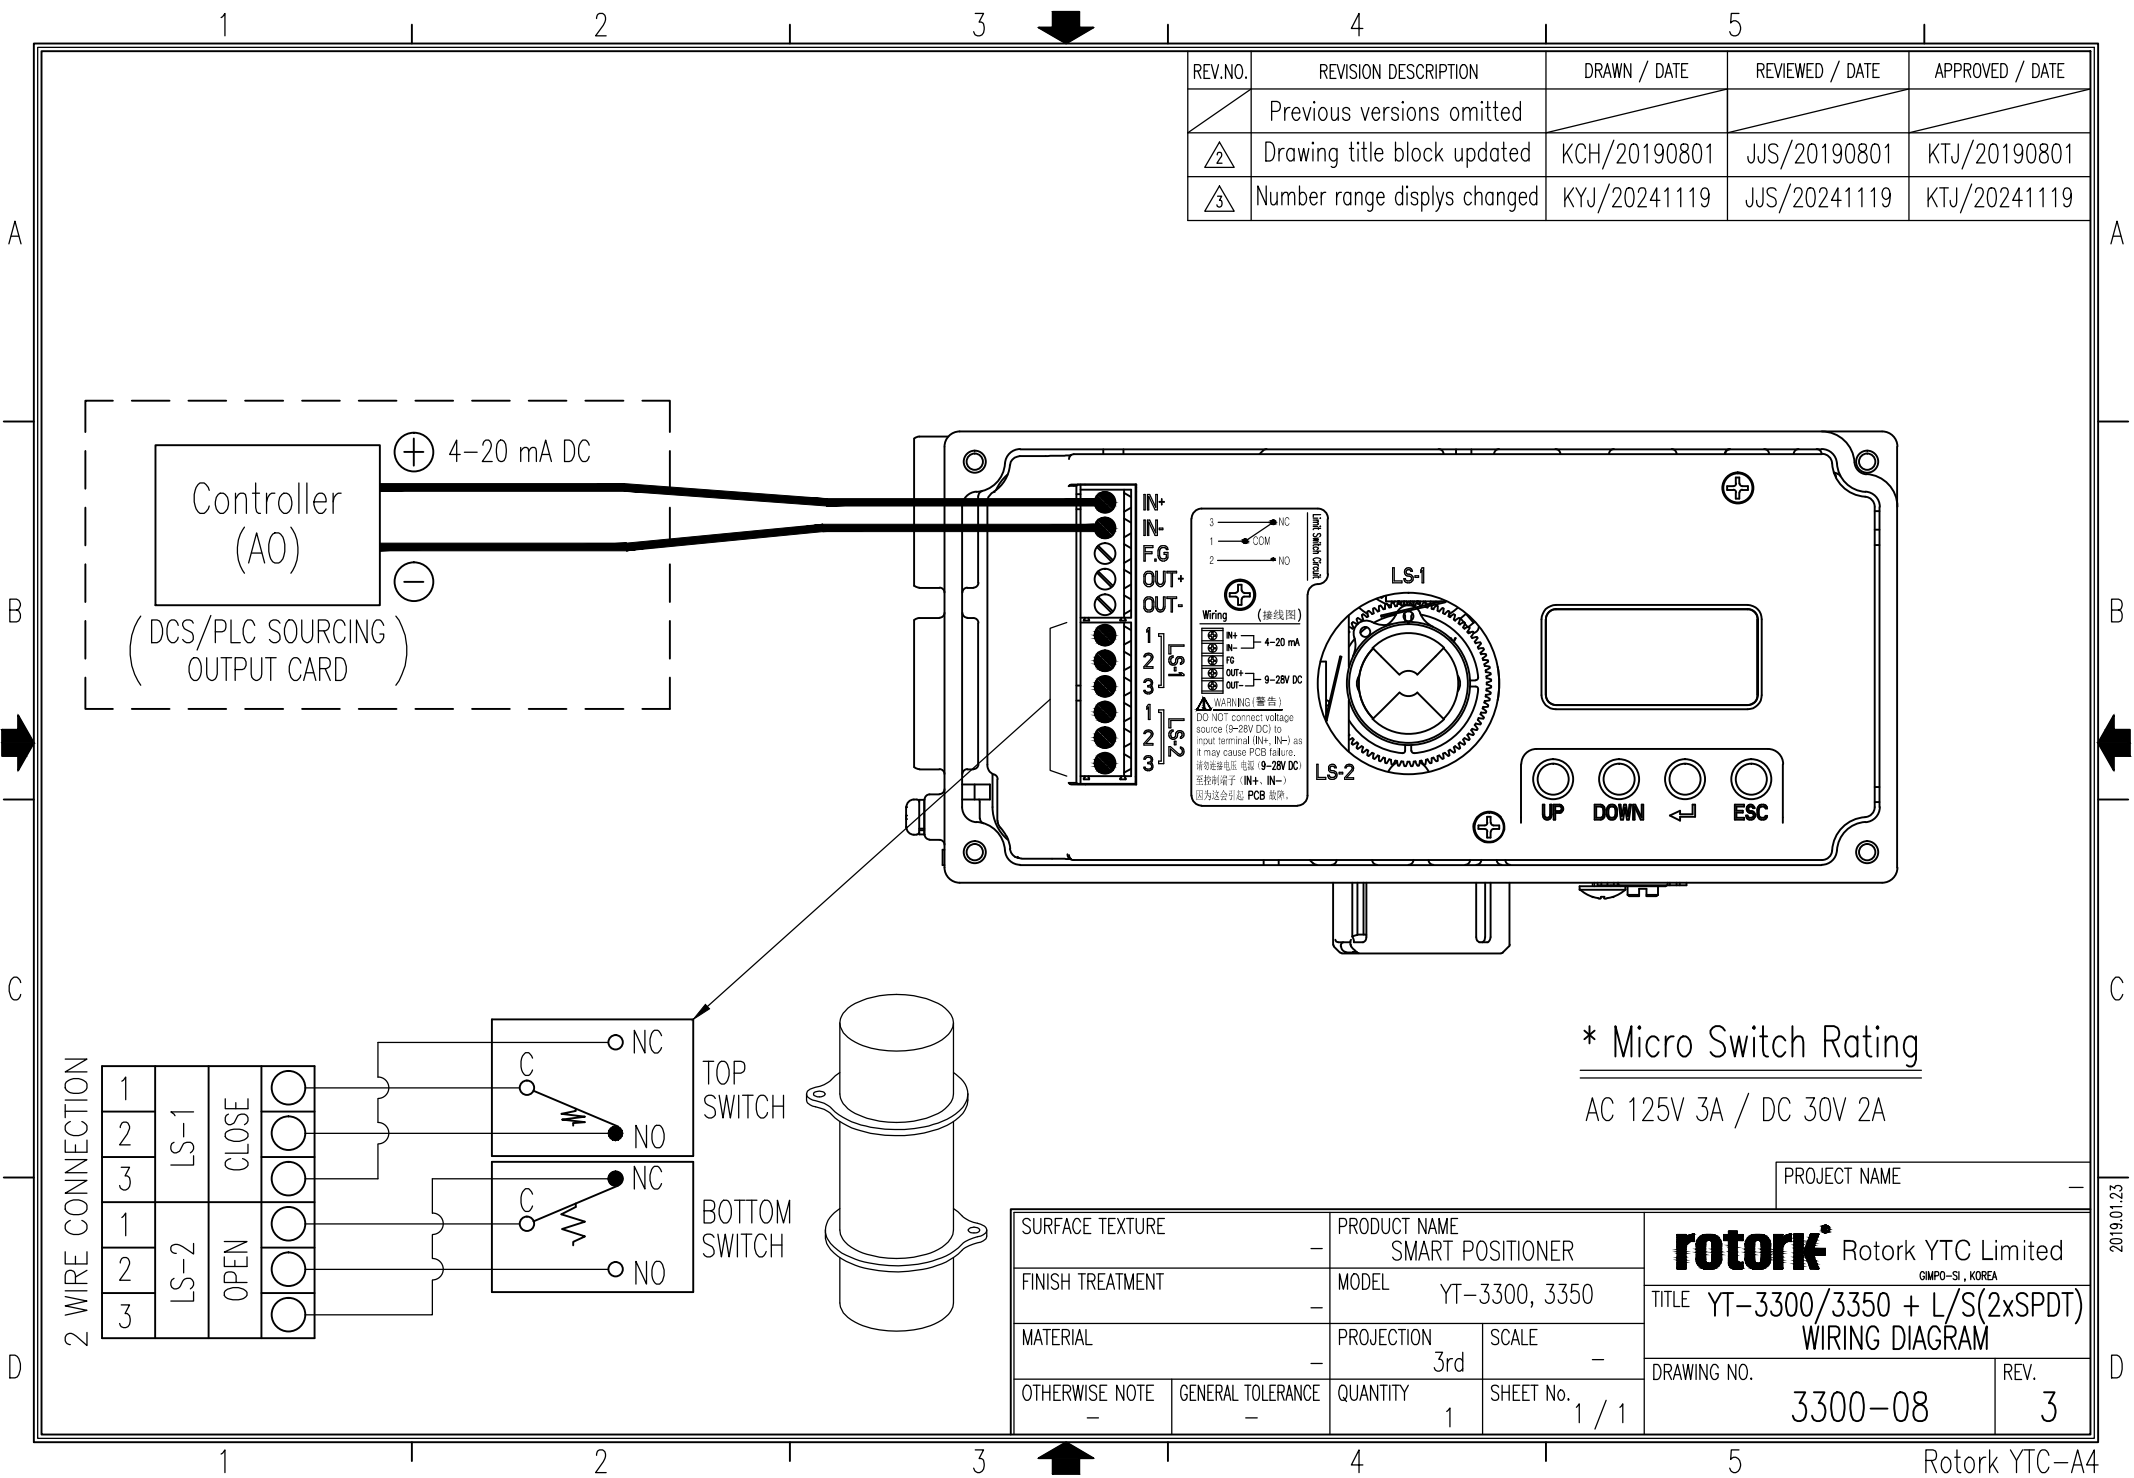

Wiring (接线图)

IN+ → 4-20 mA
 IN- → 9-28V DC
 OUT+ → 9-28V DC
 OUT- → 9-28V DC

WARNING (警告)
 DO NOT connect voltage source (9-28V DC) to input terminal (IN+, IN-) as it may cause PCB failure.
 请勿将电压 (9-28V DC) 连接到端子 (IN+, IN-) 因为这会引起 PCB 故障。

* Micro Switch Rating
 AC 125V 3A / DC 30V 2A

PROJECT NAME _____

SURFACE TEXTURE		PRODUCT NAME		rotork Rotork YTC Limited <small>GMPO-SI, KOREA</small>	
-		SMART POSITIONER			
FINISH TREATMENT		MODEL		TITLE	
-		YT-3300, 3350		YT-3300/3350 + L/S(2xSPDT)	
MATERIAL		PROJECTION	SCALE	WIRING DIAGRAM DRAWING NO. 3300-08 REV. 3	
-		3rd	-		
OTHERWISE NOTE	GENERAL TOLERANCE	QUANTITY	SHEET No.		
-	-	1	1 / 1		