


| REV.NO. | REVISION DESCRIPTION | DRAWN / DATE | REVIEWED / DATE | APPROVED / DATE |
|---------|-----------------------------|--------------|-----------------|-----------------|
| | Previous versions omitted | | | |
| 2 | PTM line modified | KCH/20191206 | JJS/20191206 | KTJ/20191206 |
| 3 | Number range dispys changed | KYJ/20241119 | JJS/20241119 | KTJ/20241119 |

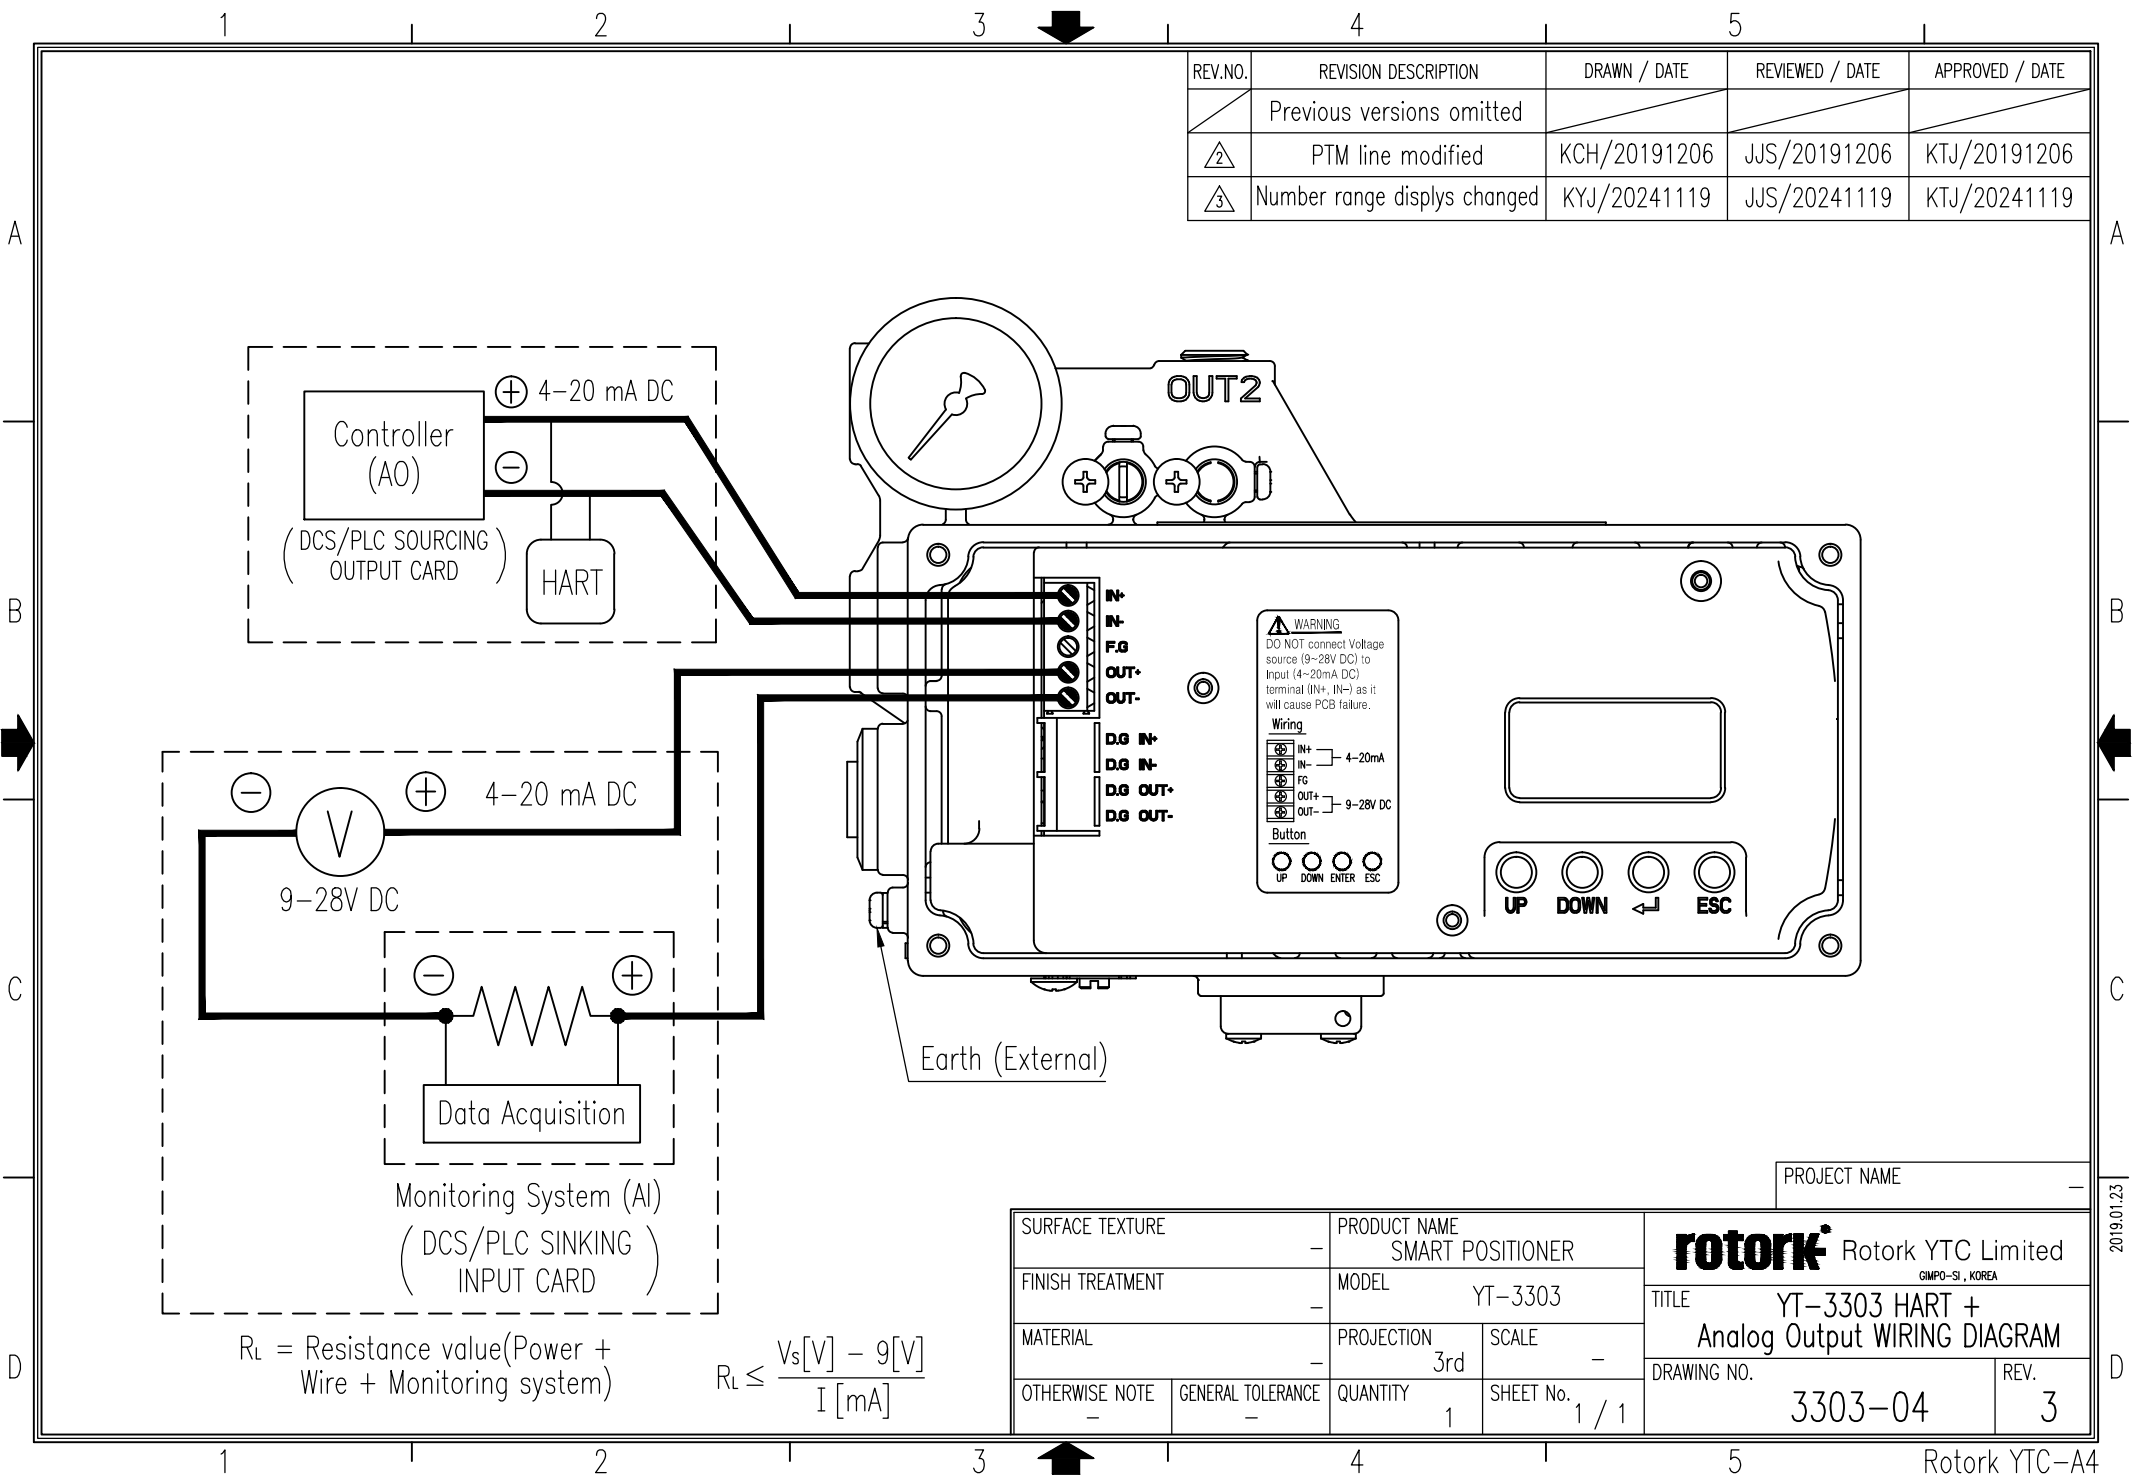

R_L = Resistance value(Power + Wire + Monitoring system)

$$R_L \leq \frac{V_s[V] - 9[V]}{I [mA]}$$

| | | | | | |
|------------------|--|-------------------|-----------|---|------|
| SURFACE TEXTURE | | PRODUCT NAME | | PROJECT NAME | |
| - | | SMART POSITIONER | | - | |
| FINISH TREATMENT | | MODEL | | rotork [®] Rotork YTC Limited | |
| - | | YT-3303 | | GIMPO-SI., KOREA | |
| MATERIAL | | PROJECTION | SCALE | TITLE | |
| - | | 3rd | - | YT-3303 HART + Analog Output WIRING DIAGRAM | |
| OTHERWISE NOTE | | GENERAL TOLERANCE | QUANTITY | DRAWING NO. | REV. |
| - | | - | 1 | 3303-04 | 3 |
| | | | SHEET No. | | |
| | | | 1 / 1 | | |