


REV.NO.	REVISION DESCRIPTION	DRAWN / DATE	REVIEWED / DATE	APPROVED / DATE
	Previous versions omitted			
2	PTM line modified	KCH/20191206	JJS/20191206	KTJ/20191206
3	Number range dispys changed	KYJ/20241119	JJS/20241119	KTJ/20241119

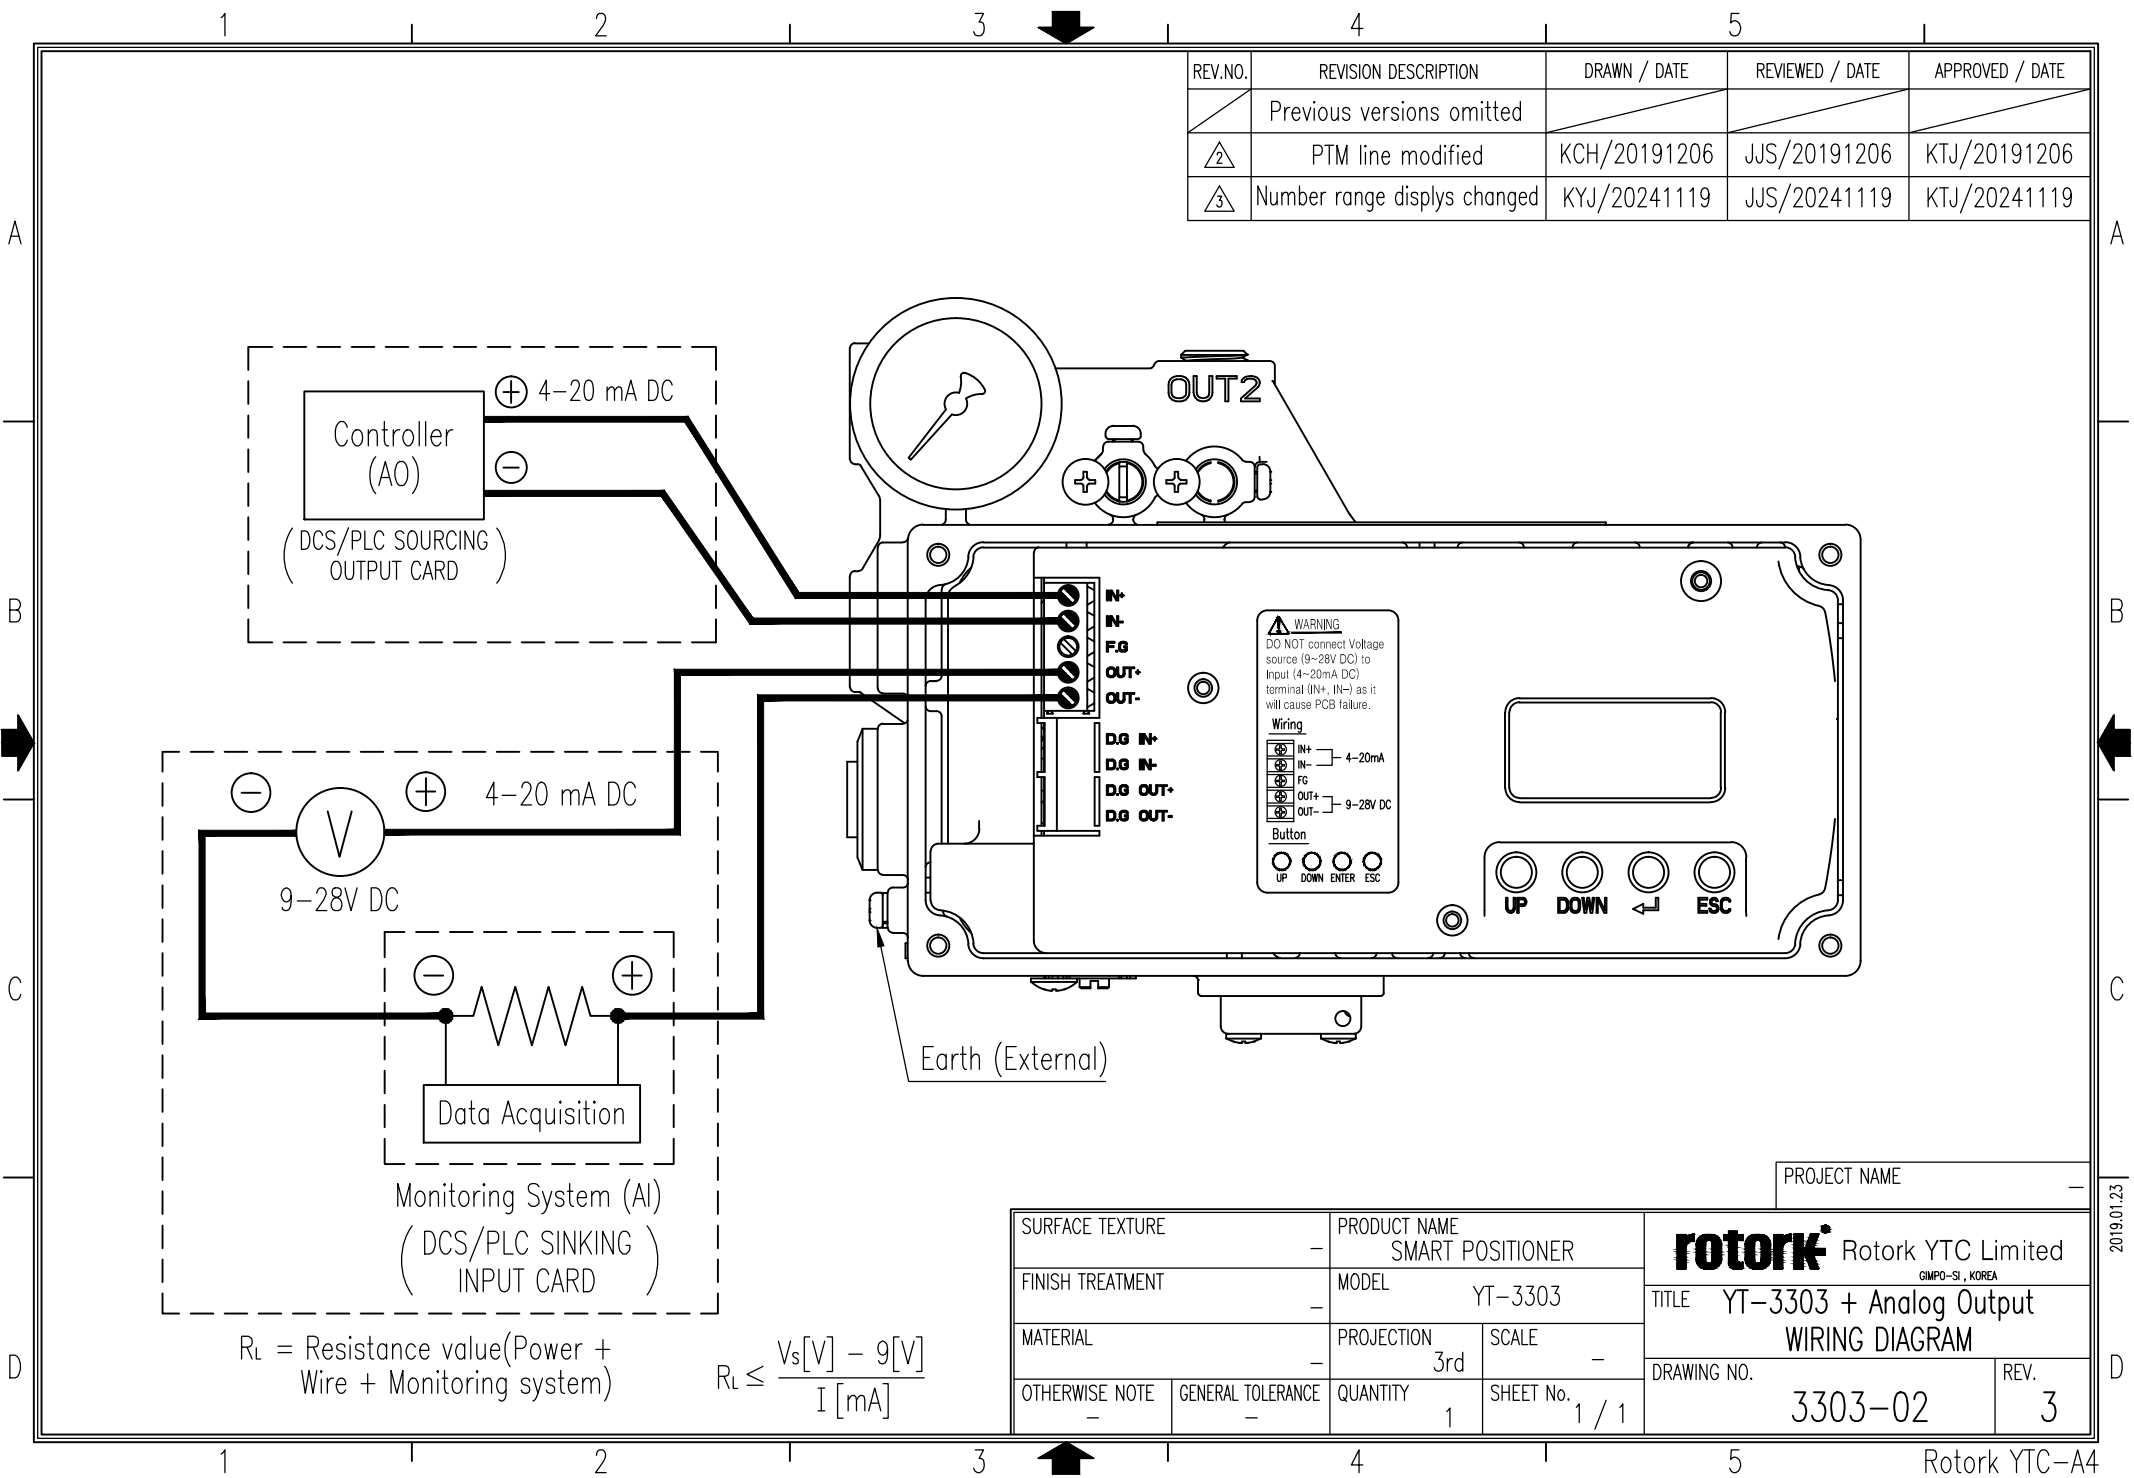

WARNING
 DO NOT connect Voltage source (9-28V DC) to Input (4-20mA DC) terminal (IN+, IN-) as it will cause PCB failure.

Wiring

- IN+ — 4-20mA
- IN- — 4-20mA
- F.G. — 9-28V DC
- OUT+ — 9-28V DC
- OUT- — 9-28V DC

Button

- UP
- DOWN
- ENTER
- ESC

$R_L = \text{Resistance value(Power + Wire + Monitoring system)}$

$$R_L \leq \frac{V_s[V] - 9[V]}{I [mA]}$$

SURFACE TEXTURE		PRODUCT NAME		PROJECT NAME	
-		SMART POSITIONER		-	
FINISH TREATMENT		MODEL		TITLE	
-		YT-3303		YT-3303 + Analog Output WIRING DIAGRAM	
MATERIAL		PROJECTION	SCALE	DRAWING NO.	
-		3rd	-	3303-02	
OTHERWISE NOTE	GENERAL TOLERANCE	QUANTITY	SHEET No.	REV.	
-	-	1	1 / 1	3	