



REV.NO.	REVISION DESCRIPTION	DRAWN / DATE	REVIEWED / DATE	APPROVED / DATE
△0	First Issued	KCH/20241126	JJS/20241126	KTJ/20241126
△1				

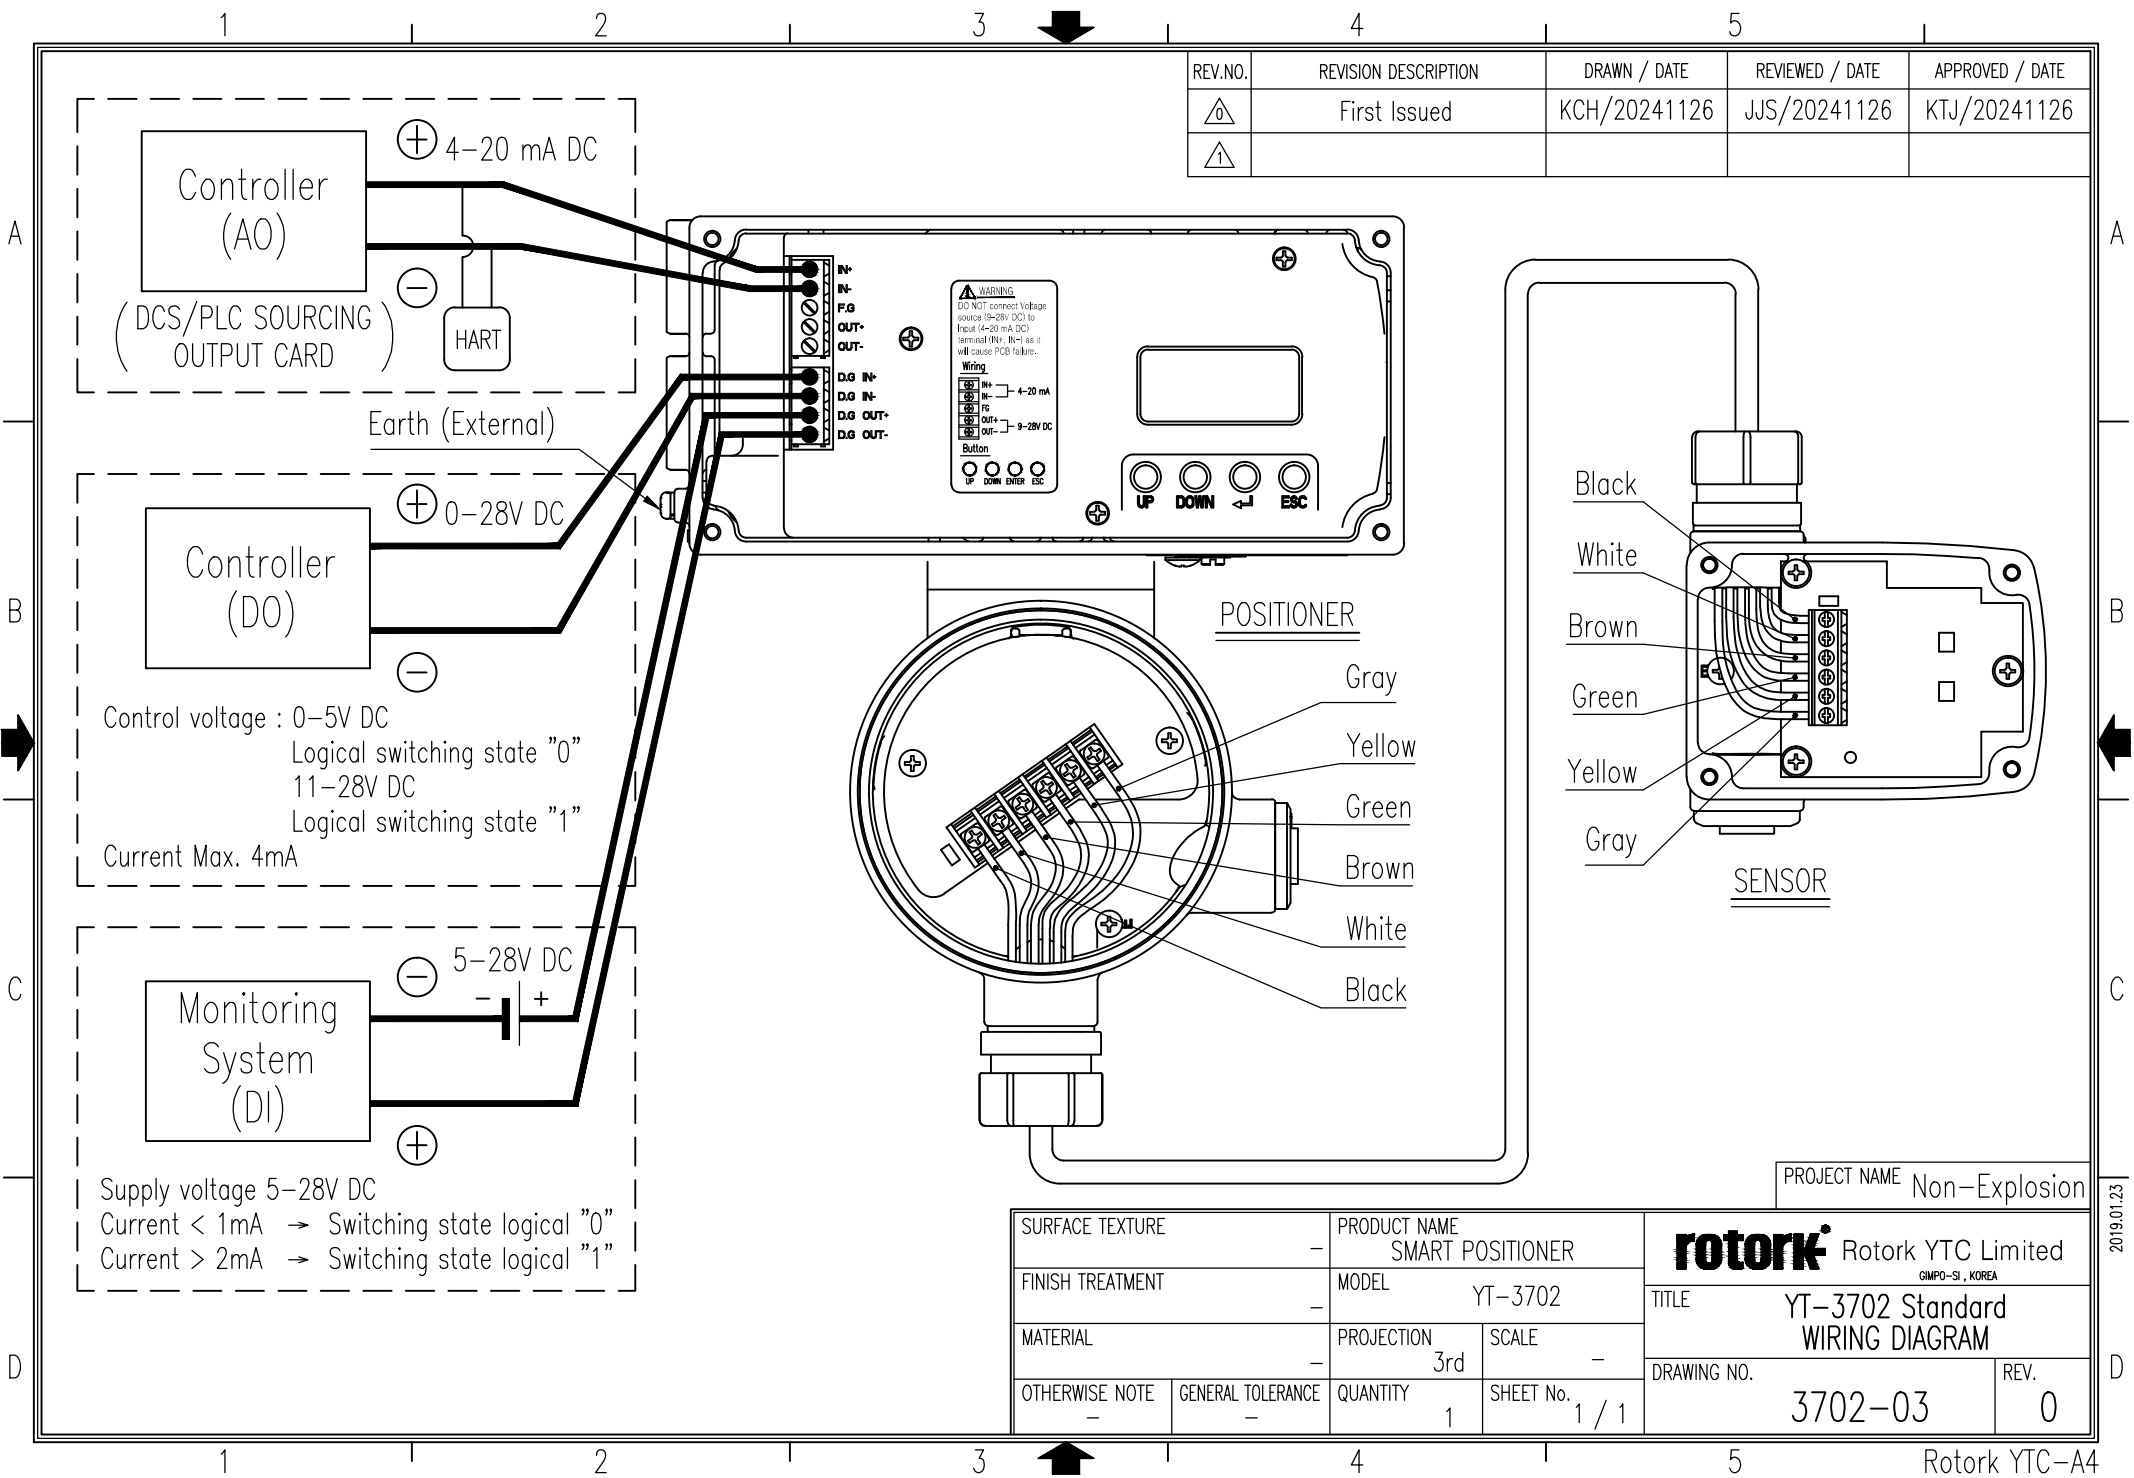

Control voltage : 0-5V DC  
 Logical switching state "0"  
 11-28V DC  
 Logical switching state "1"  
 Current Max. 4mA

Supply voltage 5-28V DC  
 Current < 1mA → Switching state logical "0"  
 Current > 2mA → Switching state logical "1"

SURFACE TEXTURE		PRODUCT NAME		 Rotork YTC Limited <small>GMPO-SI, KOREA</small>	
FINISH TREATMENT		SMART POSITIONER			
MATERIAL		MODEL	YT-3702	TITLE	
OTHERWISE NOTE		PROJECTION	3rd	YTC-3702 Standard WIRING DIAGRAM	
GENERAL TOLERANCE		SCALE	-	DRAWING NO.	3702-03
		QUANTITY	1	SHEET No.	1 / 1
					REV. 0

PROJECT NAME Non-Explosion