


* Mechanical Switch Rating

AC : 250V 3A, 125V 5A

DC : 250V 0.2A, 125V 0.4A, 30V 4A,
14V 5A, 8V 5A



REV.NO.	REVISION DESCRIPTION	DRAWN / DATE	REVIEWED / DATE	APPROVED / DATE
	Previous versions omitted			
△4	PTM line modified	KCH/20191206	JJS/20191206	KTJ/20191206
△5	Number range displs changed	KYJ/20250206	JJS/20250206	KTJ/20250206

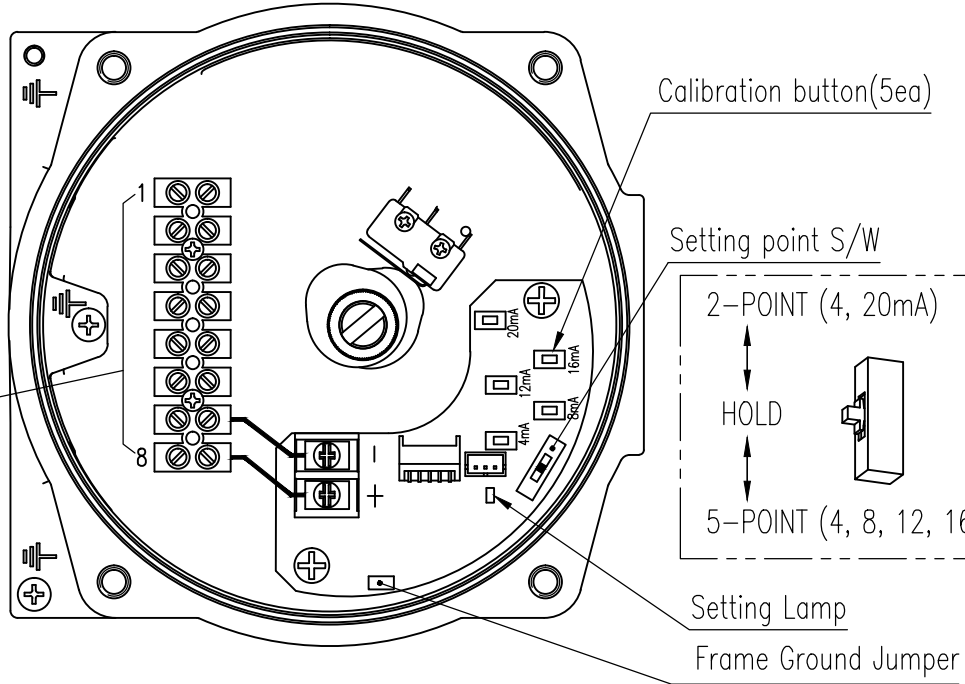

1	CLOSE	RED	NC
2		BLACK	NO
3		BLUE	NC
4		YELLOW	NO
5	OPEN	WHITE(GREEN)	NC
6		BROWN	NO
7	PTM		
8			

TOP SWITCH

BOTTOM SWITCH

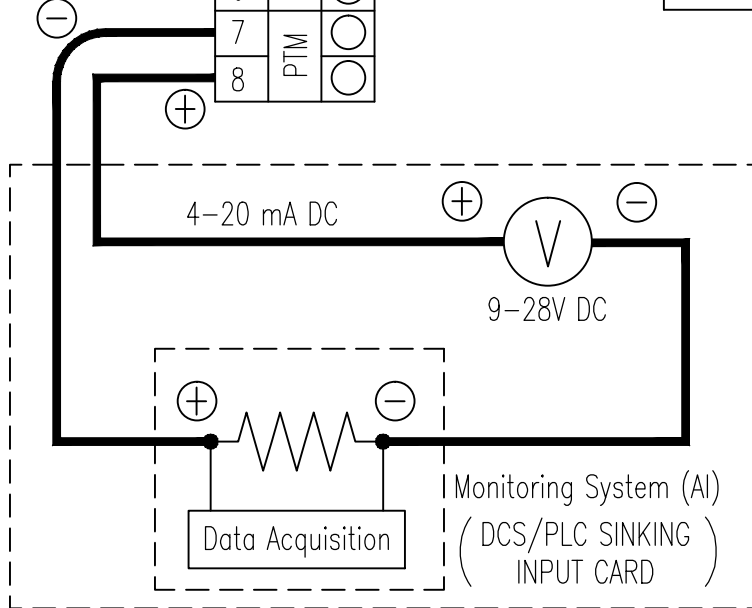

$$R_L \leq \frac{V_s[V] - 9[V]}{I[mA]}$$

R_L = Resistance value
(Power + Wire + Monitoring system)

PROJECT NAME

SURFACE TEXTURE	-	PRODUCT NAME	LIMIT SWITCH BOX
FINISH TREATMENT	-	MODEL	YT-870, 875
MATERIAL	-	PROJECTION	3rd
OTHERWISE NOTE	-	QUANTITY	1
GENERAL TOLERANCE	-	SCALE	-
		SHEET No.	1 / 1

rotork Rotork YTC Limited
GMPO-SI, KOREA
TITLE YT-870M, 875M (2xSPDT + SPTM) WIRING DIAGRAM
DRAWING NO. 870-05
REV. 5

2019.01.23