
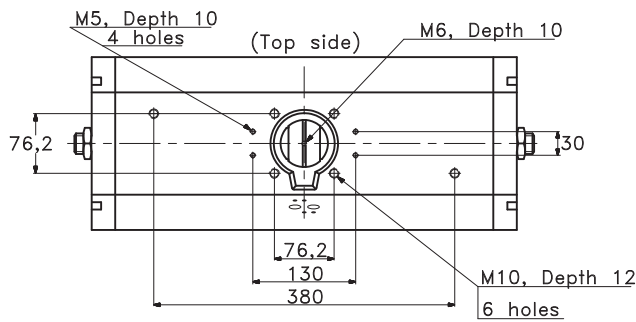
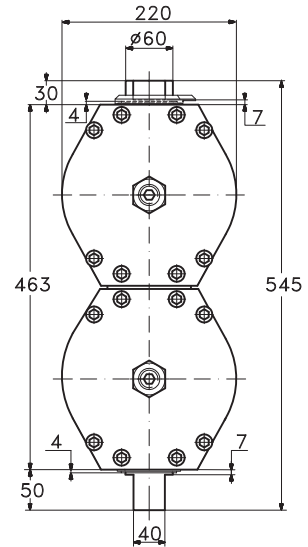




# RC88-DA

## Pneumatic Actuators

### MEASUREMENTS

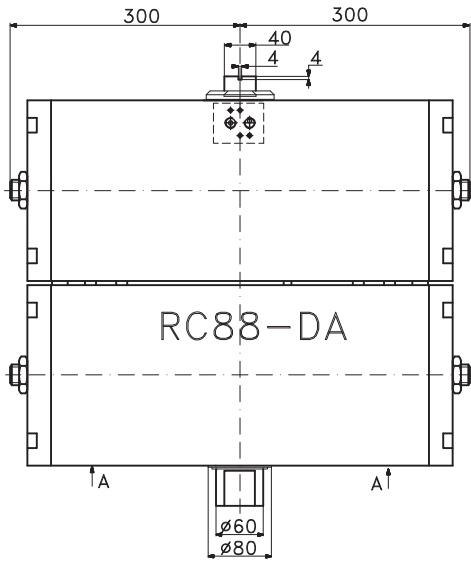


View: A-A  
(Valve side)

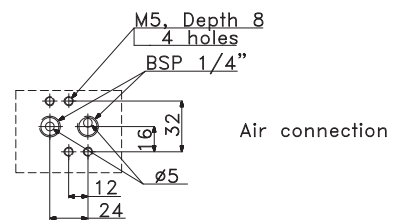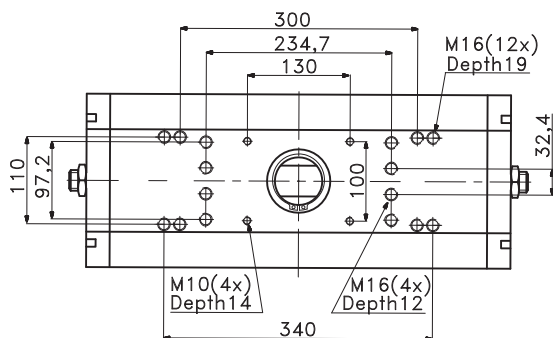

# RC88-SR

## MEASUREMENTS

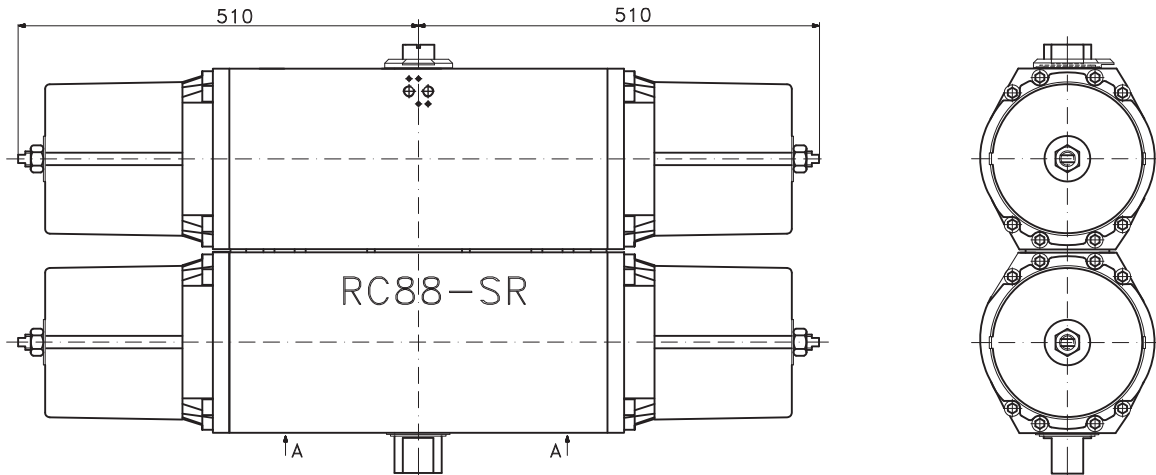

Type	Weight	Torque at 6 bar (Nm)		
		↔		
		0°	50°	90°
RC88-DA	79 kg	7600	3800	5480

Type	Weight	Torque at 6 bar (Nm)					
		Air →			Spring →		
		0°	60°	90°	90°	30°	0°
RC88-SR	134 kg	4160	1800	2220	3680	1800	2520

Air consumption, free air at 6 bar, dm <sup>3</sup>	
RC88-DA	Anticlockwise rotation: 132. Clockwise rotation: 134
RC88-SR	132

Operation time at 6 bar, Sec.	
RC88-DA	RC88-SR
<10	<10

Max pressure:

RC88-DA: 7 bar / 100 psi

RC88-SR: 6 bar / 87 psi

For further information, see instruction No. 706

We reserve the right to changes without notice.



Remote Control  
P O Box 80  
Kontrollvägen 15  
SE-791 22 Falun  
Sweden  
Tel +46 (0)23-587 00  
Fax +46 (0)23-587 45  
www.remotecontrol.se  
info@remotecontrol.se



Remote Control  
Gutenbergstr. 22  
DE-41564 Kaarst-Büttgen  
Germany  
Tel +49 (0)2131-795 760  
Fax +49 (0)2131-795 7615  
www.remotecontrol.de  
info@remotecontrol.de



Remote Control  
Unit 40, Trent Valley Works,  
Station Road, Rugeley  
Staffordshire WS15 3HB  
England  
Tel +44 (0)1889-576 888  
Fax +44 (0)1889-577 676  
www.remotecontrol.co.uk  
info@remotecontrol.co.uk



Remote Control  
No. 9, Kaki Bukit Road 1  
#03-03, Eunos Technolink  
Singapore 415938  
Tel +65 6848 7150  
Fax +65 6746 5815  
www.remotecontrol.com.sg  
info@remotecontrol.com.sg



Remote Control  
PO Box 355  
77 Circuit Drive  
North Kingstown, RI 02852  
USA  
Tel +1 (401) 294-1400  
Fax +1 (401) 294-3388  
www.rciactuators.com  
info@remotecontrol.us